MURR ELEKTRONIK
stay connected

## MODLINK MSDD FRAME DBL TRANSPARENT


Closure 3 mm double bit incl. pluggable knob


Frame: plastic PA black
Lid: plastic, PC transparent
Closure: 3 mm double bit
with attachable rotation knob

**Link to Product**

### Illustration



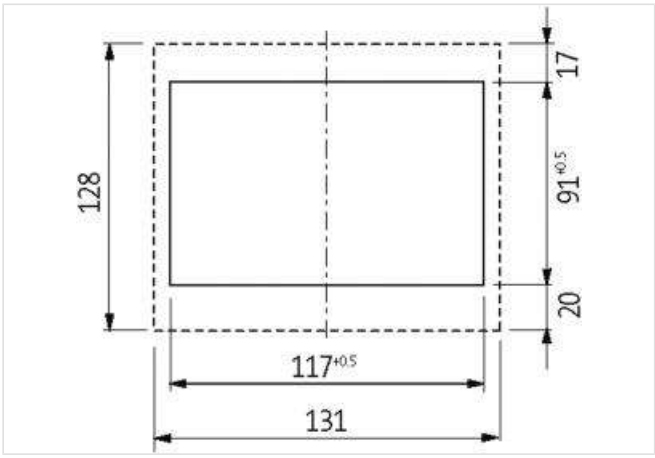

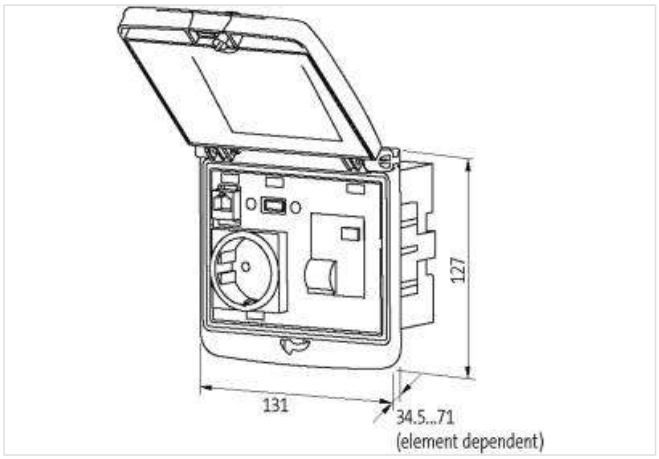
Product may differ from Image

### Commercial data

| | |
|---|---|
| ECLASS-6.0 | 27189217 |
| ECLASS-6.1 | 27189260 |
| ECLASS-7.0 | 27189260 |
| ECLASS-8.0 | 27189260 |
| ECLASS-9.0 | 27189260 |
| ECLASS-10.1 | 27182810 |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-01-31

MURR ELEKTRONIK
stay connected

| | |
|---|---|
| ECLASS-11.1 | 27182810 |
| ECLASS-12.0 | 27182810 |
| ETIM-5.0 | EC002625 |
| customs tariff number | 85389099 |
| GTIN | 4048879368858 |
| Packaging unit | 1 |

**Mechanical data | Mounting data**

| | |
|---|---|
| Height | 127 mm |
| Width | 131 mm |
| Depth | 43 mm |

**Frame**

| | |
|---|---|
| Degree of protection (EN IEC 60529) | IP65 |
| Operating temperature min. | -30 °C |
| Operating temperature max. | 70 °C |
| Storage temperature min. | -30 °C |
| Storage temperature max. | 80 °C |
| Suitable for installation wall thickness min. | 1 mm |
| Suitable for installation wall thickness max. | 5 mm |
| Color cover | transparent |
| Color housing | black |
| Material lid | PC |
| Material housing | PA |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-01-31