stay connected

MIRO 6.2 OPTO-COUPLER MODULE

IN: 30 VDC - OUT: 48 VDC / 0,1 A / 500kHz

Transistor 0.1 A
24 V DC
Switching frequency: max. 500 kHz
Spring clamp terminals

Link to Product

Illustration



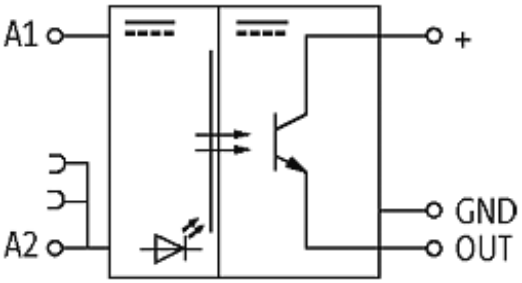

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16

MURR ELEKTRONIK
stay connected

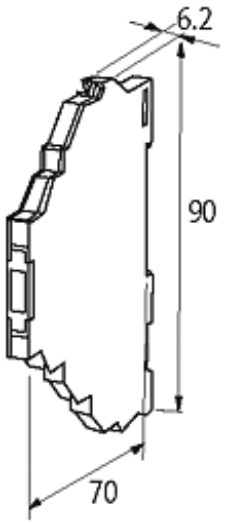

Product may differ from Image

Approvals

Input

Voltage range ON	10...30 V DC
Voltage range OFF	0...7 V DC
Control current	5.5 mA
LED display	LED (yellow)

General data

Test isolation voltage	2.75 kV
Housing	Black plastic, flame retardant
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Dimensions H × W × D	90×6.2×65 mm

Output

Switching voltage	5...48 V DC
Switching current per output	0...0.1 A
Saturation voltage (across output)	max. 1.2 V AC/DC
Leakage current (output is open)	max. 250 µA
Switching time ON/OFF	0.4/0.1 µs
Switching frequency	500 kHz (ohmic)

Commercial data

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16