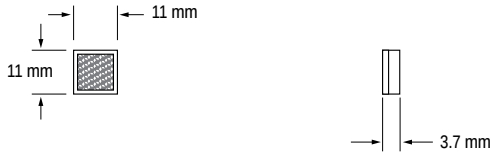
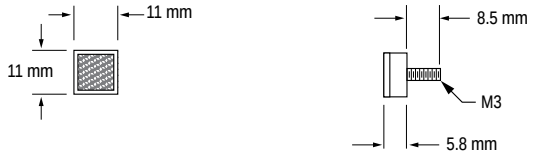
## BRT-11X11M

Description: Square, acrylic target
Reflectivity Factor: 1.2
Temperature: -20° to +60° C
Other: This target has micro-prism geometry.



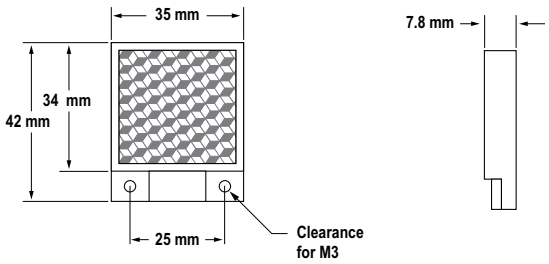

## BRT-11X11MD

Description: Square, acrylic target with mounting stud
Reflectivity Factor: 1.2
Temperature: -20° to +60° C
Other: This target has micro-prism geometry.



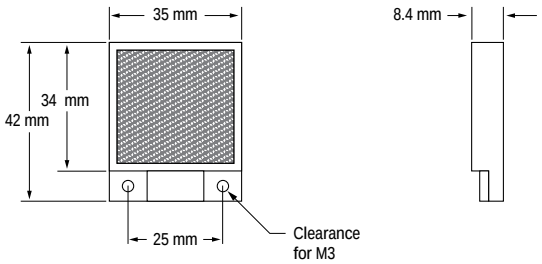

## BRT-35X35B

Description: Square, acrylic target
Reflectivity Factor: 1.3
Temperature: -20° to +60° C



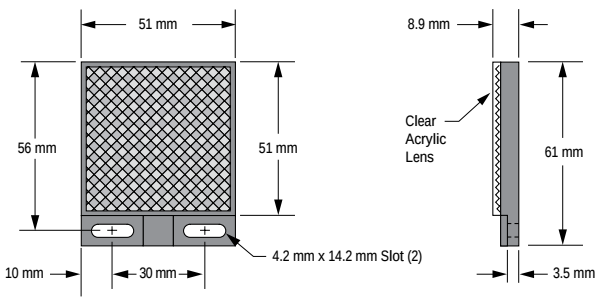

## BRT-35X35BM

Description: Square, acrylic target
Reflectivity Factor: 1.2
Temperature: -20° to +60° C
Other: This target has micro-prism geometry.



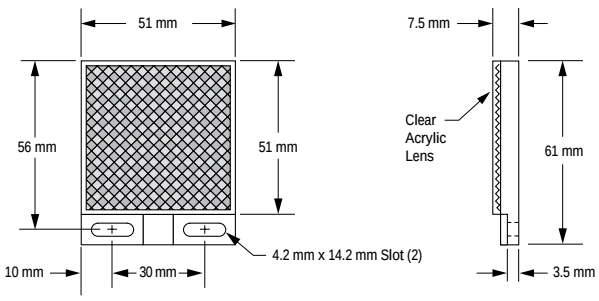

## BRT-2X2

Description: Square, acrylic target
Reflectivity Factor: 1.0
Max. Temperature: 50° C
Others: Optional brackets are available. See page 620.




## BRT-2X2LVC

Description: Square, acrylic target
Reflectivity Factor: 1.0
Max. Temperature: -20° to +60° C
Others: Optional brackets are available. See page 620.




More
on next
page