prevost
Compressed Air Expert

PREVOST FILTRATION - SINGLE UNITS

Filter



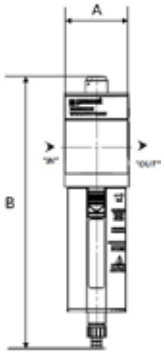

Max. operating pressure	Filtration (µm)	Min. / Max temperature
10 bar	25	5 / 50 °C

Part number	Female thread	Flow rate at 6 bar (l/min) (ΔP= 0.3 bar)	Net weight (Kg)	Dim. A (mm)	Dim. B (mm)
ATU F25100	G1/8	700	0.323	40	169.5
ATU F25101	G1/4	950	0,323	40	169.5
ATU F25102	G3/8	2200	0,876	62	235
ATU F25103	G1/2	3300	0,65	62	235