
MUELLER® DATASHEET

BU-P4290

(Adapter: Female BNC to Male SMA)

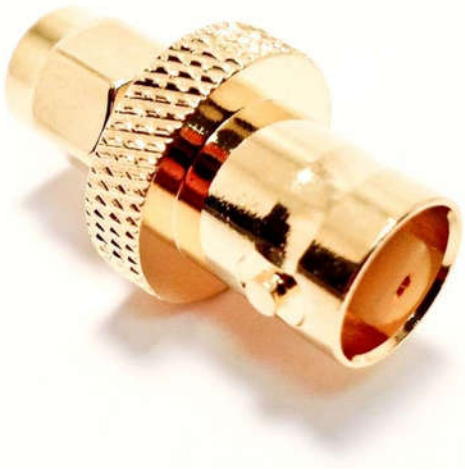

- Material: Body: Gold plated brass
  Contacts: Gold plated beryllium copper
  Insulator: PTFE
- Length: 1.02” (26 mm), OD: .59” (15mm)
- Impedance: 50Ω
- Frequency: 0 to 12.4 GHz
- Voltage: Shield/Contact: 335 VRMS Max.
  Shield/Earth: 30 VAC Max.
- Operating Temperature: -50ºC to 170ºC
- RoHS Compliant

Mueller Electric Company
1208 Massillon Rd. Ste. N-1500
Akron, OH 44306-4524

www.muellerelectric.com

Toll Free: 800.955.2629
Phone: 330.780.2525
Fax: 330.780.2524