HIRSCHMANN® Test & Measurement
A BRAND OF SKS

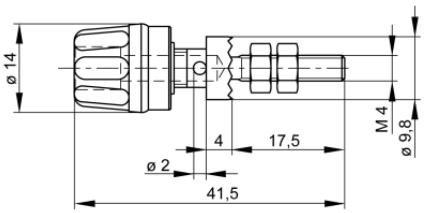
SKS Kontakttechnik GmbH

Sockets



PK 10 A

CE

Product	PK 10 A
description	Pole terminal with claw edge and captive insulated head. 4 mm diameter nickel-plated brass threaded bolt with 2 mm diameter transverse hole. For installation in equipment chassis and switch panels.
operating instruction	BA403
article-no. / *colour	9300991xx 00 black, 01 red, 02 blue, 03 yellow, 04 green, 05 brown, 06 gray, 07 white, 09 violet, 88 yellow green Ni
drawing	
	
technical data	
connection	M4 thread
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O [2]
rated current (consider derating curve)	16 A
material socket	brass, nickel plated
housing material	PA
temperature range acc. To IEC61010[1]	-25 °C to +100 °C

[1] contact the manufacturer for applications at deviating temperature ranges
[2] without rated measurement category, for other circuits that are not directly connected to mains
stand: 21.06.2022

stand: 21.06.2022

4 mm system