REF : FHP

High quality loudspeaker cable

S2CEB AUDIO VIDEO BROADCAST

Ed. 6 11/08 TM

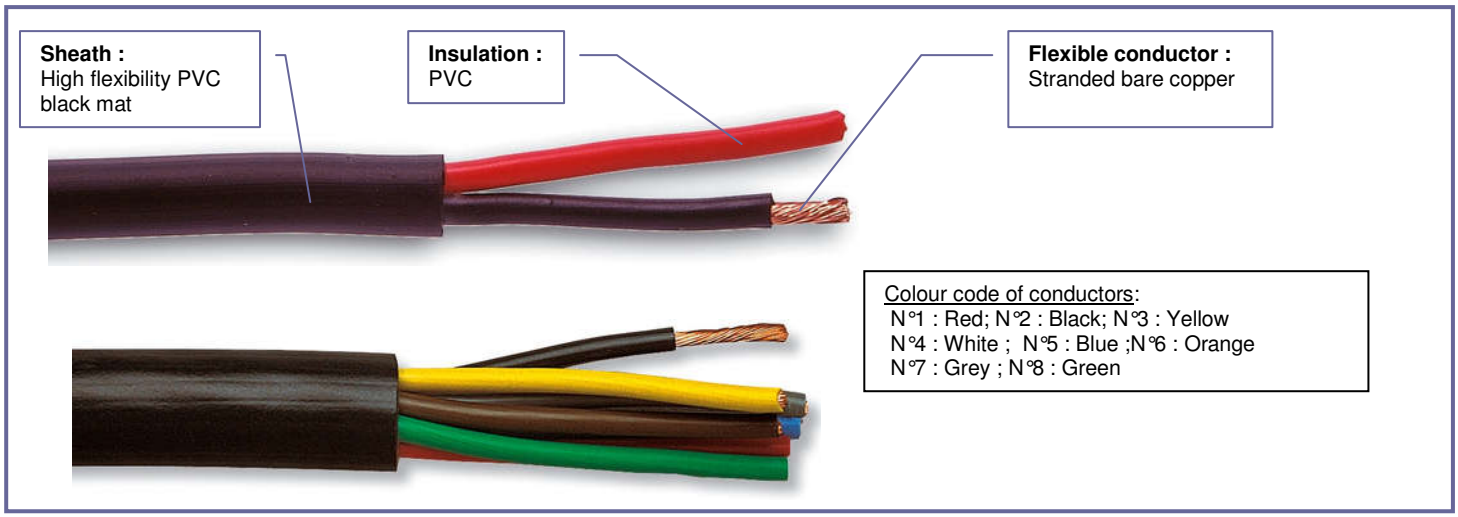

PRODUCTS INFORMATIONS

Application

Wiring all types of sound systems.
Connect amplifiers and loudspeakers.
For fixed and mobile installations.
Public address.

Electrical properties

Max. voltage : **300 V**

Test voltage (50 Hz – 1 min) : **> 2000 V**

Conductor resistance at 20°C :
Section 1,5 mm² : **< 13,3 Ω/km**
Section 2,5 mm² : **< 7,98 Ω/km**
Section 4 mm² : **< 4,95 Ω/km**

Insulation resistance at 20°C : **> 100 MΩ.km**

Characteristics

Temperature range :
Fixed use : - 20°C → + 70°C
Mobile use : - 10°C → + 70°C

Minimum bending radius :
Fixed use : 5 x Ø
Mobile use : 10 x Ø

Conform to RoHS directive

Products references

REF.	nxmm²	mm ext.	Kg/Km
FHP 215	2 x 1,5	6,2	60
FHP 225	2 x 2,5	7,4	87
FHP 425	4 x 2,5	10,25	160
FHP 525	5 x 2,5	10,8	205
FHP 625	6 x 2,5	13,0	260
FHP 825	8 x 2,5	15,8	350
FHP 2400	2 x 4,0	10,2	130
FHP 4400	4 x 4,0	12,2	260
FHP 8400	8 x 4,0	18,5	582

This document is confidential, and is the property of CAE Groupe. CAE Groupe own the copyright, and the document must not be copied or changed in any form, wholly or in part without written permission from CAE Groupe. The contents of this document must be disclosed to any other person or persons.
The characteristics related to this document are not contractual, and can be modified without warning.