
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 5/12/10 | D.GRIFFIN |
| | | | |
| | | | |
| | | | |

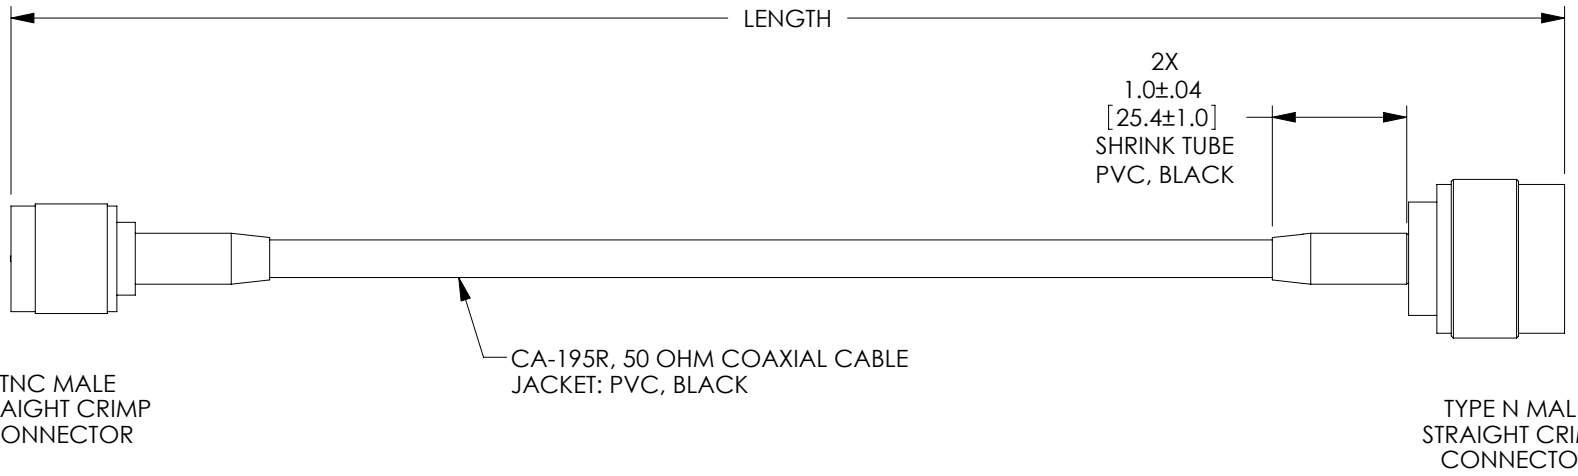


| LENGTH CODE CHART | | |
|---|---|---|
| CABLE# & LENGTH | LENGTH SYMBOL | EXAMPLES OF PART# USED |
| CA-TMNMAXXX | WHERE XXX = LENGTH IN FEET | CA-TMNMA010 (10 FEET) |
| CA-TMNMANXX | WHERE NXX = LENGTH IN INCHES | CA-TMNMAN16 (16 INCHES) |
| CA-TMNMAMXX | WHERE MXX = LENGTH IN METERS | CA-TMNMAM07 (7 METERS) |
| CA-TMNMAXMX | WHERE XMX = LENGTH IN DECIMAL METERS | CA-TMNMA3M5 (3.5 METERS) |

**RoHS Compliant** ✔

NOTES:

CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.

CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005

PROJECTION

| APPROVALS | DATE |
|---|---|
| DRAWN BY D.FRISIELLO | 5/11/10 |
| CHECKED BY K.BURGNER | 5/11/10 |
| APPROVED BY K.BURGNER | 5/11/10 |

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
COAXIAL

PRODUCT DESCRIPTION
CA, CA-195 TNC-MALE/N-MALE

| SIZE | FSCM NO. | DWG. NO. | REV. |
|---|---|---|---|
| A | 43321 | CA-TMNMA | A |

SCALE: NONE | CAD FILE: CA-TMNMA.SLDDRW | SHEET 1 OF 1