
# LB 4-1,5 S /...20

## Laboratory socket

Ø 4mm-Sicherheit | 1000 V CAT II | 20 A

- suitable to install a permanent measuring point with a socket. For that the pin is screwed or clamped under
- pin length 20 mm



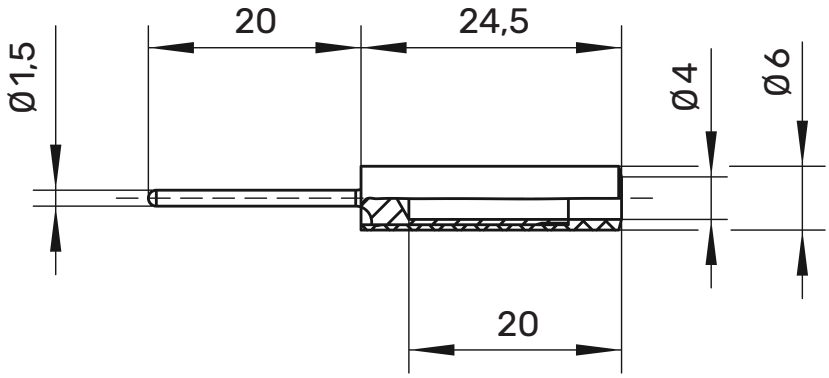


WH 001

## General information

| | |
|---|---|
| **Order No.** [1] | **LB 4-1,5 S Ni \| Au /20 ...(Farbe)** |
| **colours** | black, red, blue, yellow, green, grey, brown, white, purple |
| **contact parts** | nickel-plated \| gold-plated |
| **insulation** | PA 6.6 (UV94-2) |

## Technical data

| | |
|---|---|
| **terminal** | pin |
| **transition resistance** | 10 mΩ (Ni)/ 5 mΩ (Au) |
| **rated voltage** [2] | 1000 V CAT II |
| **rated current** [2] | 20 A |
| **operating temperature** | from -25 °C to +80 °C |

[1] other contact platings, colours and designs on request
[2] at normal ambient temperatures

*date: 27.02.2026*

# Artikelnummern
# Article numbers

SCHÜTZINGER

| LB 4-1,5 S/..20 | | | | Ni | Au |
|---|---|---|---|---|---|
| ● | SW | Schwarz | Black | 99002380 | 99002390 |
| ● | RT | Rot | Red | 99002379 | |
| ● | BL | Blau | Blue | 99002376 | 99002388 |
| ● | GE | Gelb | Yellow | 99002377 | |
| ● | GN | Grün | Green | 99002378 | |
| ● | GR | Grau | Grey | 99014028 | |
| ● | BR | Braun | Brown | 99014029 | |
| ○ | WS | Weiß | White | | |
| ● | VI | Violett | Purple | | |