
Product data sheet
Characteristics

ZCKD34
limit switch head ZCKD - steel ball bearing mounted roller lever

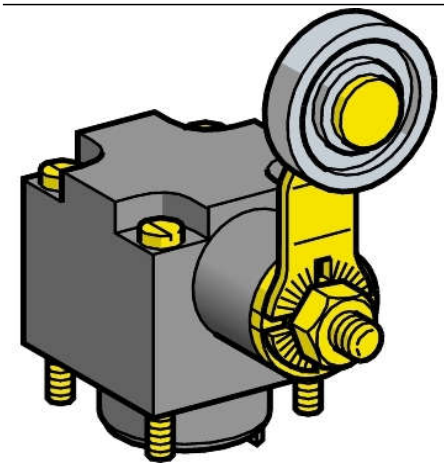

Main

Range of product	OsiSense XC
Series name	Standard format
Product or component type	Limit switch head
Device short name	ZCKD
Head type	Rotary head
Product compatibility	XCKS
Associated body	ZCKS7 ZCKSD39H29 ZCKSD37H29 ZCKSD35H29 ZCKS6H29 ZCKS9H29 ZCKS1 ZCKS2 ZCKS6 ZCKS2H29 ZCKSD37 ZCKS8H29 ZCKSD35 ZCKS5 ZCKS1H29 ZCKSD39 ZCKS5H29 ZCKS8 ZCKS9 ZCKSD31H29 ZCKSD31 ZCKS7H29
Movement of operating head	Rotary
Type of operator	Roller lever spring return metal (ball bearing mounted)
Type of approach	Lateral approach, 2 directions

Complementary

Switch actuation	By 30° cam
Positive opening	With
Head material	Plastic

Environment

Ambient air temperature for operation	-25…70 °C
Ambient air temperature for storage	-40…70 °C
Environmental characteristic	Standard environment

Packing Units

Package 1 Weight	93 g

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Offer Sustainability

Sustainable offer status	Green Premium product
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile

Contractual warranty

Warranty	18 months