



- Daily program
- Slim format 17,5 mm
- Captive setting keys
- Manual override switch
- Permanently ON / AUTO

Highlights

- Easy programming with captive setting keys
- Easy to read switching program
- Manual override switch Permanently ON / AUTO
- Simple to install

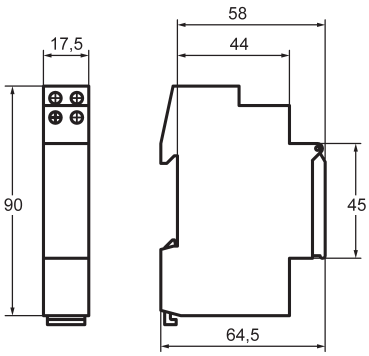

VS 10/14



Time Switches VS 10/14

for DIN-rail mounting

Technical data

Voltages	230 V, 50–60 Hz
Power consumption	approx. 1 VA
Switch (potential-free)	Normally open, gap < 3 mm (μ)
Contact material	AgCdO
Switching capacity	16 A / 250 V~ at cosφ=1 1.5 A with inductive load max. filament lamp load 2000 W
Minimum switching interval	15 min
Time base	Quartz
Power back-up (at 20°C)	≧ 70 h
Accuracy (at 20°C)	≦ ±1.5 sec/day
Permitted ambient temperature	–5°…+50°C
Enclosure	self-extinguishing thermoplast
Dimensions	45 x 17.5 x 58 mm
DIN-rail mounting	35 mm section rail (DIN EN 50022)
Type of connection	Screw terminals
Type of protection	IP 20 to DIN EN 60529
Class of protection	II when installed according to regulations

Rights to technical amendments reserved.

Type/Order No.	Version
VS 10.18	Day without reserve
VS 14.18	Day with reserve