Mini / MC55

# MC55 Touch 24VDC O PNP Buzzer




| | |
|---|---|
| **Part No.:** | **240.290.55** |
| **Series:** | **MC55** |

| MECHANICAL DATA | |
|---|---|
| Height | 79 mm |
| Diameter | 55 mm |
| Materials | PC |
| Dome colour | Tranclucent |
| Housing colour | Black |
| Protection category | IP65<br>IP69K |
| Connection | M12 plug 5-pole |
| Type of fixing | Built-in mounting |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 94 g |
| Product weight | 66 g |

| ELECTRICAL DATA | |
|---|---|
| Operating voltage | 24V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 60 mA |
| Continuous output current | max. 200mA |
| Protection class | Protection class 2 |
| Pollution degree | 3<br>In the connection area: 2 |
| Overvoltage category | I |

| OPTICAL DATA | |
|---|---|
| Light source | LED |
| Light colour | MC 3 colours |
| Optical signal image | Permanent |
| Service life optical | 50,000 h maximum |

| ACOUSTIC DATA | |
|---|---|
| Volume (max) at 1m distance | 85 |
| Acoustic signal image | Continuous tone |
| Audio frequency | 3480 Hz |
| Acoustic service life | 5,000 h minimum |

| APPROVAL DATA | |
|---|---|
| Conforms with CE | Yes |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini / MC55

# MC55 Touch 24VDC O PNP Buzzer


| | |
|---|---|
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with RED directive | No |
| Conforms with ATEX-directive | No |
| Conforms with CCC-Ex | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 4X |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | No |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | 10 years |
| Conforms with VdS | No |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini / MC55

# MC55 Touch 24VDC O PNP Buzzer

## DRAWING

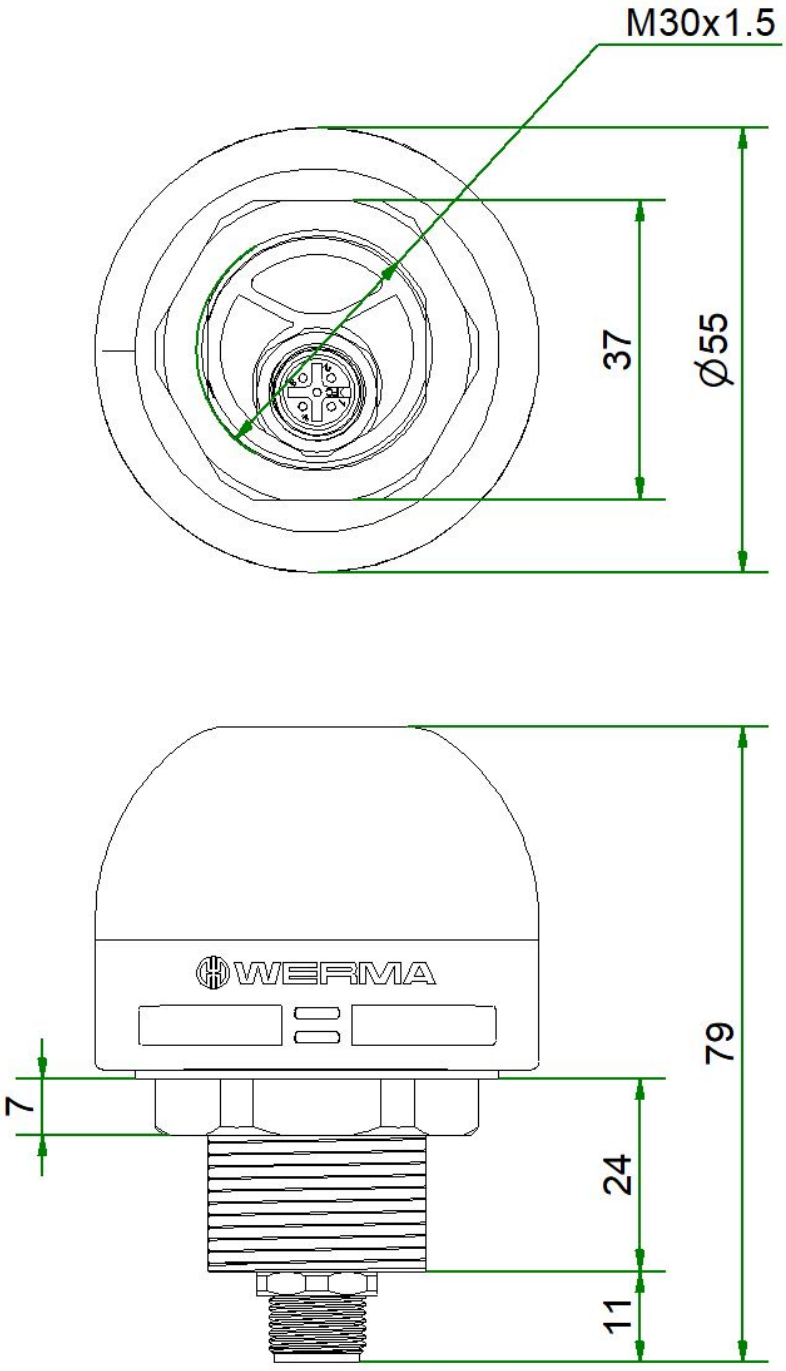


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.