119 x 38mm (4.7" X 1.5") **AC FAN**

4000N & X Series

Terminals
Air Intake – Over Struts



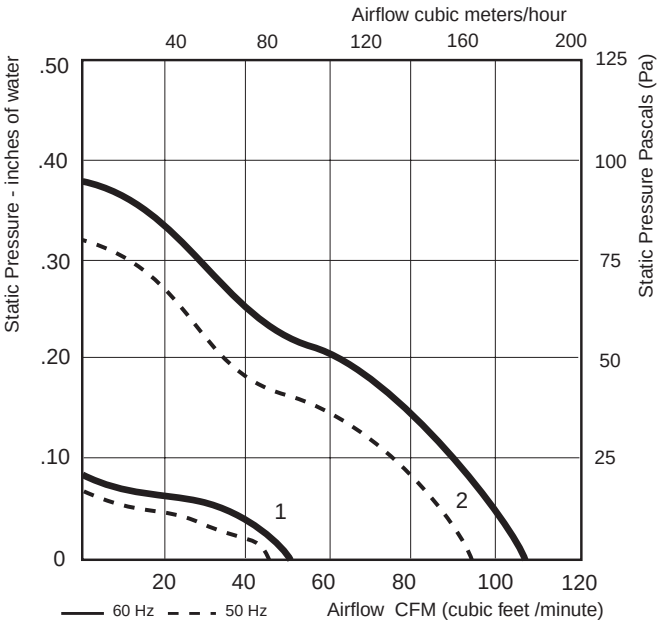

DIMENSIONS

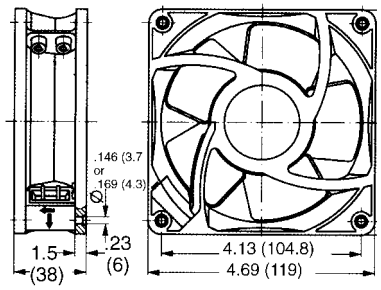

AVAILABLE WITH:

HIGH PERFORMANCE
SINTEC
SLEEVE BEARING SYSTEM

4.69" X 4.69" X 1.50" AC Fan, All Metal, Air intake – Over struts

Curve	PART NUMBER	Type of Bearing	AC Volts	Hertz	Watts	CFM @ 0"	dBA	Temp. Max °C	Wgt. (oz)	Features	Approvals* UL	CSA	VDE
1	**4840N****	Sleeve	115	50/60	10	50	26	80	19	Terminals	√	√	√
1	**4890N****	Sleeve	230	50/60	10	50	26	80	19	Terminals	√	√	√
2	**4600N**	Sleeve	115	50/60	18	106	50	60	19	Terminals	√	√	√
2	**4600X**	Sleeve	115	50/60	18	106	50	60	19	Terminals	√	√	√
2	**4600XP**	Sleeve	115	50/60	18	106	50	60	19	Terminals	√	√	√
2	**4650N**	Sleeve	230	50/60	18	106	50	60	19	Terminals	√	√	√
2	**4650X**	Sleeve	230	50/60	18	106	50	60	19	Terminals	√	√	√
2	**4606N**	Ball	115	50/60	18	106	51	90	19	Terminals	√	√	√
2	**4606X**	Ball	115	50/60	18	106	51	90	19	Terminals	√	√	√
2	**4656N**	Ball	230	50/60	18	106	51	90	19	Terminals	√	√	√
2	**4656X**	Ball	230	50/60	18	106	51	90	19	Terminals	√	√	√
2	**4660N**	Sleeve	115/230	50/60	18	106	51	60	19	22 AWG 12.2" Leads	√	√	√
2	**4624N**	Sleeve	24	50/60	18	106	50	60	19	Terminals	√	√	√

** 4840N and 4890N have air flow of air exhaust over struts.

NOTE: 4600XP has a 5 year warranty

* UL yellow card E38324, CSA file 27697, VDE file 6617 (4600), 4621 (4650, 4850), 9989 (4606/08)

CONSTRUCTION MOUNTING & CONNECTION	**Mounting:**	Either face using four .169" (4.3mm) holes (N versions) .146" (3.7mm) holes (X versions)	**Weight:**	19 ounces (550g)
			Housing:	Metal with metal impeller
			Connection:	Terminals, .118" x .02" (3.0 x .5mm)

Call **ebm/Papst** at 860-674-1515 • Fax 860-674-8536 • E-mail: sales@ebm.com for Technical Assistance

© ebm/Papst 1995, 1996, 1997. ebm/Papst reserves the right to change any specifications or data without notice.