Brand of NTN corporation

Technical data

UKP216H

Bearing units




Grey cast housing, radial insert ball bearing with adapter sleeve,seal with slinger

KIT CONTENT

UK216G2H, P216

VISUAL (S)

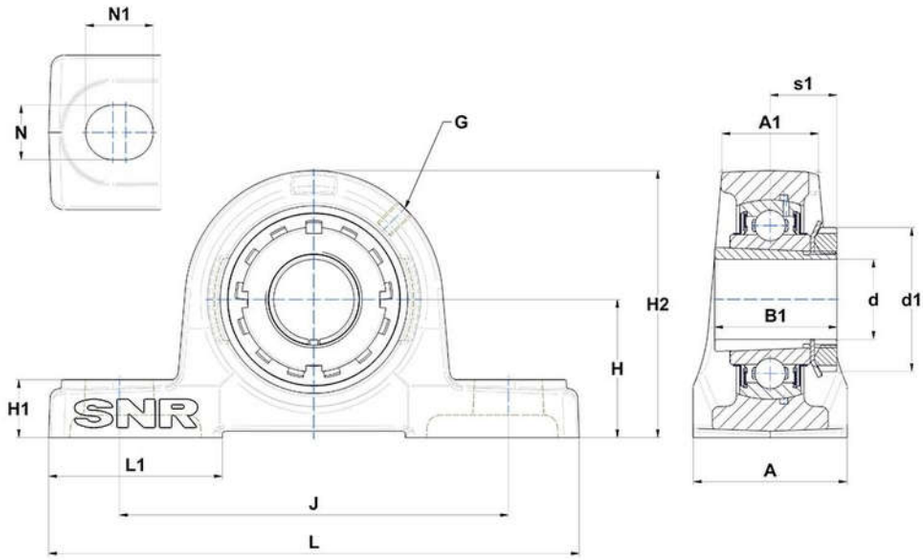

PRODUCT DEFINITION

Brand	SNR
A - Housing width	78 mm
A1 - Housing top width	51 mm
B - Width of Inner Ring	44 mm
d - Shaft diameter	70 mm
d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	105 mm

PRODUCT DEFINITION	
G - Grease fitting	M10x1
H - Distance mounting base to centerline spheric. seating diam.	88,9 mm
H1 - Housing foot height	30 mm
H2 - Housing height	175 mm
J - Mounting holes distance	232 mm
L - Housing length	292 mm
L1 - Housing foot length	91 mm
N - Mounting hole dimension	25 mm
N1 - Mounting hole length	31 mm
s1 - Distance nut to middle of bearing raceway	39 mm

PRODUCT PERFORMANCE	
C - Dynamic load rating	72500000 mN
C0 - Static load rating	54200000 mN
Operating temperature min.	253,15 °K
Operating temperature max.	373,15 °K

OTHER FEATURES	
Mass	9,41 kg
Adapter sleeve designation	H2316