

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 7225: CHG'D SR FROM TPU TO LSZH, ROHS NOTE	1/8/14	D.FRISIELLO
F	ECN 10804: UPT CABLE; ADD CABLE OD, FLAME RATING, TEMP. RANGE&LSZH IEC STANDARDS	11/23/2020	MMARTINEZ

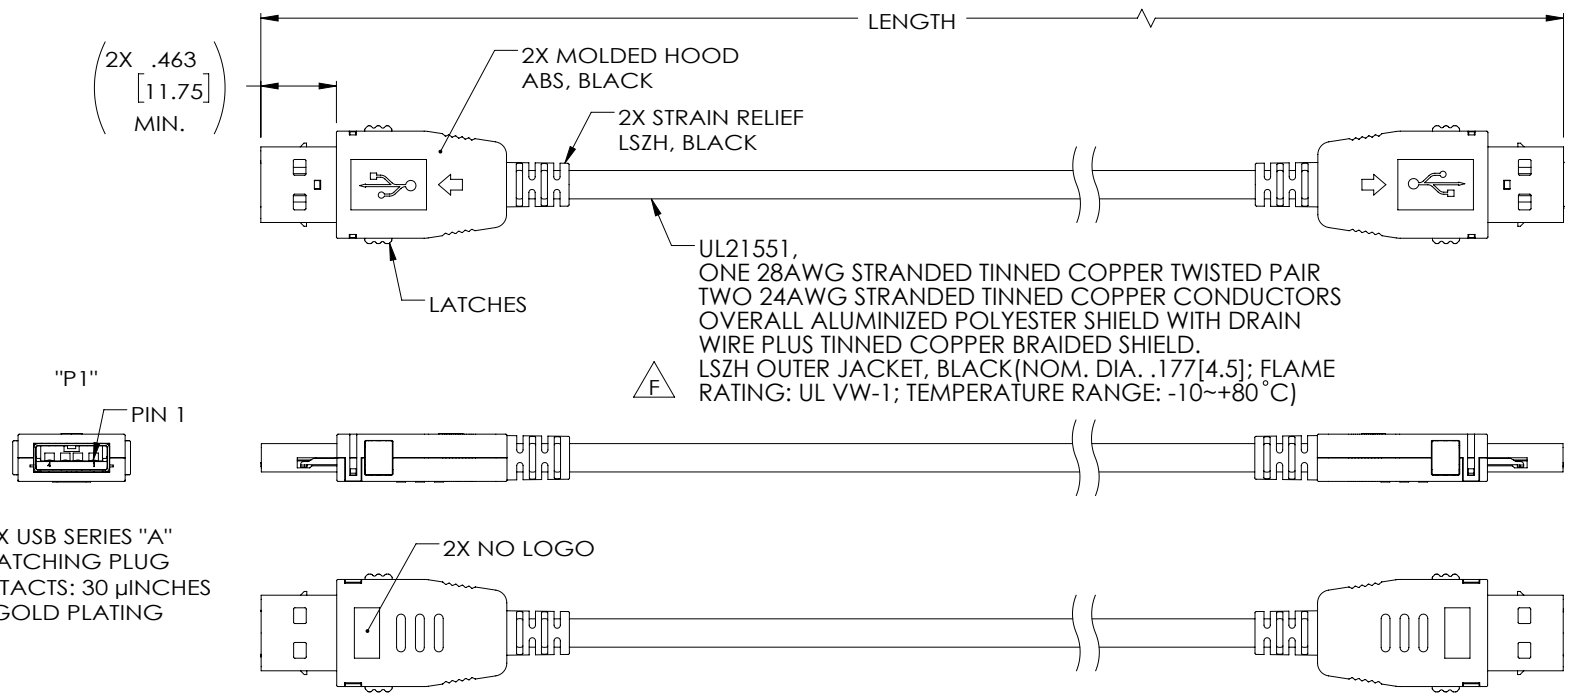

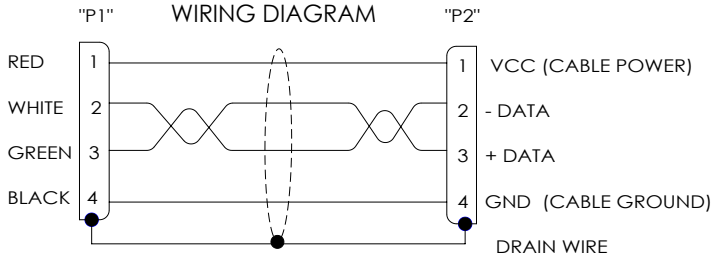

MODEL NUMBER	LENGTH METERS [FEET]
CAUZALAL-03M	0.3 [.98]
CAUZALAL-05M	0.5 [1.64]
CAUZALAL-075M	0.75 [2.46]
CAUZALAL-1M	1.0 [3.28]
CAUZALAL-2M	2.0 [6.56]
CAUZALAL-3M	3.0 [9.84]
CAUZALAL-4M	4.0 [13.12]
CAUZALAL-5M	5.0 [16.40]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

LSZH CABLE CHARACTERISTICS:
FLAME RATING: IEC 60332-1
CORROSIVE GAS: IEC 60754
SMOKE EMISSION: IEC 61034

F

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5] | FRACTIONS ± 1/32
.XX = ± .02 [.5] | ANGLES ± 1°
.XXX = ± .005 [.13]
THIRD-ANGLE PROJECTION

APPROVALS	DATE
DRAWN BY D. CASTRO	11/3/10
CHECKED BY D. PARHAM	12/9/10
APPROVED BY S. SMITH	12/9/10

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM an INFINITE brand
50 High Street, West Mill,
North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

CATEGORY
USB

PRODUCT DESCRIPTION
CA,USB A/A LSZH LATCH BLK

SIZE	CAGE CODE	DWG. NO.	REV.
A	43321	CAUZALAL	F

SCALE: NONE | CAD FILE: CAUZALAL.SLDDRW | SHEET 1 OF 1

T-Rev.D