

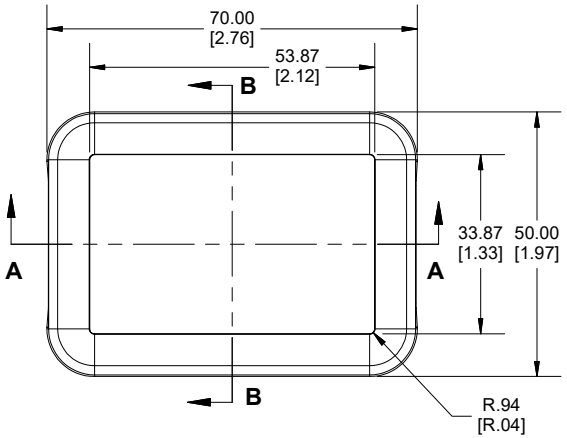



TOP VIEW

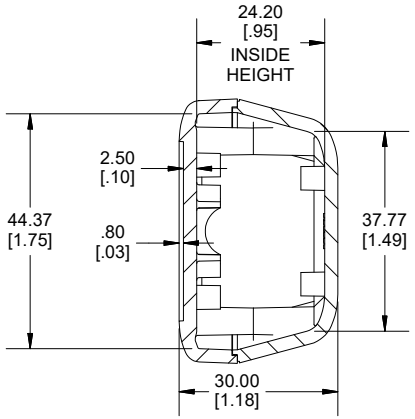


SECTION B-B
END VIEW

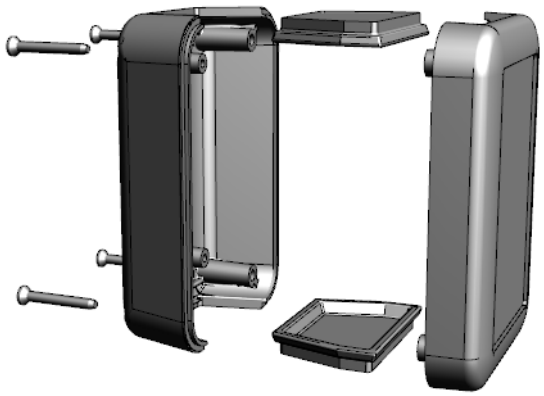

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory (modshop@hammfg.com) for quotes
Solid models of this enclosure available in .stp or .x_t
(Part number and text placement/orientation on our products are subject to change, we do not recommend using them as a locating reference for modification purposes)

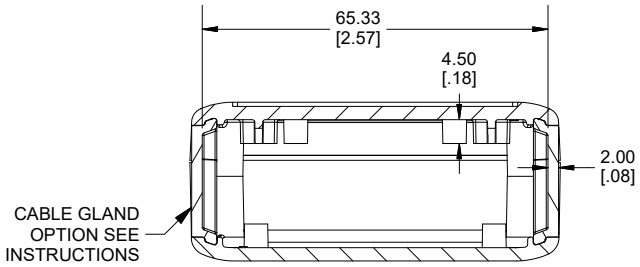


SECTION A-A
SIDE VIEW

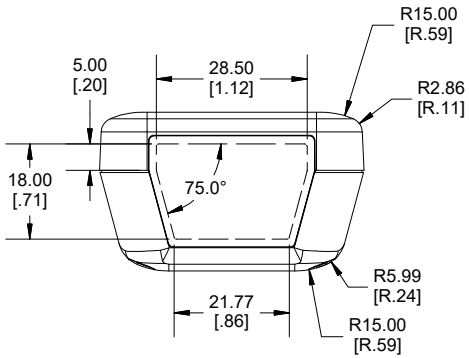


USEABLE PANEL AREA

NOTE
Purchased assembly includes box, lid, 2 Panels and 4 cover screws Molded from FR ABS (UL94-V0) plastic
Recommended Cover screw torque -- 21-28 ozf-in (15-20 cN-m)

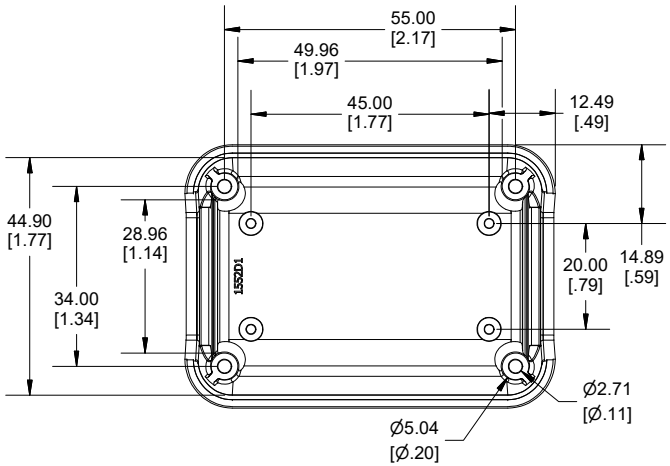

INSIDE BOTTOM

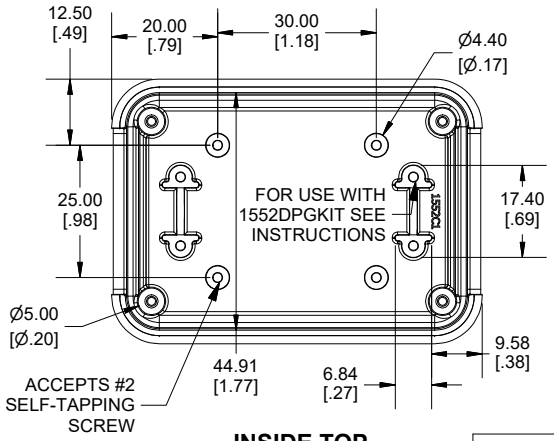

INSIDE TOP
MAXIMUM PCB LAYOUT
DRAWINGS ARE AVAILABLE

1552	
1552D Regular Enclosure	
Fire Retardant ABS Grey	1552D1GY
Fire Retardant ABS Black	1552D1BK
ACCESSORIES	
1552D End Panel (Pkg 10)	1552DPLGY-10 (Grey)
	1552DPLBK-10 (Black)
1552D cover screw [#2 X 3/4" Self-Tap] (Pkg 50)	SC551-50 (Grey)
	SC551BK-50 (Black)
1552D Cable gland Kit [1 Cable Gland, 1 Tie Down, 2 Tie down screws]	1552DPGKITGY (Grey)
	1552DPGKITBK (Black)
1552 Wall Mount Holder	1552DHGY (Grey)
	1552DHBK (Black)
Tie Down Screw [#2 X 1/4" Self-Tap] (Pkg 50)	SC508-50
P.C. Board Plastite Self Tapping Screw [#2 x 3/16" Self-Tap] (PKG 100)	1553WTS100

Dimensions:
mm
[inches]

HAMMOND MANUFACTURING®

1552D1

www.hammondmfg.com

REV: 15.10.2019