
U.306 - Outside pullers



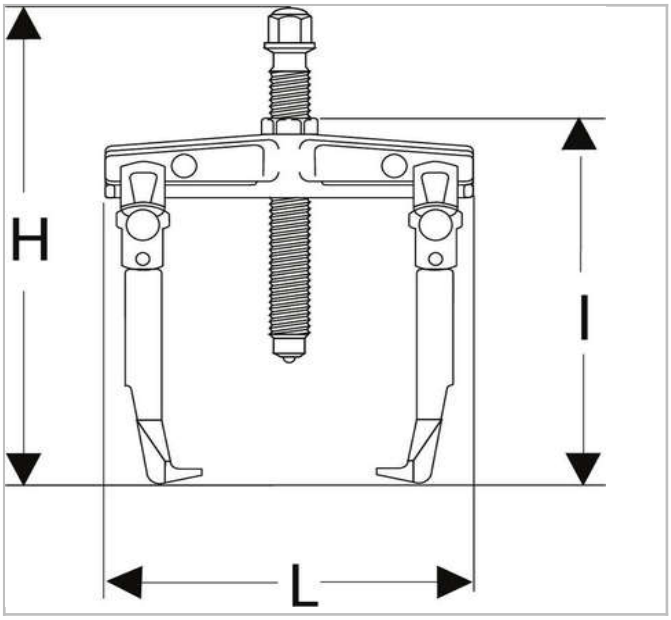

Description:

● Versatile: takes 2 or 3 legs. Converts into inside puller with the legs U.306G2 + screw U.306-4 or legs U.306G20 + screw U.306-2.
● Comfort: self-gripping legs by return spring. The puller stays in rolling position even when not in tension.
● Safety: legs locked in position on the bearing using a knob. No risk for the puller to escape from the bearing.
● Shear pin: the pin shears if torque limit is exceeded. Supplied with 2 spare pins.
● Set of 3 spare pins. Refer to spares table according to puller power.
● Adaptable puller accessories: slide hammer U.306M (direct attachment) and beam U.40 (attached using ring and nut U.306A1 to be ordered separately).
● The U.306-260 puller is supplied with the U.306-3 screw fitted with its extension.

© FACOM 2020

	Depth Maxi [mm]	Length L [mm]	Height H [mm]	C Mini - Maxi [mm]	Length [mm]	Hex Size [mm]	Screw Size ["]	t ["]	Weight [Kg]	Legs_Multi ["]	Screw Size Multi ["]	Tonnes ["]
U.306-260	250.0	145.0	385.0	20 - 260	350.0	18.0	U.306-3	40.0	3.1	U.306G15	18.0	4.0
U.306A140	147.0	130.0	262.0	7 - 140	225.0	18.0	U.306-4	30.0	1.6	U.306G1	18.0	3.0

© FACOM 2020