
HIRSCHMANN
Test & Measurement

Sockets

PB 4

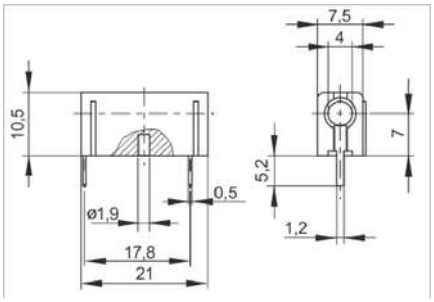

CE

Product	PB 4
description	4 mm diameter test socket for measuring and testing printed boards during operation. The test socket may also be mounted on the printed board using a BZ 2.2 DIN7971 pan-head, self-tapping screw. Tin-plated brass through-hole 4 mm diameter socket.
operating instruction	BA406
article-no. / *colour	9735821xx 00 black 01 red
drawing	
	
technical data	
connection	solder connection
rated voltage	30 VAC / 60 VDC
rated current (consider derating curve)	16 A
material socket	brass, tin plated
housing material	PC
temperature range acc. To IEC61010[(1)]	-25 °C to +85 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB

[(1)]contact the manufacturer for applications at deviating temperature ranges
stand : November 13, 2025 6:00 PM

4 mm system