Data sheet

Electronic overload relay EF65, EF96 and EF146

Electronic overload relays are the alternative to the thermal overload relays. An electronic overload relay offers reliable and fast protection for motors in the event of overload or phase failure. Starter combinations are setup together with contactors.



Description

- Overload protection – trip class 10E, 20E, 30E selectable
- Phase loss sensitivity
- Temperature compensation from -25 … +70 °C
- Adjustable current setting for overload protection
- Automatic or manual reset selectable
- Trip-free mechanism
- Status indication
- STOP and TEST function
- Direct mounting onto block contactors
- Sealable operating elements
- Self-supplied devices

Order data


EF65, EF96, EF146 screw terminal
For AF40 … AF146 block contactors



Setting range A	Type	Order code	Suitable for	Packing unit PCE	Weight per PCE kg
25 ... 70	EF65-70	1SAX331001R1101	AF40, AF52, AF65	1	0.790
36 ... 100	EF96-100	1SAX341001R1101	AF80, AF96	1	0.780
54 ... 150	EF146-150	1SAX351001R1101	AF116, AF140, AF146	1	0.890

Suitable for mounting on:
AF40, AF52, AF65
AF80, AF96
AF116, AF140, AF146

Functional description

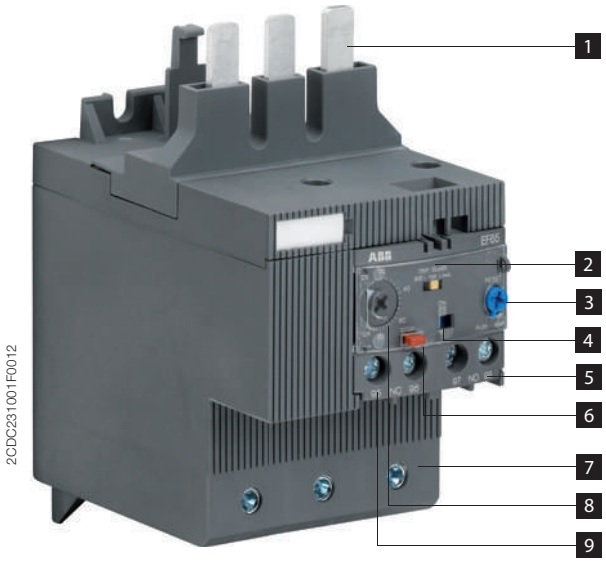

1 **Terminals (1L1, 3L2, 5L3)**

2 **Trip class 10E, 20E, 30E selectable**

3 **RESET button**
Automatic or manual reset selectable

4 **Status indication**

5 **Signaling contacts 97-98**

6 **STOP button**

7 **Terminals 2T1, 4T2, 6T3**

8 **Current setting range**
Adjustable current setting for overload protection


9 **Tripping contacts 95-96**

Application / internal function

The self-supplied electronic overload relays are three pole electronic/mechanical devices. The motor current flows through build-in current transformers and an evaluation circuit will recognize an overload (over current). This will lead to a release of the relay and a change of the contacts switching position (95-96 / 97-98). The contact 95-96 is used to control the load contactor. The electronic overload relay is self-supplied, which mean no extra external supply is needed.


The overload relays have a setting scale in Amperes, which allows the direct adjusting of the relay without any additional calculation. In compliance with international and national standards, the setting current is the rated current of the motor and not the tripping current (no tripping at 1.05 x I, tripping at 1.2 x I; I = setting current). The relays are constructed in a way that they protect themselves in the event of an overload. The overload relay has to be protected against short-circuit. The appropriate short-circuit protective devices are shown in the table.

Operation mode

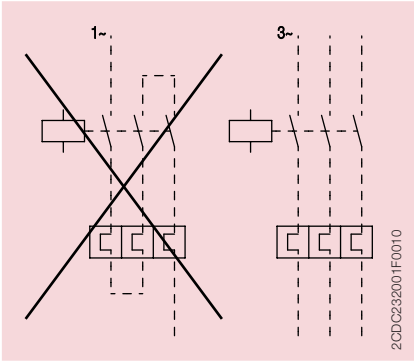

	Contact 95-96	Contact 97-98	Opto-mechanical slide	Comment
Trip state	open	closed		
RESET state	closed	open	ON	
TEST manual reset mode	open	closed		
TEST auto reset mode	open	closed		
STOP while device is in trip state	open	closed		STOP button has no function
STOP while device is in RESET state	open	open		while STOP button is pressed


Wiring diagram

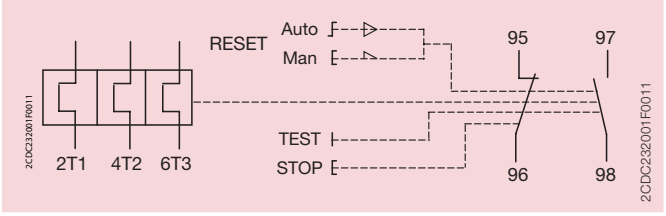


Resistance and power loss per pole and short-circuit protective devices

Type	Setting range		Resistance per pole	Power loss		Short-circuit protective devices
	lower value A	upper value A	mΩ	at lower value W	at upper value W	coordination type 2
EF65-70	25	70	0.09	0.06	0.45	Fuse 160 A, Type gG
EF96-100	36	100	0.09	0.12	0.90	Fuse 200 A, Type gG
EF146-150	54	150	0.07	0.21	1.58	Fuse 315 A, Type gG


Intermittent periodic duty

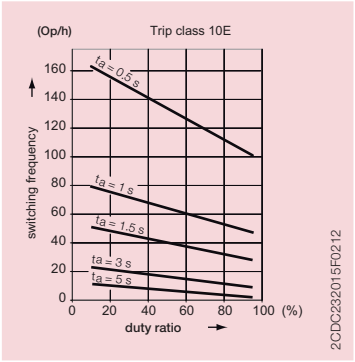

Trip class 10E

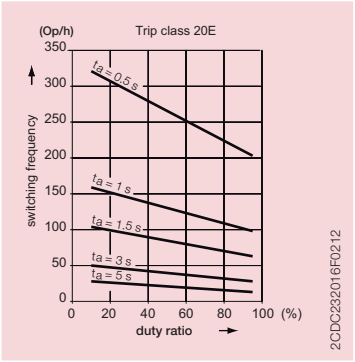


Trip class 20E

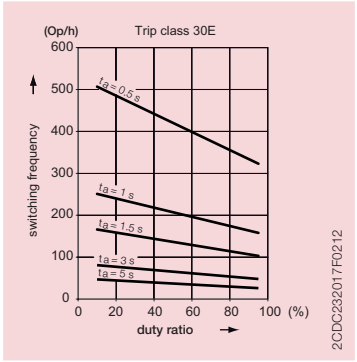


Trip class 30E


Dimensions

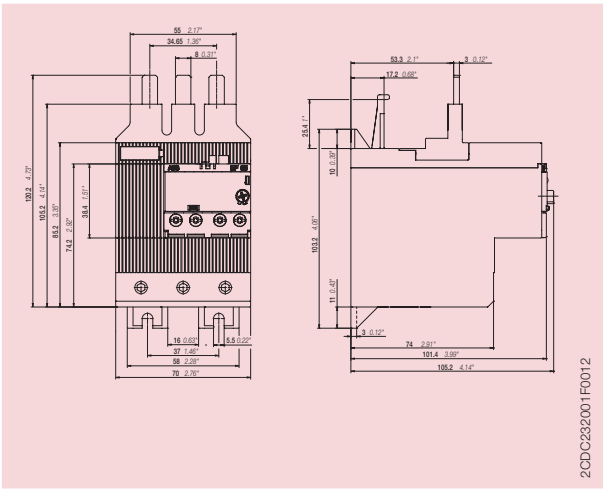

EF65-70

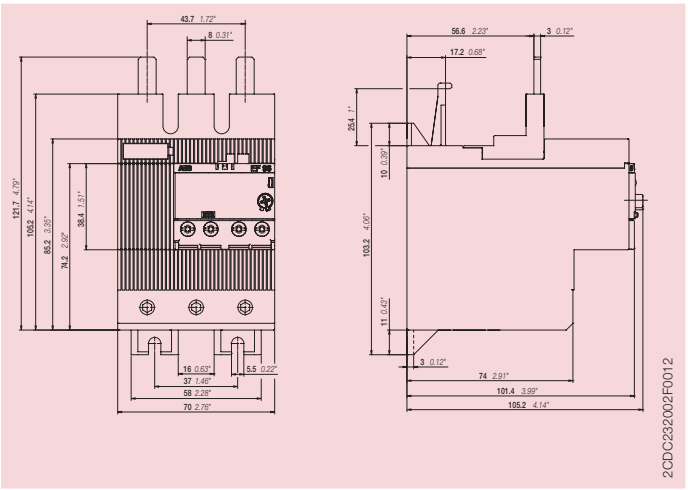

EF96-100

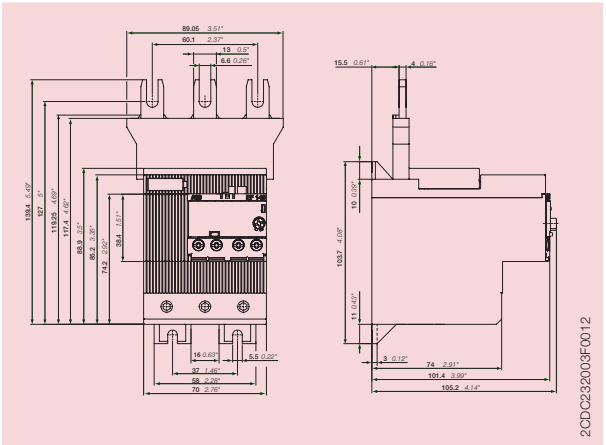

EF146-150

Technical data IEC/EN

Data at T_A = 40 °C and at rated values, if nothing else indicated

Main circuit

	EF65, EF96, EF146
Rated operational voltage U_e	1000 V AC
	- V DC
Setting range - electronic overload protection	see table on page 1
Rated operational current AC-3 I_e	see upper value of setting range, table on page 3
Trip class	10E, 20E, 30E, selectable
Rated frequency	50/60 Hz
Number of poles	3
Resistance per pole	see table on page 3
Power loss per pole	see table on page 3
Short-circuit protective devices	see table on page 3

Isolation data	EF65, EF96, EF146
Rated impulse withstand voltage U_{imp}	8 kV
Rated insulation voltage U_i	1000 V
Pollution degree	3
Overvoltage category	up to III

Electrical connection			EF65	EF96	EF146
Connecting capacity	rigid	1x	4 ... 35 mm²	6 ... 70 mm²	10 ... 95 mm²
		2x	4 ... 35 mm²	6 ... 35 mm²	10 ... 35 mm²
	flexible with ferrule	1x	4 ... 35 mm²	6 ... 50 mm²	10 ... 70 mm²
		2x	4 ... 35 mm²	6 ... 35 mm²	10 ... 35 mm²
	flexible with ferrule insulated	1x	4 ... 35 mm²	6 ... 50 mm²	10 ... 70 mm²
		2x	4 ... 35 mm²	6 ... 35 mm²	10 ... 35 mm²
	flexible	1x	4 ... 35 mm²	6 ... 70 mm²	10 ... 70 mm²
		2x	4 ... 35 mm²	6 ... 35 mm²	10 ... 35 mm²
Stripping length			20 mm	20 mm	20 mm
Tightening torque			4 Nm	6 Nm	8 Nm
Connection screw			M8 (Pozidriv 2)	M8 (Hexagon 4)	M8 (Hexagon 4)

Auxiliary circuit

		95-96, 97-98
Rated operational voltage U_e		600 V AC / DC
Conventional free air thermal current I_{th}		6 A
Rated frequency		DC, 50/60 Hz
Number of poles		1NC + 1NO
Rated operational current I_e		
acc. to IEC/EN 60947-5-1 for utilization category		
at AC-15 at 110-120 V	NC, 95-96	3.00 A
	NO, 97-98	3.00 A
at AC-15 at 220-230-240 V	NC, 95-96	3.00 A
	NO, 97-98	3.00 A
at AC-15 at 400 V	NC, 95-96	1.10 A
	NO, 97-98	1.10 A
at AC-15 at 480-500 V	NC, 95-96	0.75 A
	NO, 97-98	0.75 A
at DC-13 at 24 V	NC, 95-96	1.50 A
	NO, 97-98	1.50 A
at DC-13 at 60 V	NC, 95-96	0.55 A
	NO, 97-98	0.55 A
at DC-13 at 110-120-125 V	NC, 95-96	0.55 A
	NO, 97-98	0.55 A
at DC-13 at 250 V	NC, 95-96	0.27 A
	NO, 97-98	0.27 A
Minimum switching capacity		12 V / 3 mA
		$\lambda = 10^{-7}$; U_{kq} = 3 V / 500.000 operating cycles
Short-circuit protective devices		fuse 6 A, Type gG

Isolation data	95-96, 97-98
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V
Pollution degree	3
Overvoltage category	up to III

Electrical connection			95-96, 97-98
Connecting capacity	rigid	1x	1 ... 4 mm²
		2x	1 ... 4 mm²
	flexible with ferrule	1x	0.75 ... 2.5 mm²
		2x	0.75 ... 2.5 mm²
	flexible with ferrule insulated	1x	0.75 ... 2.5 mm²
		2x	0.75 ... 2.5 mm²
	flexible	1x	0.75 ... 2.5 mm²
		2x	0.75 ... 2.5 mm²
Stripping length			9 mm
Tightening torque			0.8 ... 1.2 Nm
Connection screw			M3.5 (Pozidriv 2)

General data

Duty time		100 %
Operating frequency without early tripping		up to 15 operations/h or 60 operations/h with 40 % duty ratio, if the motor breaking current 6 x I_n and the motor starting time does not exceed 1 s
Dimensions (W x H x D)		see dimension drawing
Weight		see ordering data
Mounting		mount on the contactor and tighten the screws of the main circuit terminals
Mounting position		optional, position 1-6
Minimum distance to other units same type	horizontal	none
	vertical	not applicable
Minimum distance to electrical conductive board	horizontal	1.5 mm
	vertical	1.5 mm
Degree of protection	housing	IP20
	main circuit terminals	IP10
Altitude		up to 2000 m

Electromagnetic compatibility

Immunity acc. to IEC 60947-1	Environment A
Emission acc. to IEC 60947-1	Environment B

Environmental data

Ambient air temperature		
Operation	open - compensated	-25 ... +70 °C
	open	-25 ... +70 °C
Storage		-50 ... +85 °C
Ambient air temperature compensation		acc. to IEC/EN 60947-4-1
Vibration (sinusoidal) acc. to IEC/EN 60068-2-6 (Fc)		5g / 3 ... 150 Hz
Shock (half-sine) acc. to IEC/EN 60068-2-27 (Ea)		15g / 11 ms

Standards / directives

Product standard	IEC/EN 60947–4–1 IEC/EN 60497-5-1 IEC/EN 60947-1 UL 508, CSA22.2 No. 14
Low Voltage Directive	2006/95/EC
EMC Directive	2004/108/EC
RoHS Directive	2002/95/EC

Technical data UL/CSA

Full load amps and short-circuit protective devices

Type	Full load amps (FLA)	Short-circuit protective devices 480 V AC SCCR	Fuse type	600 V AC SCCR	Fuse type	600 V AC SCCR	Fuse type
EF65-70	70 A	10 kA	150 A, K5/RK5	10 kA	150 A, K5/RK5	100 kA	175 A, Class J
EF96-100	100 A	10 kA	200 A, K5/RK5	10 kA	200 A, K5/RK5	100 kA	225 A, Class J
EF146-150	150 A	10 kA	250 A, K5/RK5	10 kA	250 A, K5/RK5	100 kA	350 A, Class J

Main circuit

Maximum operational voltage	600 V AC
Trip rating	125 % of FLA
Full load amps (FLA)	see table above
Short-circuit rating RMS symmetrical	see table above
Short-circuit protective devices	see table above

Electrical connection			EF96	EF146
Connecting capacity	stranded	1x	AWG 8 ... 2	AWG 6 ... 0
		2x	AWG 8 ... 2	AWG 6 ... 2
	flexible	1x	AWG 8 ... 2	AWG 6 ... 0
		2x	AWG 8 ... 2	AWG 6 ... 2
Stripping length			20 mm	20 mm
Tightening torque			70 lb.in	70 lb.in
Connection screw			M8 (Hexagon 4)	M8 (Hexagon 4)

Auxiliary circuit

Conventional thermal current		6 A
Making and breaking capacity	NC / NO	B600, Q600

Electrical connection			EF65	EF96	EF146
Connecting capacity	stranded	1x	AWG 18 ... 10	AWG 18 ... 10	AWG 18 ... 10
		2x	AWG 18 ... 10	AWG 18 ... 10	AWG 18 ... 10
	flexible	1x	AWG 18 ... 10	AWG 18 ... 10	AWG 18 ... 10
		2x	AWG 18 ... 10	AWG 18 ... 10	AWG 18 ... 10
Stripping length			9 mm	9 mm	9 mm
Tightening torque			7 ... 11 lb.in	7 ... 11 lb.in	7 ... 11 lb.in
Connection screw			M8 (Pozidriv 2)	M8 (Pozidriv 2)	M8 (Pozidriv 2)

Contact us

ABB STOTZ-KONTAKT GmbH
Eppelheimer Straße 82
69123 Heidelberg, Germany
Phone: +49 (0) 6221 7 01-0
Fax: +49 (0) 6221 7 01-13 25
E-Mail: info.desto@de.abb.com

You can find the address of your local sales organization on the ABB home page
http://www.abb.com/contacts
-> Low Voltage Products and Systems

Note:
We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.

Copyright© 2013 ABB
All rights reserved

Document number 2CDC 107 041 D0201 (02.2013)

Power and productivity
for a better world™