MURR ELEKTRONIK
stay connected

M12 MALE 0° B CODED SHIELDED WIREABLE SCREW TERM.

2 POLE max. 0.75mm² 6-8mm PROFIBUS

Link to Product

Illustration



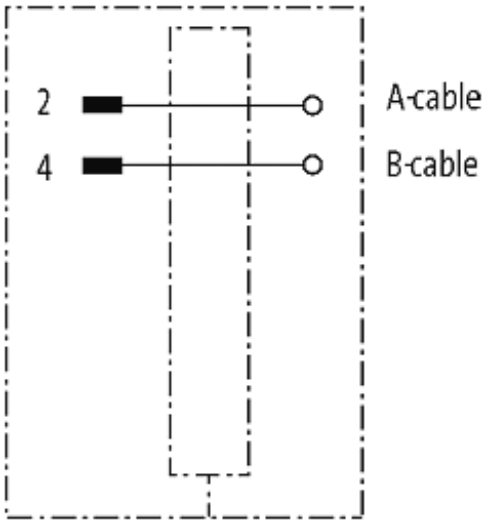

Product may differ from Image

Technical Data	
Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm²
Sealing range (cable Ø)	6...8 mm
Housing	Brass, nickel plated
Protection	IP67 inserted and tightened (EN 60529)
General data	
Temperature range	-25...+85 °C
Commercial data	
country of origin	DE
customs tariff number	85369010

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

stay connected

EAN	4048879198646
eClass	27279218
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com