HIRSCHMANN® Test & Measurement
A BRAND OF SKS

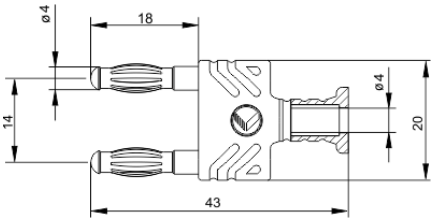
SKS Kontakttechnik GmbH

## Plugs

# KST WS 14/4



CE

| Product | KST WS 14/4 |
|---|---|
| description | Jumper plug with spring-loaded 4 mm plugs and one 4 mm unsprung socket for connection with all 4 mm spring-loaded plugs that are not contact-protected. Shatter-proof insulation. |
| operating instruction | BA416 |
| article-no. / *colour | 9722651xx<br>00<br>black<br>Ni |
| **drawing** | |
| |  |
| **technical data** | |
| rated voltage | 30 VAC / 60 VDC |
| measurement cat. acc. to IEC 61010 | O (2) |
| rated current (consider derating curve) | 32 A |
| material plug | brass, nickel plated |
| housing material | PBT |
| temperature range acc. To IEC61010(1) | -15 °C to 70 °C |
| inflammability class acc. to UL 94 (only valid for basic material of housing) | HB |

(1) contact the manufacturer for applications at deviating temperature ranges
(2) without rated measurement category, for other circuits that are not directly connected to mains
stand: 21.06.2022

stand: 21.06.2022

4 mm system