



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	03/04/02	MCCORMICK
B	ECN# 2731 - ADDED ROHS STAMP	10/23/07	D.GRIFFIN
C	ECN 10726: UPDATE MODEL , DIM'S AND NOTES	10/16/2020	BGATES
D	ECN 11011: CORRECTED GROMMENT INNER DIAMETERS	03/10/2021	BGATES

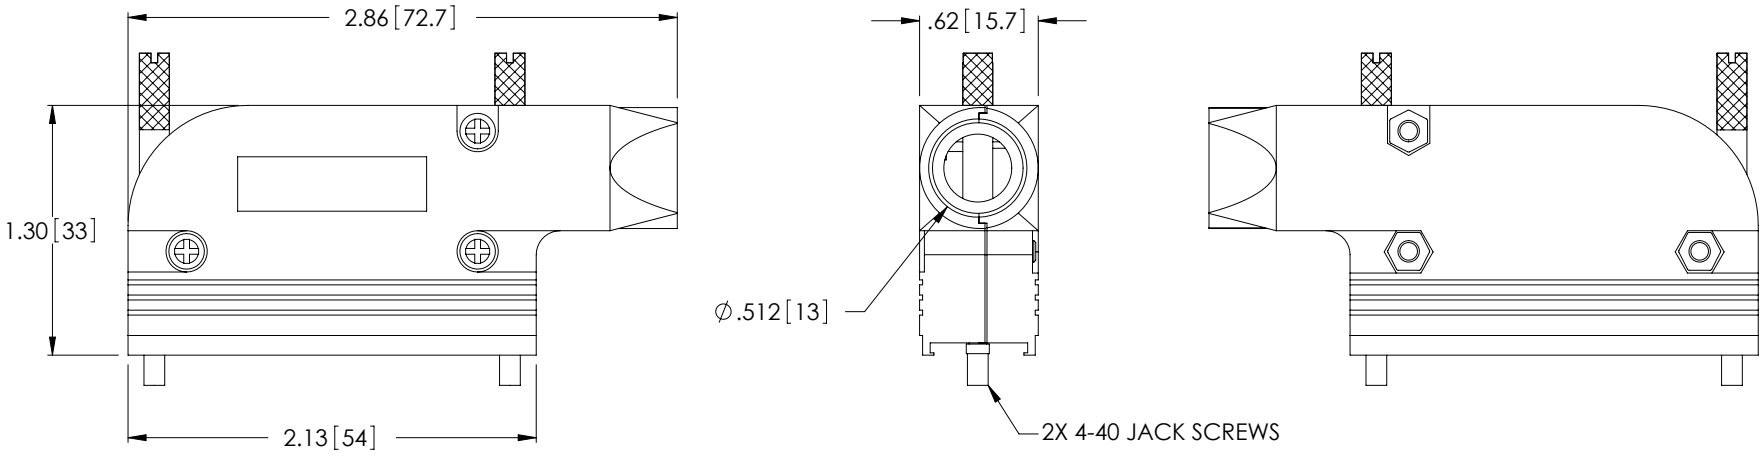



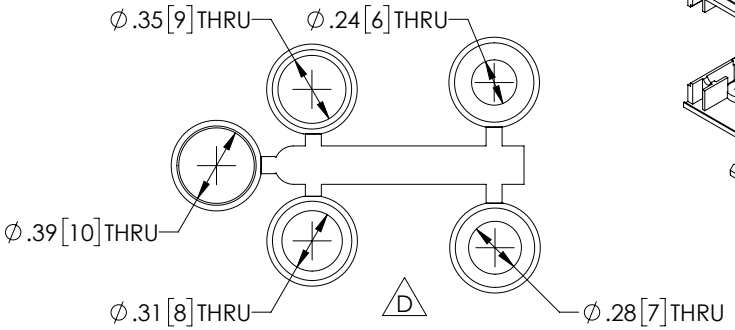

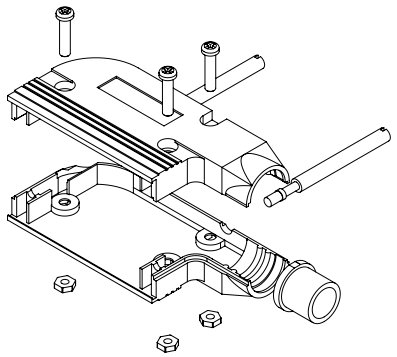

NOTES:

MATERIAL:
HOOD:DIE CAST ZINC ALLOY
JACKSCREWS: STEEL
ASSEMBLY HARDWARE: STEEL
STRAIN RELIEF GROMMETS: PVC (BLACK)

FINISH:
HOOD: NICKEL PLATED,MATTE FINISH ON MAJOR SURFACES
JACKSCREWS: NICKEL PLATED
ASSEMBLY SCREWS: NICKEL PLATED

MISCELLANEOUS:
INTENDED FOR USE WITH 25-PIN STANDARD AND 44-PIN HIGH DENSITY D-SUBMINIATURE CONNECTORS.
HOOD KIT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

GROMMETS AS SUPPLIED

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5] | FRACTIONS ± 1/32
.XX = ± .02 [.5] | ANGLES ± 1°
.XXX = ± .005 [.13]
THIRD-ANGLE PROJECTION

APPROVALS	DATE
DRAWN BY MCCORMICK	02/27/02
CHECKED BY D.PARHAM	02/27/02
APPROVED BY R.CARRICK	02/27/02

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR
REF

L-COM an INFINITE brand
50 High Street, West Mill,
North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

CATEGORY
D-SUBMINATURE

PRODUCT DESCRIPTION
HOOD KIT, METAL, RIGHT ANGLE

SIZE	CAGE CODE	DWG. NO.	REV.
A	43321	SDRA25AG	D

SCALE: NONE | CAD FILE: SDRA25AG.SLDDRW | SHEET 1 OF 1

T-Rev.D