Datasheet


Anti surge T HBC min fuse,500mA 5x20mm


ENGLISH

RS Stock number [537-1593]

Dimensions - mm

Drawing Not to Scale



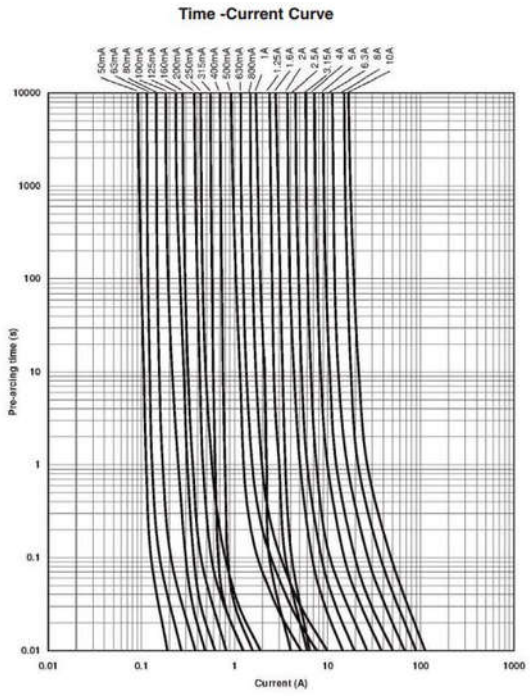

Description

- Fast-acting high breaking capacity
- Optional axial leads available
- 5x20mm physical size
- Ceramic tube with silver-plated (50A-400A) and nickel plated 500A-10A) end caps
- Designed to IEC 60127-2
- RoHS certified

Electrical Characteristics							
	1.5 I_n	2.1 I_n	2.75 I_n		4 I_n		10 I_n
I_n	min	max	min	max	min	max	max
50mA-4A	60 min	30 min	10 ms	2 sec	3 ms	300 ms	20 ms
5A-6.3A	60 min	30 min	10 ms	3 sec	3 ms	300 ms	20 ms
8A-10A	30 min	30 min	40 ms	20 sec	10 ms	1s	30 ms

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.