MURR ELEKTRONIK
stay connected

SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE

0...230V PG9

Form A (18 mm)
230 V AC/DC
without components
PG9

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20

MURR ELEKTRONIK
stay connected



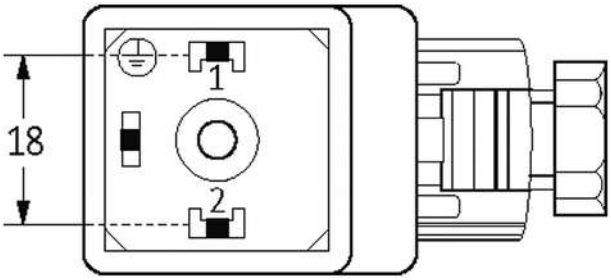

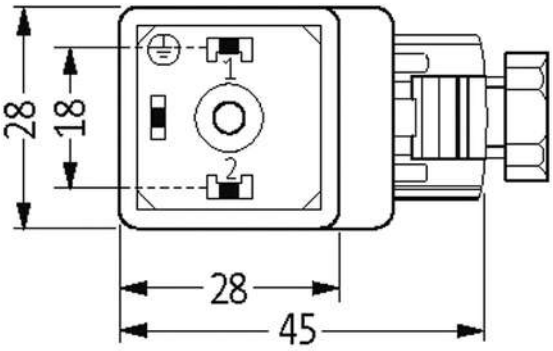

Height: 41 mm

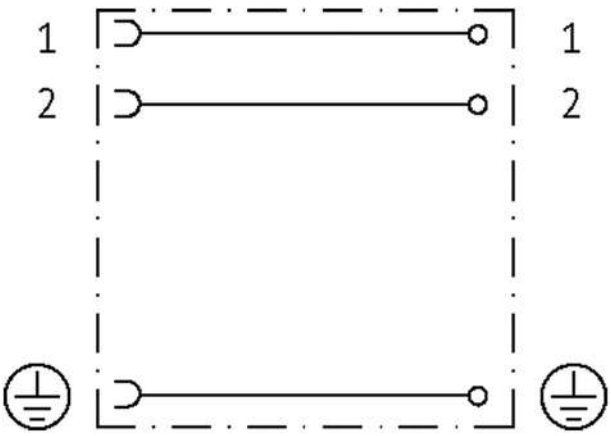

Product may differ from Image

Form

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20

Form	29261

Technical Data	
Operating voltage	max. 230 V AC/DC
Operating current per contact	max. 10 A
Configuration	2 contacts + PE
Locking of ports	M3 (recommended torque 0.4 Nm)
Protection	IP65 inserted and tightened (EN 60529)
General data	
Temperature range	-20...+60 °C
Commercial data	
country of origin	CZ
customs tariff number	85366990
EAN	4048879187510
eClass	27279221
Packaging unit	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20