MURR ELEKTRONIK
stay connected

Bus terminating plug M12 male A-cod.


CUBE67


Cube67
Terminating resistor
Male
M12, 6-pole
A-coded
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration



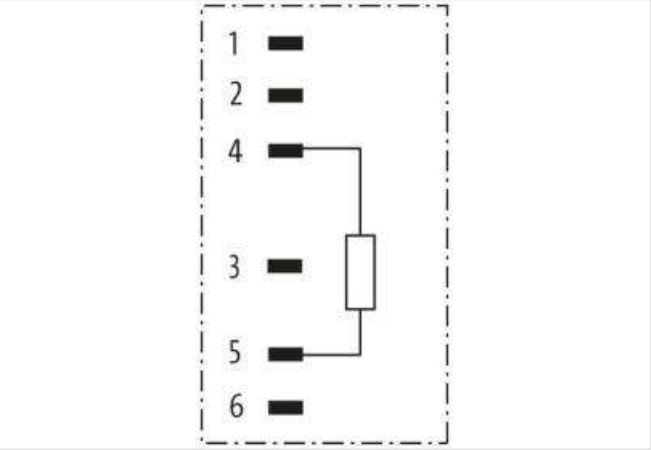

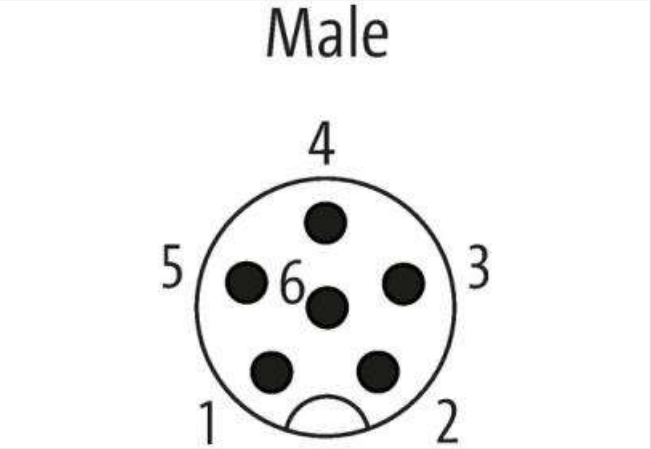

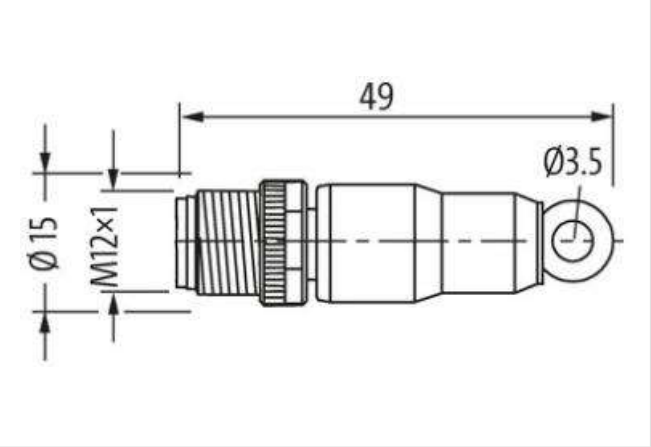

Product may differ from Image

c UL us LISTED

Form

Form	15041

Technical Data

Operating voltage	max. 30 V DC

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-03-17

Operating voltage (only UL listed)	max. 30 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
General data	
Temperature range	-25...+85 °C
Product article number of manufacturer	7000-15041-0000000

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-03-17