
# E73009


## Wall passage

**Wall passage stainless steel**

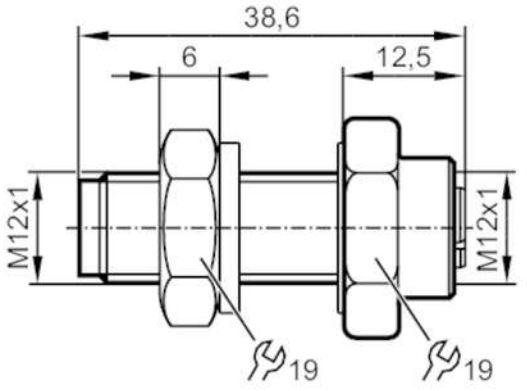


| | | |
|---|---|---|
| **Electrical data** | | |
| Operating voltage | [V] | < 60 AC/DC |
| Max. current load total | [A] | 8;  (pin 1+3: 4 A; pin 2+4: 4 A) |
| **Operating conditions** | | |
| Ambient temperature | [°C] | -40...85 |
| Protection | | IP 65; IP 67; IP 69K |
| **Mechanical data** | | |
| Weight | [g] | 29.5 |
| Materials | | stainless steel (303/1.4305); Sealing: EPDM |
| Moulded-body material | | stainless steel (303/1.4305) |
| Tightening torque | [Nm] | 1 |
| **Remarks** | | |
| Pack quantity | | 1 pcs. |
| **Electrical connection - plug** | | |

Connector: 1 x M12, straight; coding: A; Moulded body: stainless steel (303/1.4305)




# E73009

## Wall passage

**Wall passage stainless steel**

### Connection

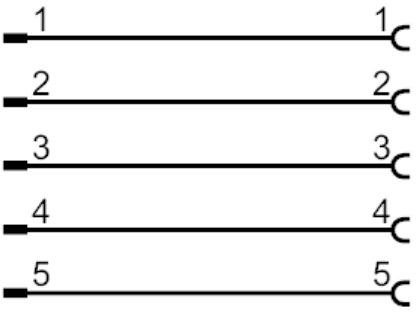


### Electrical connection - socket

Connector: 1 x M12, straight; coding: A; Moulded body: stainless steel (303/1.4305)

