


REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
B5	D	ECO-13168	09/10/2013	AKRESOWSKI	RCARLESCO

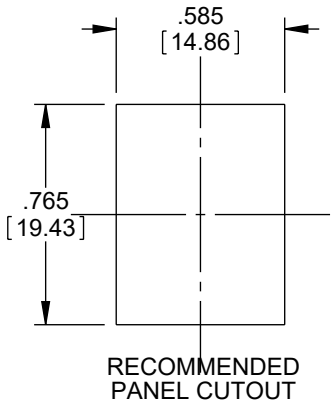


RECOMMENDED
PANEL CUTOUT

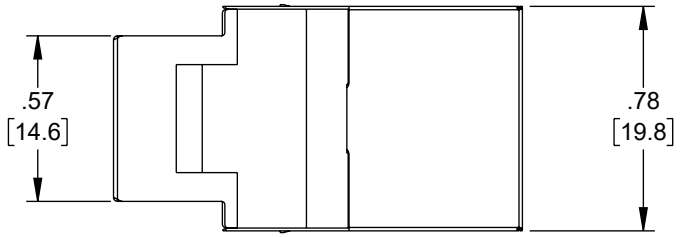



WIRING MAP

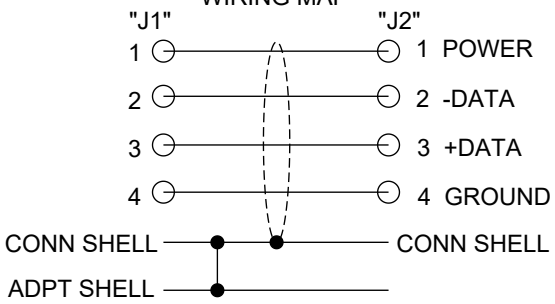

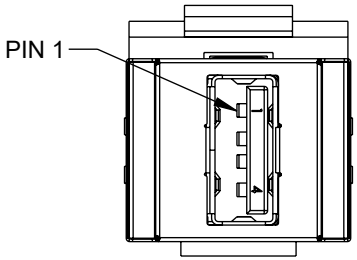

"J1"
2X USB TYPE A JACK
30 µINCH SELECTIVE GOLD PLATED CONTACT
NICKEL PLATED SHELL

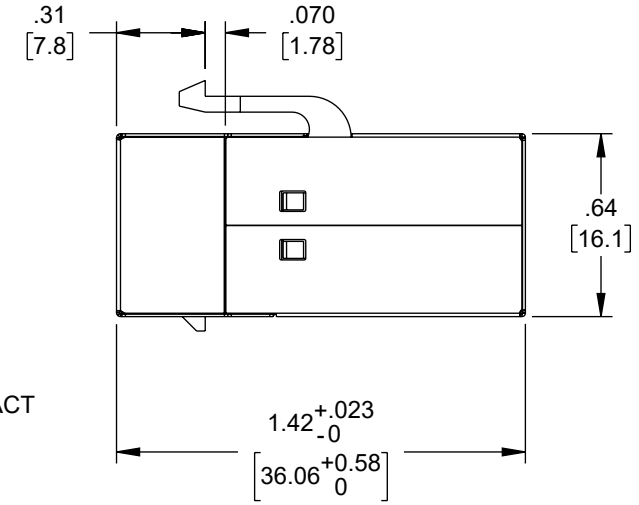

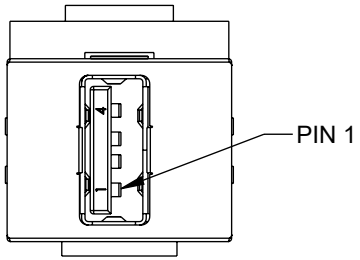

"J2"

NOTES:

1. ADAPTER HOUSING: ABS, UL94V-0 RATED
2. ADAPTER SHIELDING: STAINLESS STEEL
3. PCB: GLASS FIBER EPOXY; FR-4,UL94 V-0
4. USB CONNECTORS MEET USB2.0 STANDARD
5. OPERATING TEMPERATURE: -20°C~+60°C
6. ADAPTER SHALL BE TESTED FOR CONTINUITY.
7. ADAPTER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE: CE2011/65/EU (RoHS DIRECTIVE)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5] | FRACTIONS ± 1/32
.XX = ±.02 [0.5] | ANGLES ± 1°
.XXX = ±.005 [0.13]

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

L-com®
an INFINITE brand
Website: www.L-com.com
Phone: 1.800.341.5266 | 1.978.682.6936

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION: ADPT, USB KEYSTONE A-A

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	DFRISIELLO	UADKEY-AA	D

LC LG Rev-D4 Asize