HONEYWELL MILLER H500 ARC FLASH SERIES

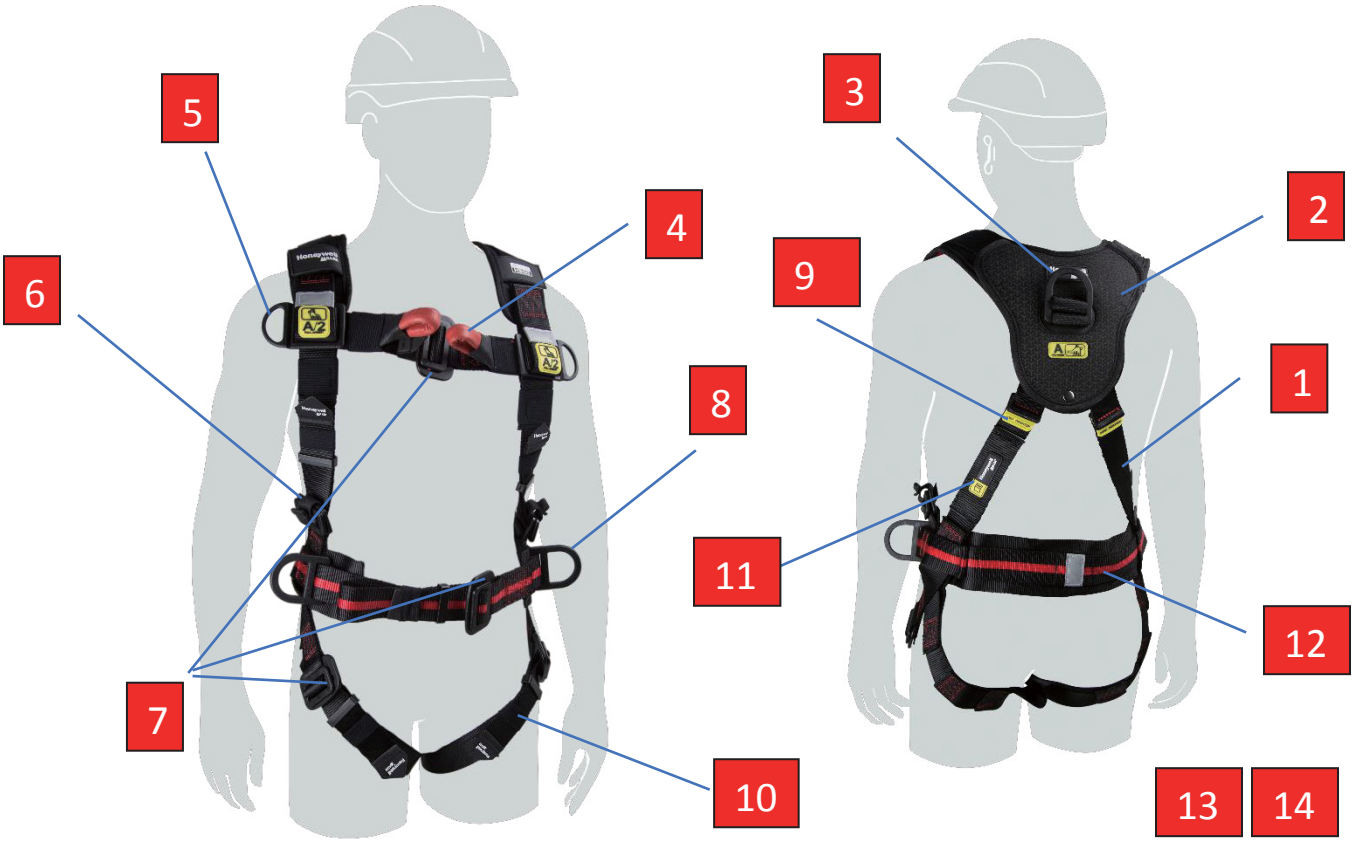

1	Polyamide webbing	**8**	Dielectric Side D rings
2	Removable shoulder padding	**9**	Visible load indicators
3	Dielectric Back D ring	**10**	Flame retardant elastic keepers
4	Polyamide Front webbing loops	**11**	Protected label pouch
5	Lanyard Keepers	**12**	Thick Waist Belt
6	Dielectric Shoulder Mating adjustment	**13**	Lightweight (size M = 2.6 kg)
7	Dielectric Mating Buckles	**14**	ASTM F887-20 (40 cal/cm²)

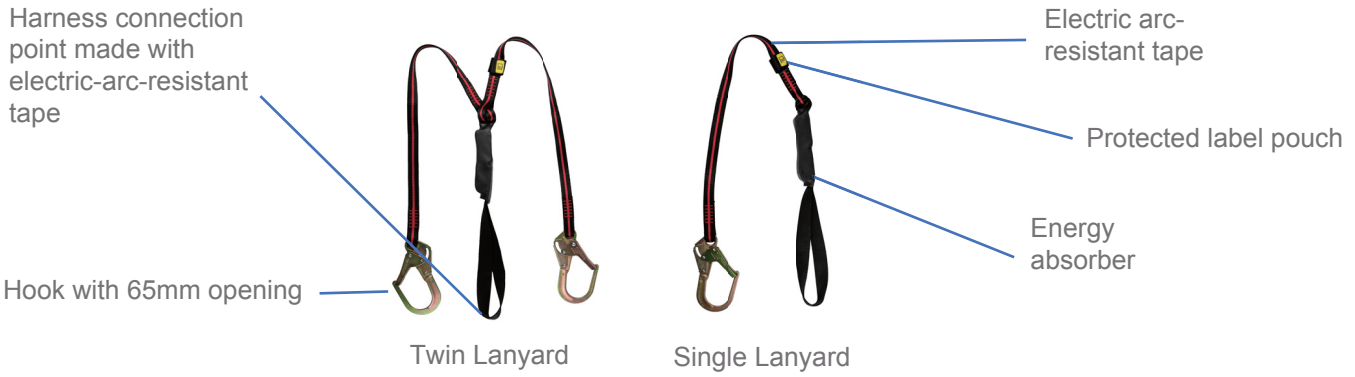

Honeywell

MILLER®

PRODUCT	SKU
Arc Flash Harness Size S	**FPXARCM-HSEU**
Arc Flash Harness Size M	**FPXARCM-HMEU**
Arc Flash Harness Size L	**FPXARCM-HLEU**
Arc Flash Lanyard - Single leg	**FPLARCM-SEU**
Arc Flash Lanyard - Twin legs	**FPLARCM-SEU**

ASTM F887 Test Requirements

- ✓ The webbing material must have a 7,000 lb (31kN) tensile strength (higher that typical safety harnesses).
- ✓ The harness is put through an Electrical Arc Performance test that requires the product to self-extinguish, not melt nor drip and maintain integrity after being subjected to an arc flash.
- ✓ The harness is put through a drop test using a 100 kg (220lb) test torso and must be able to meet the drop.

Check out the Miller H500 ASTM F887 video test results:
www.youtube.com **(not yet available)**

FEATURES

- Lightweight, ergonomic, breathable arc flash harness
- 100% dielectric hardware
- Easy to buckle up
- tested to ASTM F887-20 with an arc flash power of 40 cal/cm²
- Made from polyamide webbing, which provides greater durability and comfort
- Removable shoulder/back padding
- Max user weight : 140 kg

The new Honeywell Miller® H500 Arc Flash Series meets the following standards:

Harness: EN 361:2002, EN358:2018, ASTM F887-20

Lanyard: EN 355:2002, ASTM F887-20

Honeywell Safety Products

United Kingdom
Honeywell Safety Products Uk Ltd
Edison Rd
Basingstoke RG21 6QD
United Kingdom
Phone: +44 (0) 1256 693 200
Fax: +44 (0) 1256 693 300
Email: info-uk.hsp@honeywell.com

International
Honeywell Safety Products Europe SAS
Immeuble Edison Paris Nord 2
33, rue des Vanesses – CS 55288 Villepinte
95958 Roissy CDG Cedex – France
Phone: +33 (0)1 49 90 79 79
Fax: +33 (0)1 49 90 71 04
Email: info-export.hsp@honeywell.com

www.honeywellsafety.com

THE FUTURE IS WHAT WE MAKE IT

Honeywell