A2540060

ROUND KNOB 40, without line

Suitable for rotary potentiometer with round shaft ends according to DIN 41591. Collet system for convenient knob assembly from the front and simple adjustment (with adjustment key - sep. article). Continuous center hole.
Max. torque: assembly = 2,5 Nm, function = 1,6 Nm.

Supply
1 round knob



TECHNICAL DATA

Material	ABS (UL 94 HB)	Diameter	40 mm
Colour	black RAL 9005	Height	15 mm
Standards	RoHS compliant, REACH compliant	Bore hole	6 mm

Please take the dimensions from current parts. These are subject to material- and manufacturing-specific tolerances.

PURCHASING DATA

Weight/1 part	10 g
Customs tariff number (OKW product)	84879090
Country of manufacture	Germany

CUSTOMISING OPTIONS

What else do you need to create your own personal product? We can supply our enclosures and tuning knobs fully modified to suit your electronic components and design requirements. Please advise for anything else we can do for you.

A2540060

ROUND KNOB 40, without line

Customising options for A2540060



Machining



Printing



Installation / Assembly of accessories

A2540060

ROUND KNOB 40, without line

SYSTEM COMPONENTS TO COMPLETE



A4140000
Cover 40, without line
ABS (UL 94 HB)
black RAL 9005



A4140002
Cover 40, without line
ABS (UL 94 HB)
red RAL F12/0-10



A4140007
Cover 40, without line
ABS (UL 94 HB)
pebble grey RAL 7032



A4140008
Cover 40, without line
ABS (UL 94 HB)
dusty grey RAL 7037



A4140100
Cover 40, with line
ABS (UL 94 HB)
black RAL 9005

ACCESSORY "SCREWS"



A6207009
Round nut M7 x 0.75



A6210009
Round nut M10 x 0.75



A6295009
Round nut 3/8"-32G



A6300000
Spanner

ACCESSORY



A4240000
Arrow disk 40
ABS (UL 94 HB)
black RAL 9005



A4240008
Arrow disk 40
ABS (UL 94 HB)
dusty grey RAL 7037



A6600064
Torsion protection 6/4.6





A7340010
Disk 40, with line
ABS (UL 94 HB)
black RAL 9005


A2540060


ROUND KNOB 40, without line

Subject to technical modification without notice. © by OKW Gehäusesysteme, Buchen/Germany.

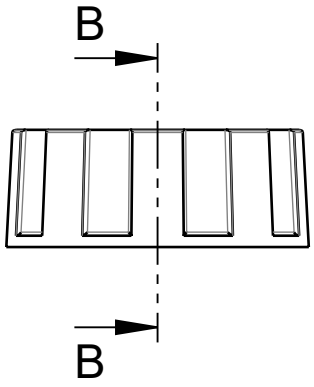

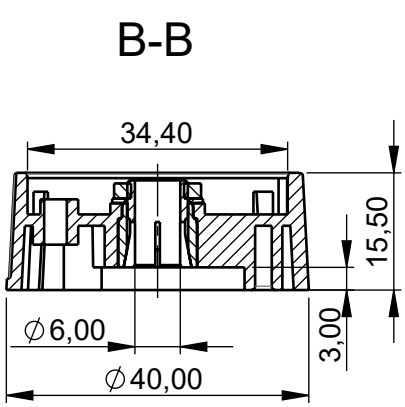

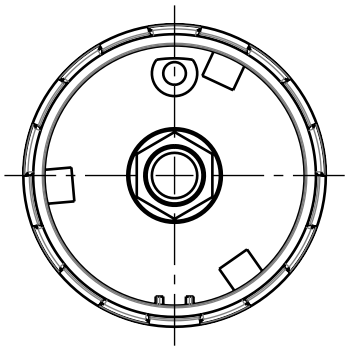



Bitte die Maße an aktuellen Teilen abnehmen.
Diese unterliegen material und produktionsspezifischen Fertigungstoleranzen

Please take the dimensions from current parts.
These are subject to material- and manufacutring-specific tolerances

Informationskopie
wird nicht aktualisiert
Copy for Information
will not be updated

Erst. am:	17.01.2013
Erst. von:	D. Hasselbach
Freig. am:	30.09.2013
Freig. von:	D. Hasselbach
Revision:	01

Toleranzen: DIN 16901 T130	Status: SERIENFREIGABE	DIN 6 Teil 2
Volumen:	Zeichnungsart: KUNDE	

Technische Änderungen vorbehalten. Irrtümer oder Druckfehler begründen keinen Anspruch auf Schadenersatz. Wichtige Einbaumaße bitte direkt mit dem aktuellen Produkt abstimmen.

Subject to technical modification without prior notice. Typographical and other errors do not justify any claim for damages. All dimensions should be verified using an actual moulded part.

Sous reserve de modifications techniques. Toute erreur ou faute d'impression ne justife aucune demande d'indemnisation. Nous prions les clients de verifer les dimensions des composants avec les boitiers avant le montage.

OKW GEHÄUSE SYSTEME

This document contains proprietary information of OKW Gehäusesysteme GmbH and is tendered subject to the conditions that the information be retained in confidence not be reproduced or copied and not be used or incorporated in any product.

KOMBIKNOEPFE-SPANNZANGE 40
Rundknopf 40 mit Spannzange d=6mm

A2*4006*

M 1:1

Für dieses Dokument behalten wir uns alle Urheberrechte vor. Es darf auch auszugsweise weder vervielfältigt noch Dritten in irgendeiner Form zugänglich gemacht werden.

Dateiname: 0001223A