
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 12/08/03 | B.MAZEJKA |
| B | ECN3196: UPDATE DWG FORMAT | 2/13/08 | D.GRIFFIN |
| C | ECN3680, ADDED PACKAGING TABLE | 2008.10.30 | E. STAUBLE |
| C | ECN99999:REMOVED PACKAGE IN POLYBAG NOTE | 11/10/08 | D.GRIFFIN |

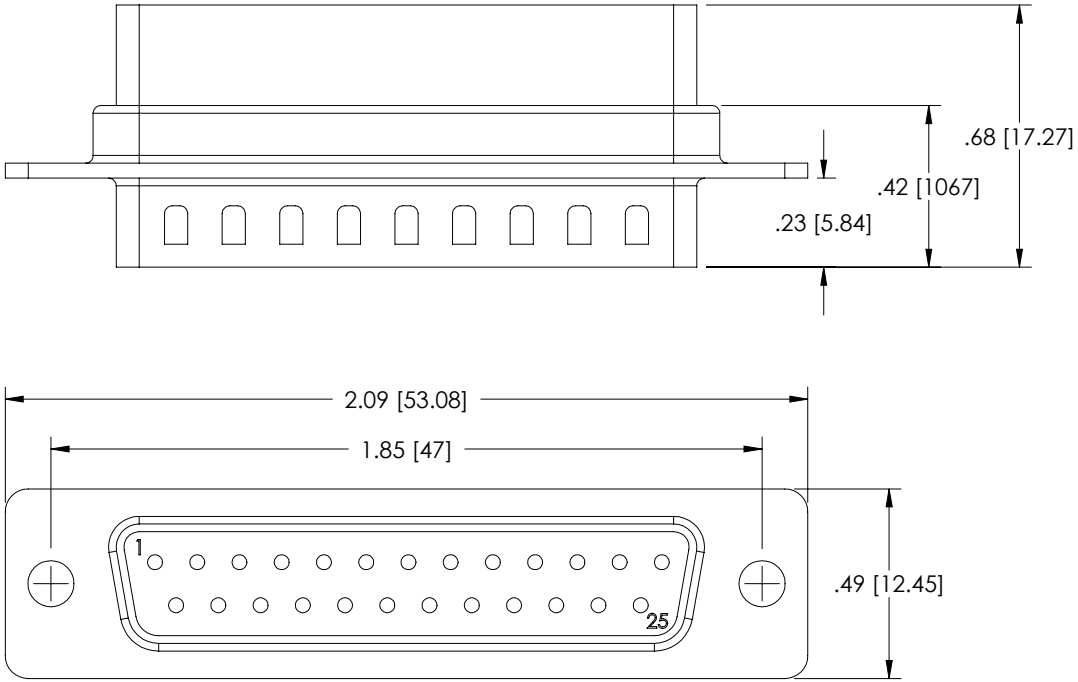


NOTES:

**MATERIAL:**
SHELL: STEEL
INSULATOR: PBT W/GLASS FIBER FILL (UL 94V-0 RATED)

**FINISH:**
FRONT SHELL: BRIGHT TIN/NICKEL PLATED
REAR SHELL: BRIGHT TIN PLATED

**RoHS Compliant** ✔

| CATALOG # | PACKAGING |
|---|---|
| C&P25M | 1/BAG |
| C&P25M-TRAY | 50/TRAY |

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] - 60 [1524] = +2 [51] / -0
>60 [1524] - 120 [3048] = +4 [102] / -0
>120[3048] - 300[7620] = +6 [152] / -0
>300[7620] = +5% / -0%

ALL OTHER DIMENSIONAL TOLERANCES:
.X = .3
.XX = .15

PROJECTION

| APPROVALS | DATE |
|---|---|
| DRAWN BY B.MAZEJKA | 11/10/2003 |
| CHECKED BY C.McCORMICK | 12/08/2003 |
| APPROVED BY D.PARHAM | 12/08/2003 |

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

REF

L-com CONNECTIVITY PRODUCTS

45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: DSUB

PRODUCT DESCRIPTION: DB25M CRIMP & POKE CONNECTOR

| SIZE | FSCM NO. | DWG. NO. | REV. |
|---|---|---|---|
| A | 43321 | C&P25M | C |

SCALE: NONE | CAD FILE: C&P25M.SLDDRW | SHEET 1 OF 1