

(RT) Standard Bayonet Type

RT-M06-L050-K02

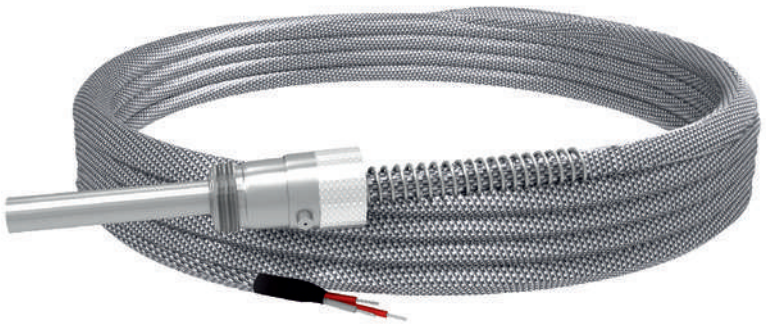


Max. operating temperature	:	-50 °C / +400 °C
Standard cable types	:	Fiber glass + fiber glass + braided wire
Sensor type	:	DIN/EN60751 Class “B’’ 1xPT-100
Protection tube material	:	Nickel coated brass
Connector	:	Standard 1/4 x 19”

Technical drawing

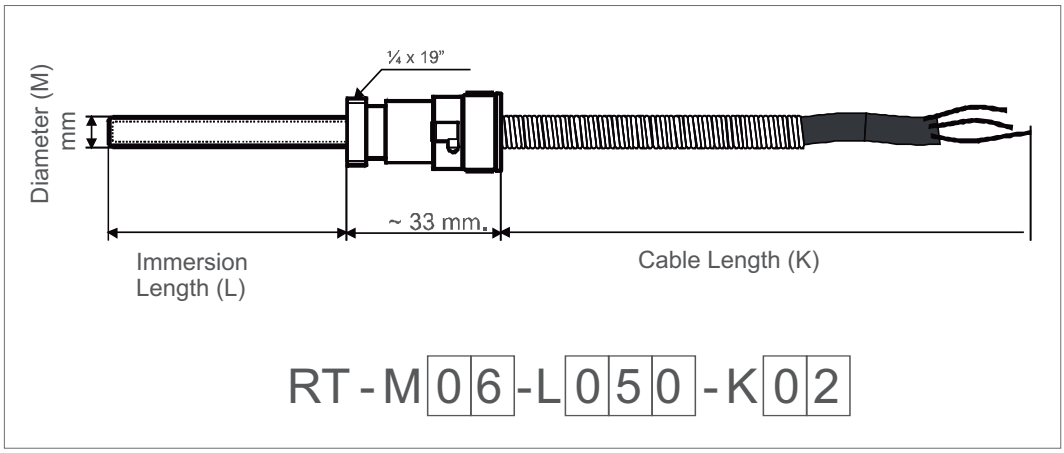

PT-100 Connections



Diameter (M)	:	6 mm
Immersion Length (L)	:	50 mm
Cable lenght (K)	:	2 meter