


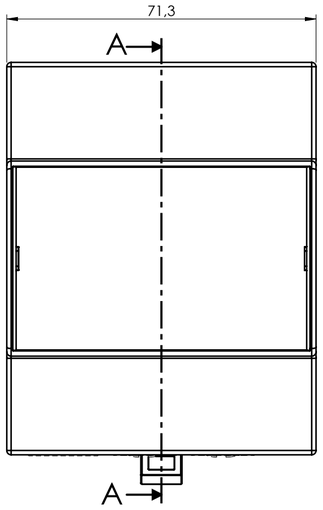


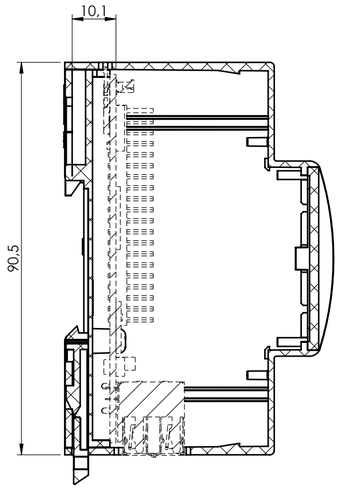



SECTION A-A

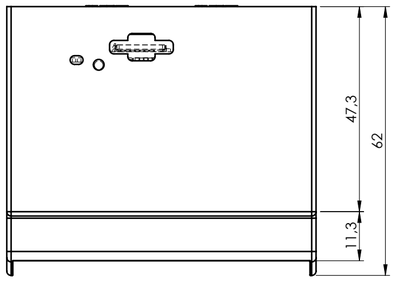


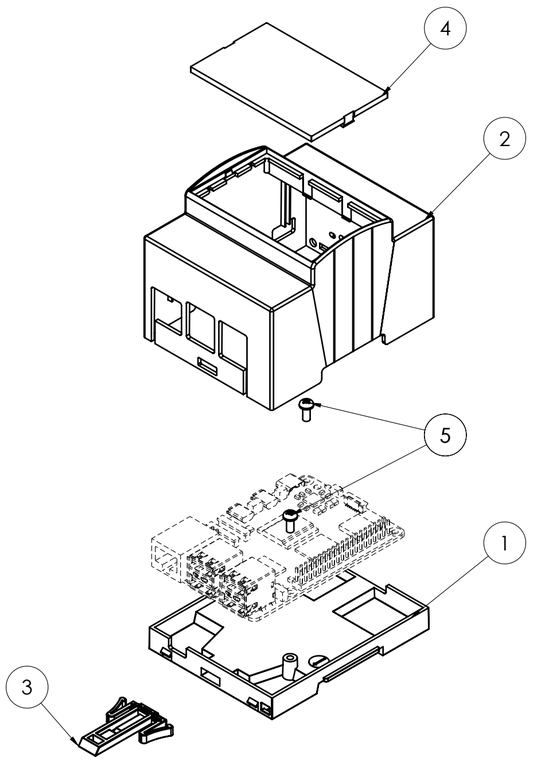


BODY ENCLOSURE

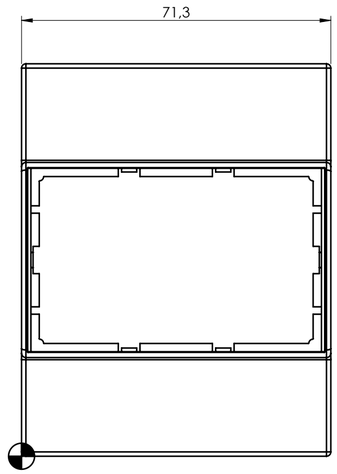


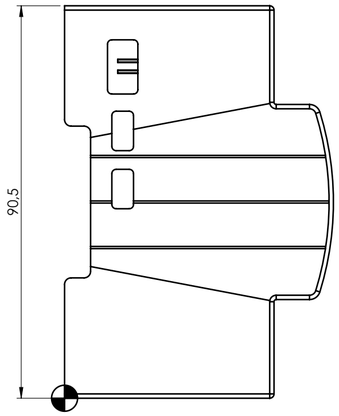


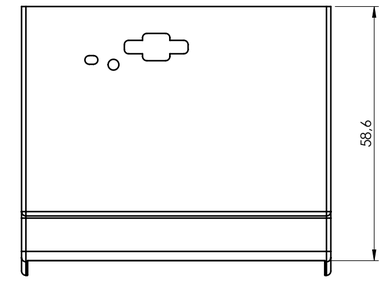

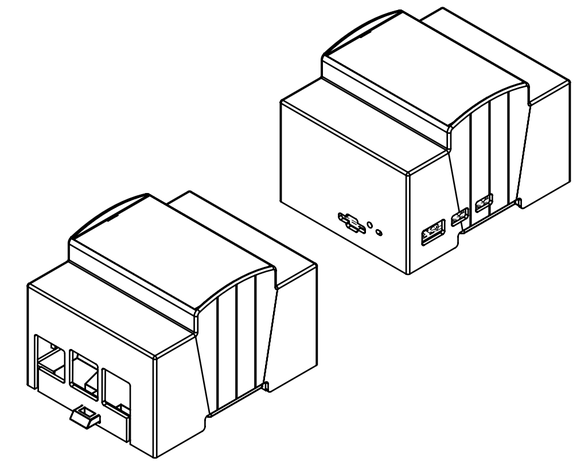



PANEL






BASE

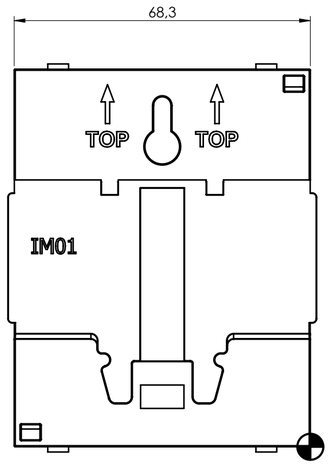


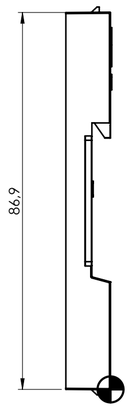





General information:
- Workpiece zero point for mechanical processing
- Minimum recommended radius for machining = R1.0 mm
- Mounting rail like EN 60715: TH 35-7.5 or TH 35-15
- Recommended PCB outline on www.italtronic.com

HOOK







RIF.	Q.TY	DRAWING	DESCRIPTION
1	1	2_050_00025	BASE MODULBOX XT-XTS 4M
2	1	2_050_00050	BODY ENCLOSURE 4M53-C XTS RASPBERRY PI5
3	1	2_250_00072	HOOK FOR MODULBOX XT-XTS
4	1	2_250_00088	PANEL MODULBOX WITHOUT FRAME 4M
5	2	8_100_00003	SCREW d 2.9 X 6.5 TC+ TRUNK-POINT

General Tolerance UNI EN 22768/1 Media (m)					Sheet:
from 0.5 to 3 ± 0.1	from 3 to 6 ± 0.1	from 6 to 30 ± 0.2	from 30 to 120 ± 0.3	from 120 to 400 ± 0.5	1
Scale: 1:1	Drawed: M.S.	Checked: R.N.	Date: 25/10/2023	Material:	Process:
Dimension in mm	The present drawing cannot be reproduced or communicated to 3d parties, even partially, without the authorization of ITALTRONIC SII. Italtronic reserves to protect its own rights according to the law.	Replaces the: --	Derived from: --	Weight: gr	Cod. Mold: --

italtronic
enclosures for electronics
italtronic.com

Description:
KIT 4M XTS RASPBERRY PI5
KIT 4M XTS RASPBERRY PI5

Drawing nr.: **3_050_00041**

Rev.: -

A2