NOTES: (UNLESS OTHERWISE SPECIFIED)

RATING: 10A, 125 VAC; 6A, 250 VAC
1/2 HP, 125/250 VAC

20A, 14VDC, 10A 28VDC
(NOT AGENCY APPROVED FOR DC)

U.L. ENDURANCE RATING 6000 CYCLES.

INITIAL CONTACT RESISTANCE: 50m Ω (MAX)


INSULATION RESISTANCE: 500 VDC 100M Ω (MIN)


DIELECTRIC STRENGTH: 1500 VAC FOR 1 MINUTE.

WATERPROOF: IP65 CAPABLE

OPERATION TEMPERATURE: -25°C TO +85°C

RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM
OF UNDERWRITERS LABORATORIES, INC.

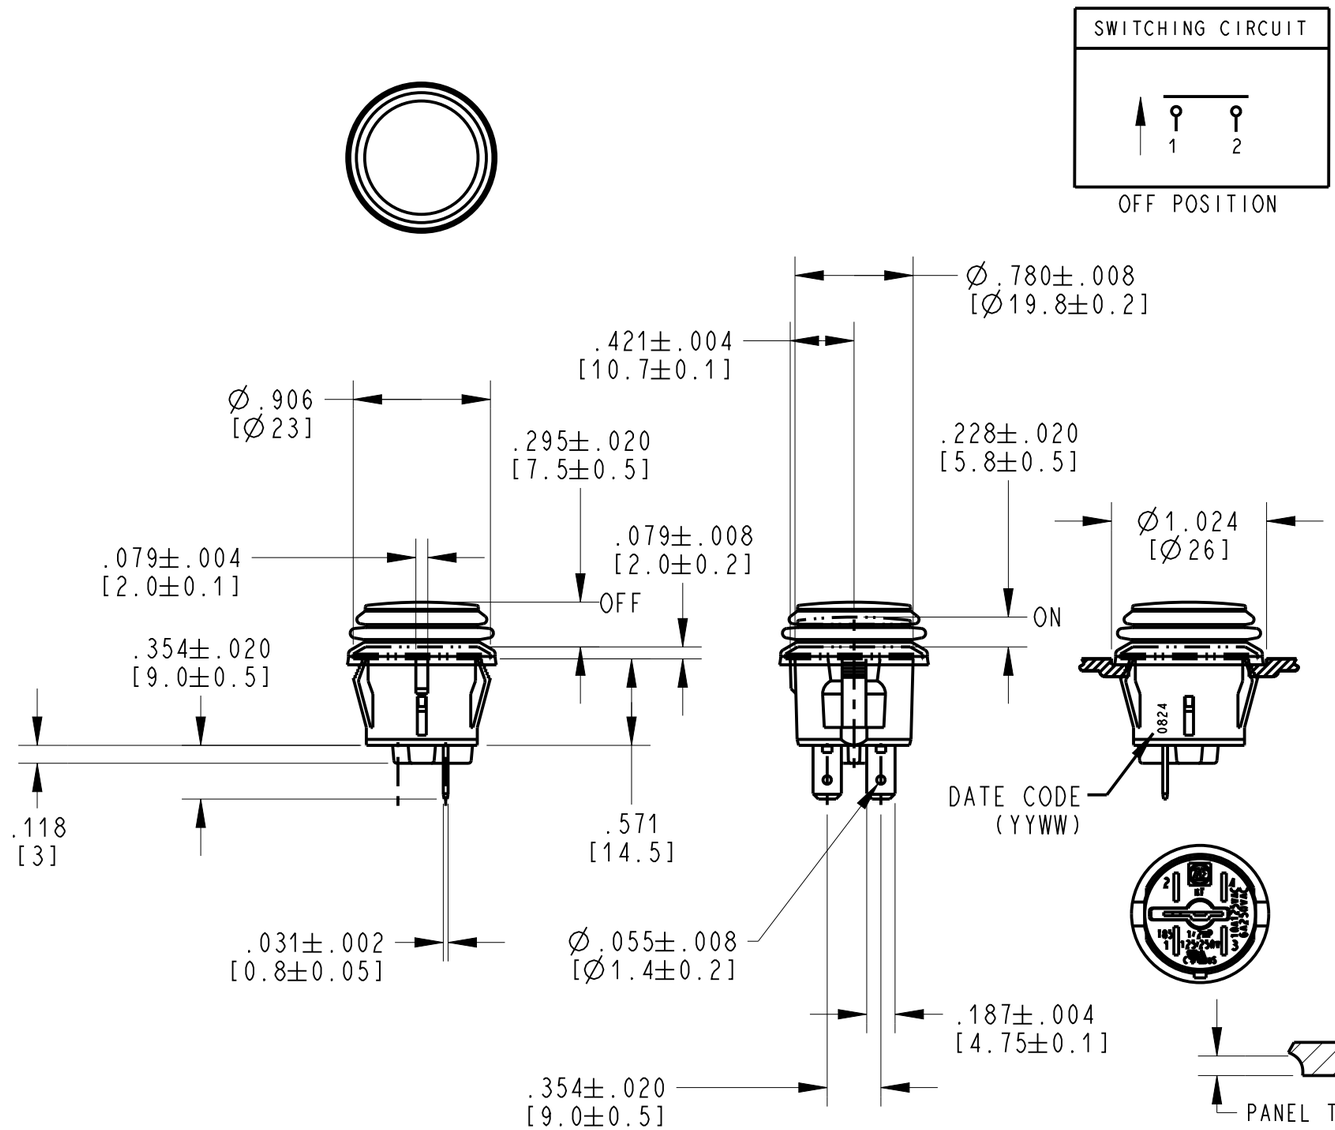

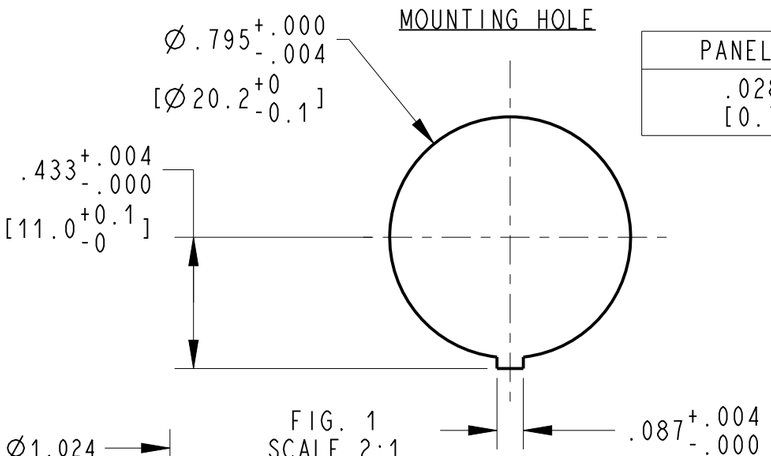

PANEL THICKNESS
.028 TO .098 [0.7 TO 2.5]

FIG. 1
SCALE 2:1

REV	ECO NO.	DATE	PREP	APVD
F	Z000374405	16-Aug-16	JPD	ELL

DWN: C RAMOS
APVD: J RUMMELHART
DATE: 17-Jun-08
THIRD ANGLE PROJECTION

PROJECT/ CSR
4000000138

CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS DOCUMENT OR DERIVED FROM THE INFORMATION THERE IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS CONFIDENTIAL AND PROPRIETARY. REVIEW OR POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC SYSTEMS.

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCH (mm)	± 0.02	± 0.012	± 5.0°

ZF Electronic Systems
11200 88th AVE. PLEASANT PRAIRIE, WI 53158

NAME / DESCRIPTION
KF-SPST (ON)-OFF
NON LIGHTED

B | ITEM NO. KFB2DNA1BBB

SCALE: 1:1 | SH 1 OF 1

ORIGINAL ON PRO/E