

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/9/12	D.GRIFFIN

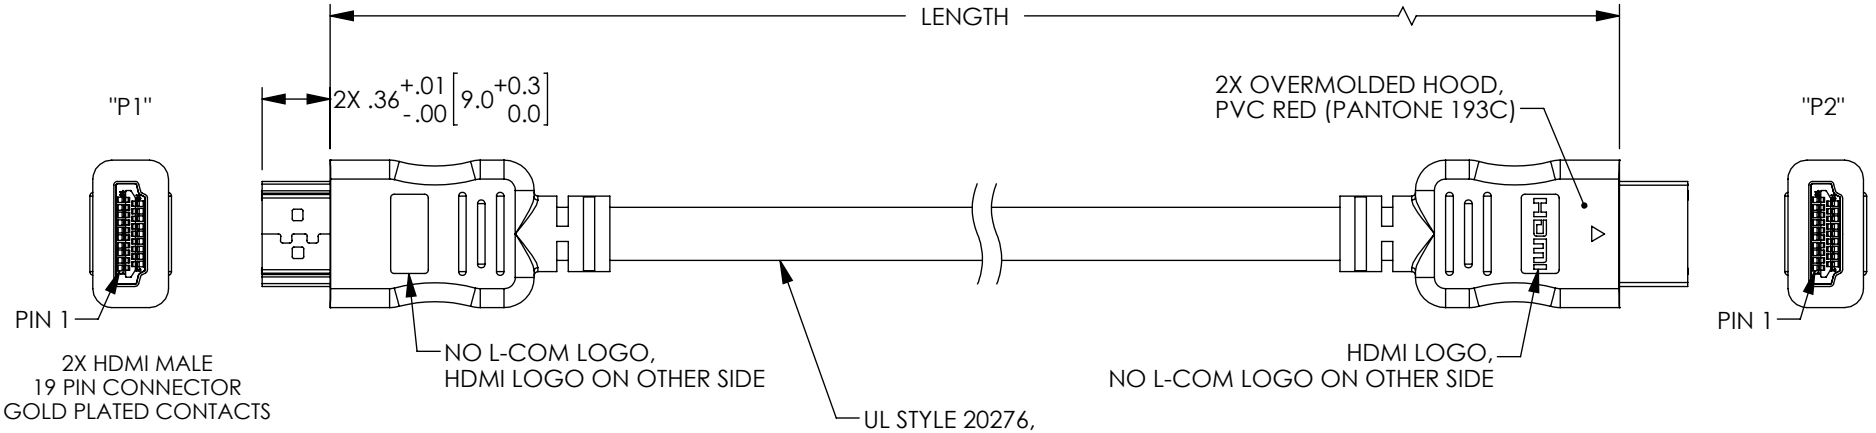

UL STYLE 20276,
(5) INDIVIDUALLY SHIELDED TWISTED PAIRS, 28 AWG, WITH DRAIN WIRE,
(4) INDIVIDUAL CONDUCTORS, 28 AWG,
OVERALL SHIELD: ALUMINUM MYLAR PLUS BRAIDED TINNED COPPER,
OUTER JACKET: PVC, BLACK

WIRE MAP

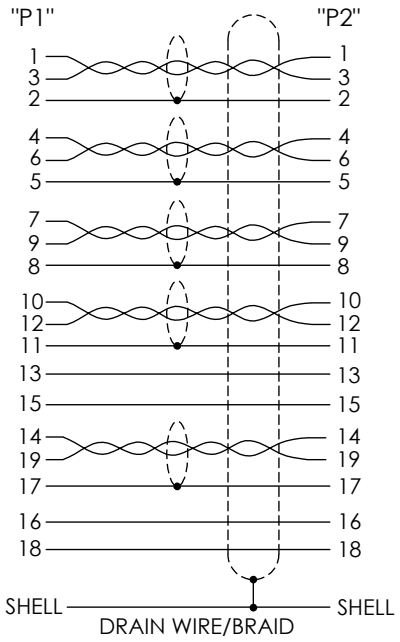

PART NUMBER	LENGTH	
	METERS	FEET
CGHDMM-0.3	0.3	0.98
CGHDMM-0.5	0.5	1.64
CGHDMM-1	1.0	3.28
CGHDMM-2	2.0	6.56
CGHDMM-3	3.0	9.84
CGHDMM-4	4.0	13.12
CGHDMM-5	5.0	16.40

RoHS Compliant ✔

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN A CLEAR POLYBAG AND LABELED PER LSP-010.
3. DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

APPROVALS	DATE
DRAWN BY D. DESJARDIN	4/16/12
CHECKED BY R. SCOTT	4/17/12
APPROVED BY S. SMITH	5/9/12

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: VIDEO

PRODUCT DESCRIPTION: CA HDMI M-M

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CGHDMM	A

SCALE: NONE | CAD FILE: CGHDMM.SLDDRW | SHEET 1 OF 1