
EVC013

Connection cable

VDOGH040MSS0002H04STGH040MSS

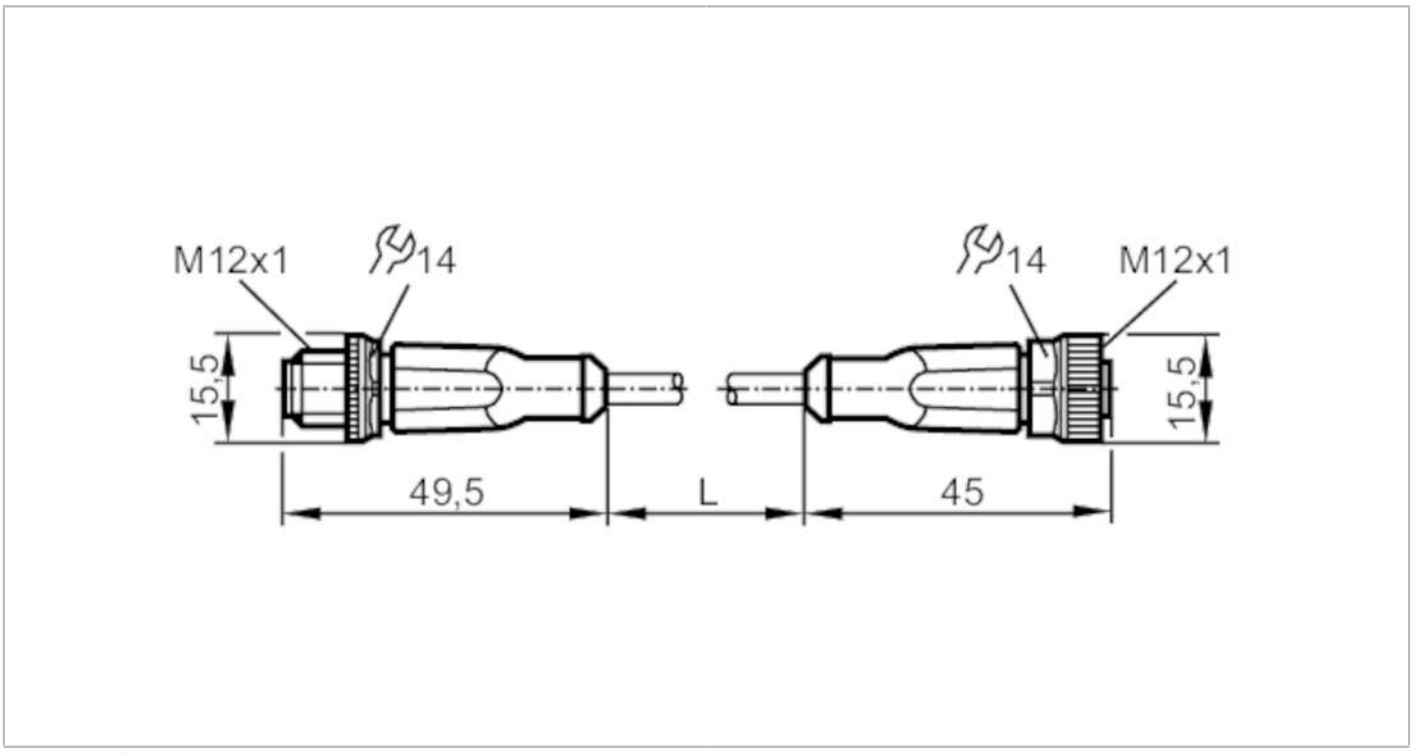

Application		
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 250 AC / < 300 DC
Protection class		II
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...90
Note on ambient temperature		cULus: ...75
Ambient temperature (moving)	[°C]	-25...90
Note on ambient temperature (moving)		cULus: ...75
Protection		IP 65; IP 67; IP 68; IP 69K
Mechanical data		
Weight	[g]	100
Material		housing: TPU (urethane) orange; sealing: FKM
Material nut		brass / brass
Drag chain suitability		Bending radius for flexible applications: min. 10 x cable diameter Travel speed: max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s² Bending cycles: > 5 Mio. Torsional strain: ± 180 °/m
Drag chain suitability		yes

EVC013

Connection cable

VDOGH040MSS0002H04STGH040MSS

Remarks

Pack quantity	1 pcs.

Electrical connection - plug


Connector: 1 x M12, straight; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm



Electrical connection

Cable: 2 m, PUR, Halogen-free, black, Ø 4.9 mm; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Connection

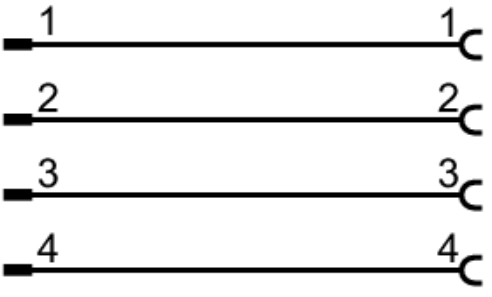

Electrical connection - Socket

Connector: 1 x M12, straight; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm

