182.72.104.66302Kegelrollenlager


Tapered roller bearings 30203-A (Series 302)


main dimensions to DIN ISO 355 / DIN 720, separable, adjusted or in pairs

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue selection system (https://www.schaeffler.de/content.schaeffler.de/en/news_media/index.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	17	mm	
D	40	mm	
T	13,25	mm	
a	10	mm	≈
B	12	mm	
C	11	mm	
$C_{a\ min}$	2	mm	
$C_{b\ min}$	2	mm	
d_1	29,1	mm	≈
$D_{a\ max}$	34	mm	
$d_{a\ max}$	23	mm	
$D_{a\ min}$	34	mm	
$D_{b\ min}$	37	mm	
$d_{b\ min}$	23	mm	
$r_{1,2\ min}$	1	mm	
$r_{3,4}$	1	mm	

$r_{a\ min}$	1	mm	
$r_{b\ max}$	1	mm	
m	0,079	kg	≈ Mass
C_r	19200	N	Basic dynamic load rating, radial
C_{0r}	18700	N	Basic static load rating, radial
e	0,35		
Y	1,74		
Y_0	0,96		
C_{ur}	1890	N	Fatigue limit load, radial
n_G	20100	1/min	Limiting speed
n_B	11800	1/min	Reference speed
	T2DB017		Comparative designation to DIN ISO 355

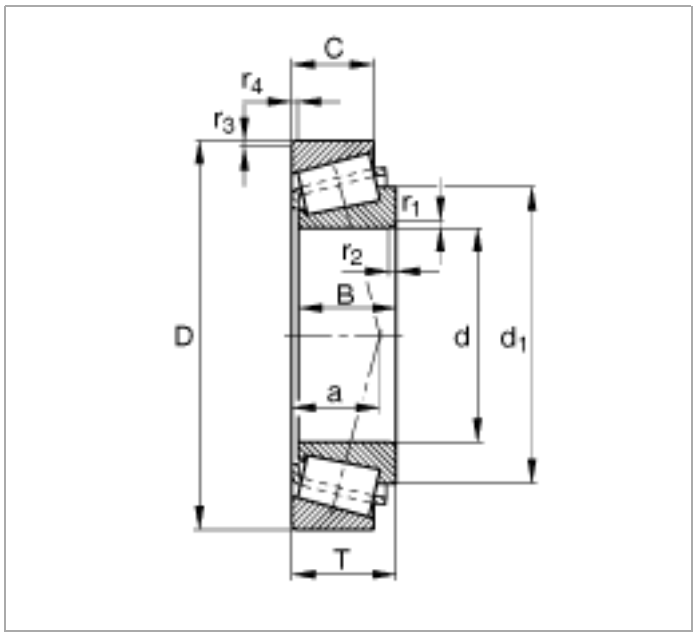

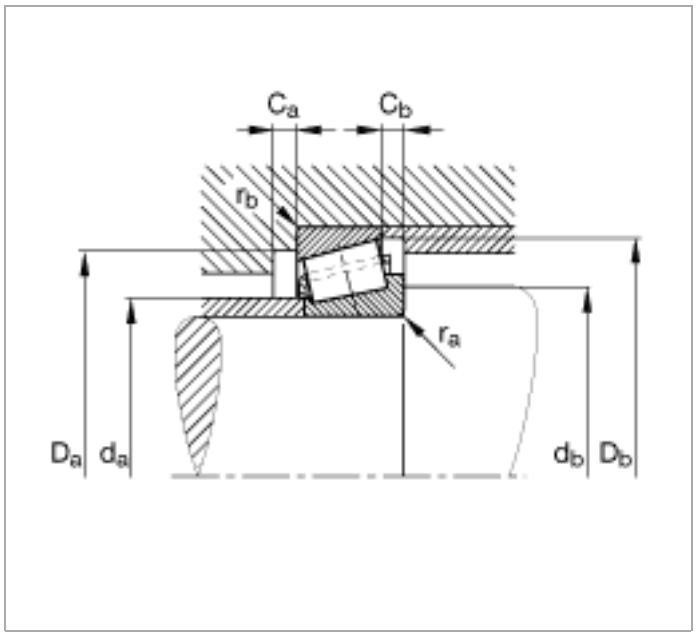
Ca
Cb
rb
ra
Da
da
db
Db