002 PCB TERMINAL BLOCKS
081 TERMINAL STRIPS
095 WIRE TO BOARD CONNECTORS
100 CIRCULAR CONNECTORS
118 IP68 CONNECTORS
158 INTERFACE MODULES AND RELAY BASES

Push-in fast connectors

Product overview

- Screwless connectors for fast and secure wiring installations
- Installation side wires held by lever clamp
- Appliance side held by spring clamp
- Additional entry for cable capacitors
- Suitable for rigid and single strand copper wire
- Moulded in UL94-V0 self extinguishing PA66
- 2 to 5 poles
- Three different types of earth
- Fixing pin options
- Custom terminal markings available on request
- Halogen free
- Glow wire tested EN60695-2-11
- CE, , approved

CPW



SPECIFICATION		
Rating	24A 450VAC	
Working temperature	-30°C to 110°C	
Moulding	UL94-V0 flame retardant PA66	
Insert strap	Steel	
Insert	Steel	
Marking	Standard N Neutral L Live ⏚ Earth	
Cable capacity	Appliance side max. Appliance side min. Capacitor max. Capacitor min. Installation side max. Installation side min.	2x 2.5mm² 0.75mm² 0.75mm² 0.5mm² 2x 2.5mm² 1mm²
Wire trimmings lengths	0.5mm² to 1mm² 1.5mm² to 2mm² Capacitor	8mm - 9mm 9mm - 10mm 9mm - 11mm

Without fixing pins

POLES	WITHOUT EARTHING	EARTH A	EARTH B	EARTH C
2	CPW2	-	-	-
3(2 + Earth)	CPW3	CPW3A	CPW3B	CPW3C
4(3 + Earth)	CPW4	CPW4A	CPW4B	CPW4C
5(4 + Earth)	CPW5	CPW5A	CPW5B	CPW5C

With fixing pins

POLES	WITHOUT EARTHING	EARTH A	EARTH B	EARTH C
3(2 + Earth)	CPW3S	CPW3SA	CPW3SB	CPW3SC
4(3 + Earth)	CPW4S	CPW4SA	CPW4SB	CPW4SC
5(4 + Earth)	CPW5S	CPW5SA	CPW5SB	CPW5SC

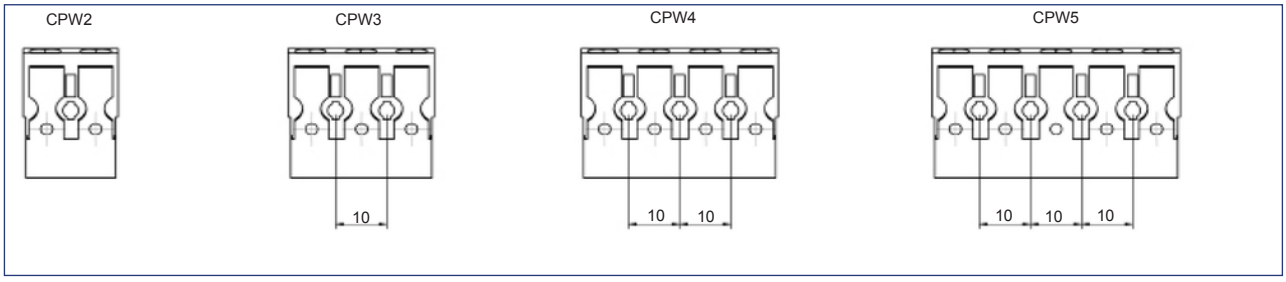

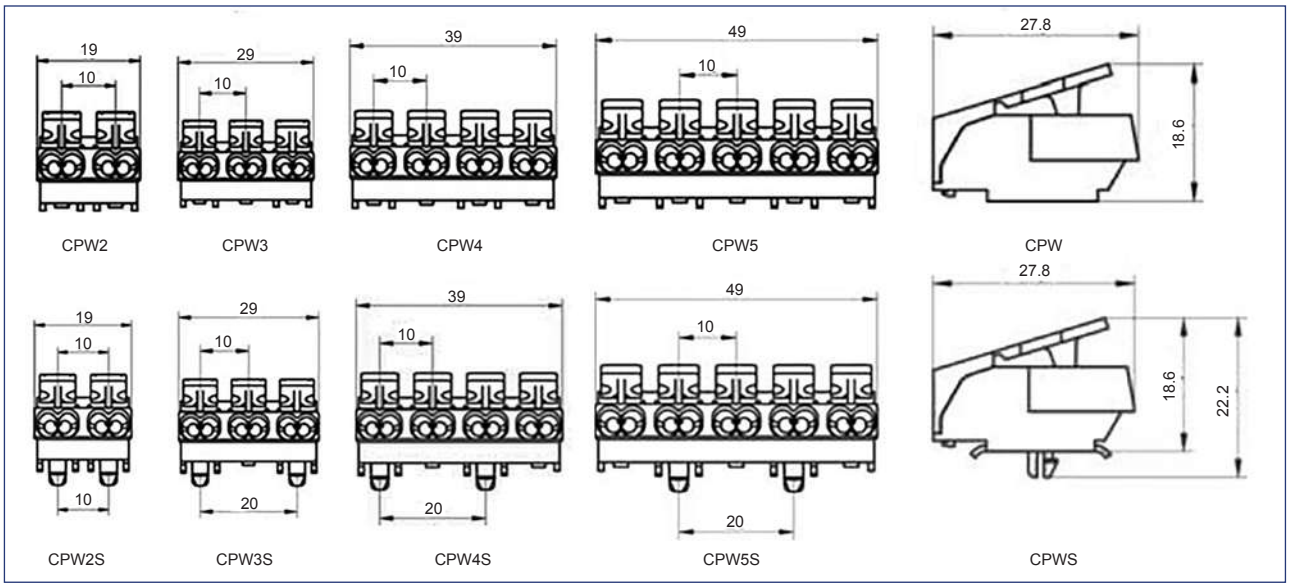

002 PCB TERMINAL BLOCKS
081 TERMINAL STRIPS
095 WIRE TO BOARD CONNECTORS
100 CIRCULAR CONNECTORS
151 IP68 CONNECTORS
158 INTERFACE MODULES AND RELAY BASES

EARTH A



EARTH B



EARTH C



Strain relief

Product overview

- Clamps external conductors in lighting fixtures according to EN 60598
- Natural colour PA6
- Relieves strain on cables
- Prevents conductors from twisting
- Protects wire coating from abrasion and friction

CSR



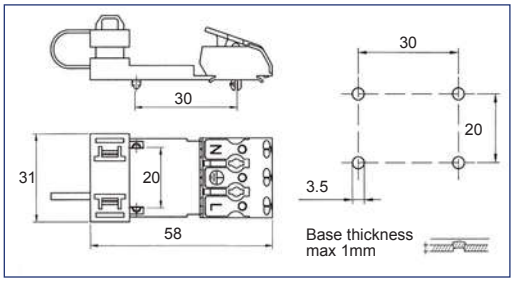

PART NO.	TERMINAL STRIP
CSR6	CPW

+44 (0)1638 716101 | sales@camdenboss.com | www.camdenboss.com

We operate a constant improvement policy, our products are subject to change without notice.

Vers 1

bsi. ISO 9001 Quality Management FM 28614 ISO 14001 Environmental Management EMS 613558