826 Permanent Beacon



Base/Bracket Mounting



Tube Mounting



Accessories

- Tube mounting solution suitable for Ø 25 mm and 1/2" NPT tubes
- Simple mounting
- Removal of the lens only possible with tools

TECHNICAL SPECIFICATIONS:

Dimensions (Ø x Height):	98 mm x 137 mm (Base/Bracket mounting) 98 mm x 200 mm (Tube mounting)
Cable entry:	Cable diameter 5-7 mm
Housing:	PC/ABS-Blend
Lens:	PC, transparent
Connection:	Screw free clamp mechanism max. 1.5 mm²
Operating voltage:	Max. 250 V for BA15d
Bulb:	Max. 15 W
Duty cycle:	100 % max. 15 W, 50 % max. 25 W
Socket:	BA15d

Bulb not included in assembly.

ORDER SPECIFICATIONS:

Fixing	Base/Bracket mounting	Tube mounting
Voltage	12-240 V	12-240 V
red	**826 100 00**	**826 110 00**
green	**826 200 00**	**826 210 00**
yellow	**826 300 00**	**826 310 00**
clear	**826 400 00**	**826 410 00**
blue	**826 500 00**	**826 510 00**

ACCESSORIES:

Plastic bracket for wall mounting		**975 826 05**
Wire guard, galvanised, only for base mounting		**975 826 03**
Tube Ø 25 mm, all anodized aluminium, 100 mm long		**975 845 10**
Base for tube, plastic		**975 840 90**
Base for tube, metal		**975 840 91**
Bulb BA15d, 15 W, total length 48 mm	24 V **955 826 35**	230 V **955 826 38**

TECHNICAL DIAGRAMS:

see page 316

Sizes of Permanent Beacons



Base/Bracket mounting

See note on page 347

Base/Bracket mounting

Tube mounting


IP65

+50°C


-20°C

WERMA SIGNALTECHNIK


Technical Diagrams

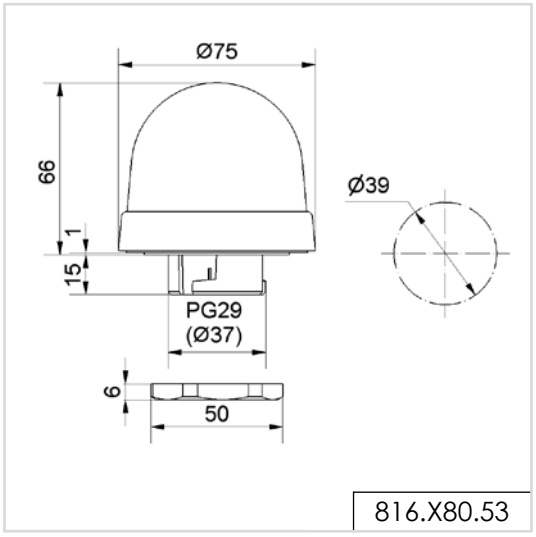


816.X80.53

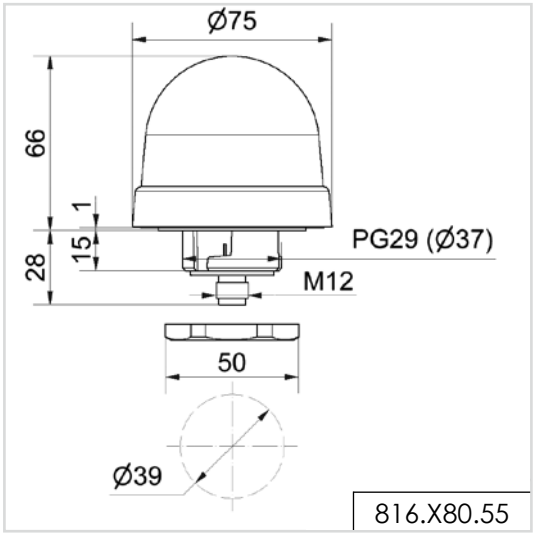


816.X80.55

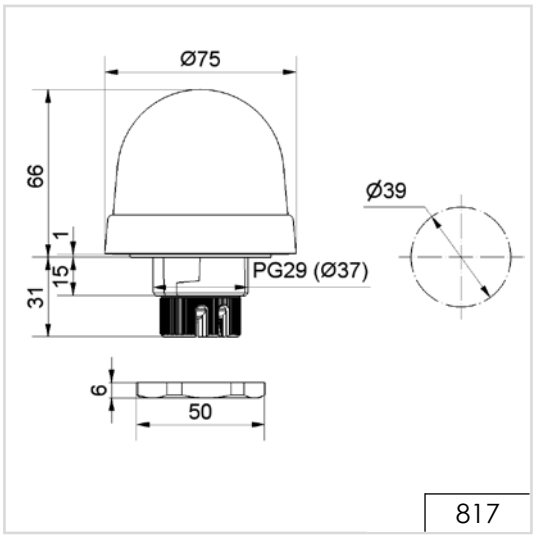


817

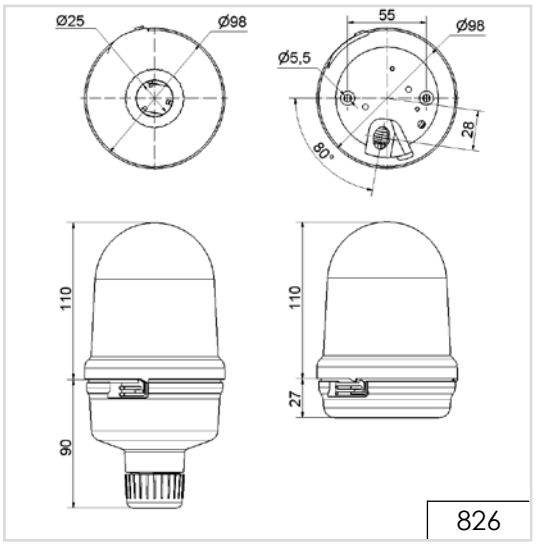

826

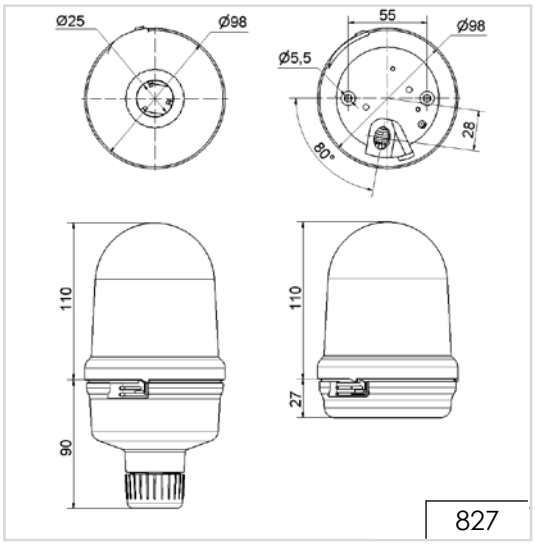


827

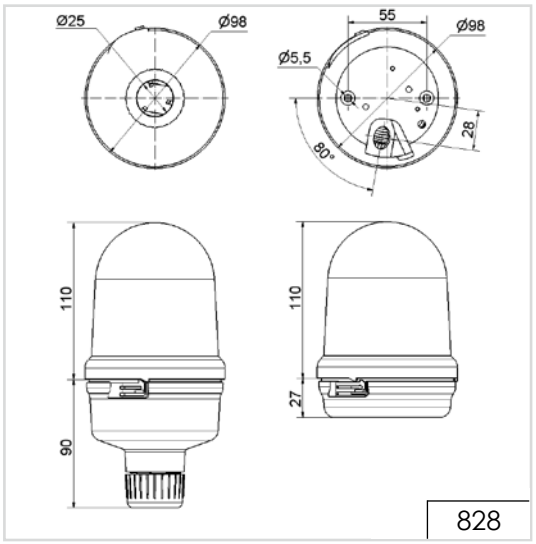


828

WERMA SIGNALTECHNIK


Technical Diagrams

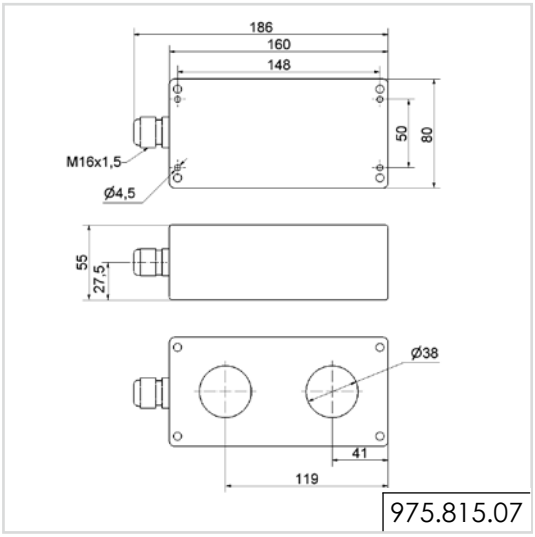


975.815.07

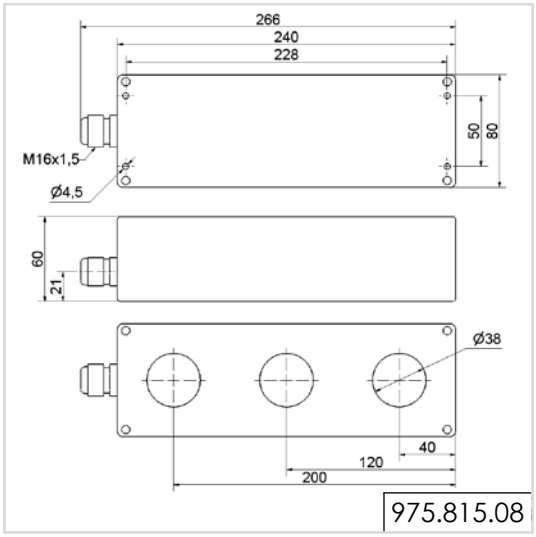


975.815.08

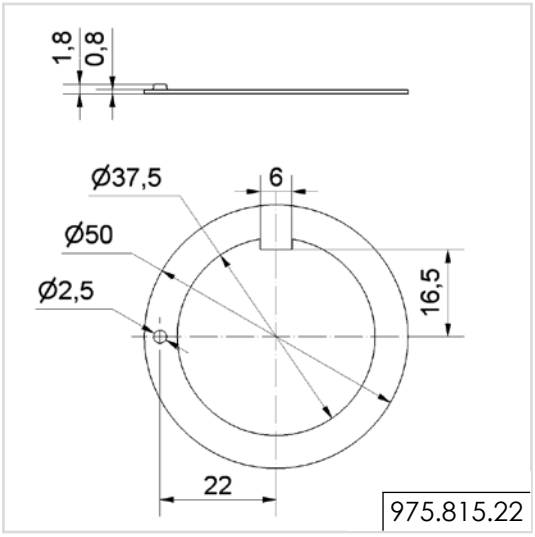


975.815.22

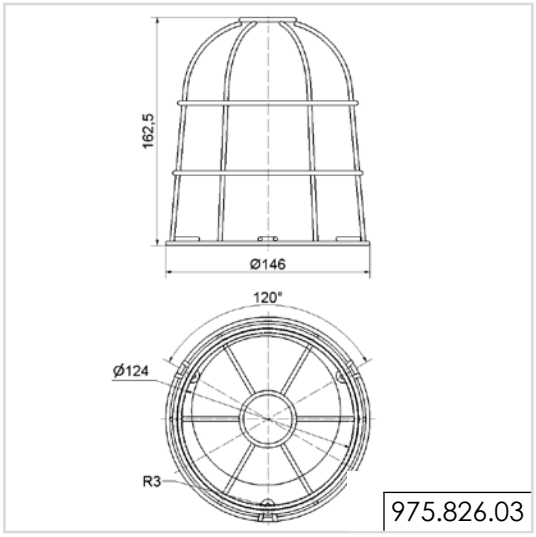

975.826.03

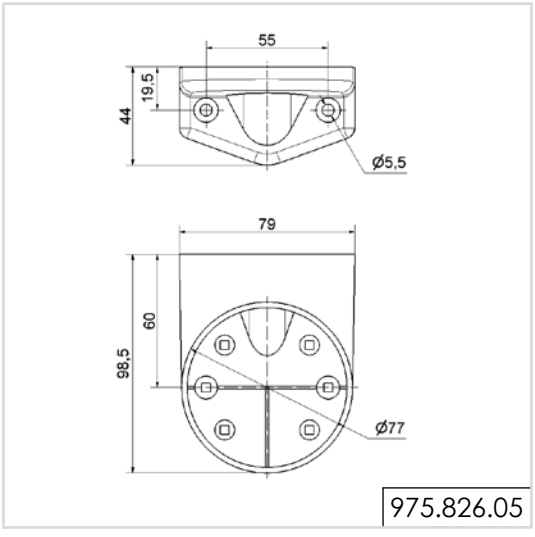

975.826.05

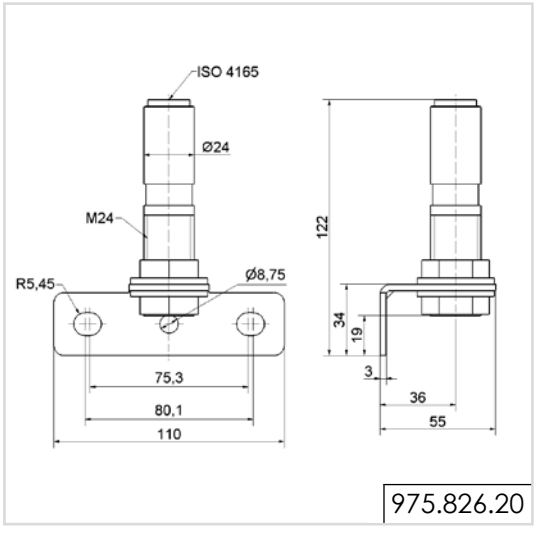

975.826.20