stay connected

SVS ECO VALVE PLUG FORM BI 11MM 230V

2+PE field-wireable M16x1.5

Form BI (11 mm)
250 V AC/DC
without components
metric
field-wireable

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product


Illustration

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20


stay connected



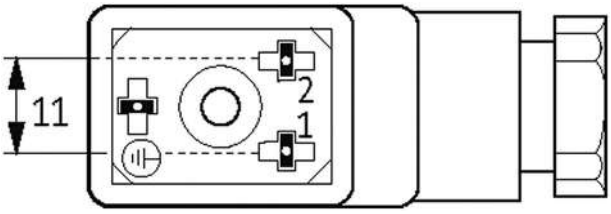

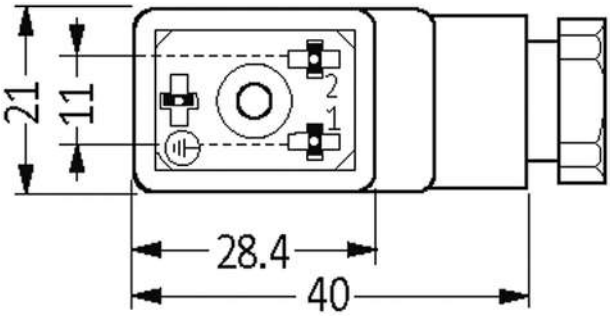

Height: 31 mm

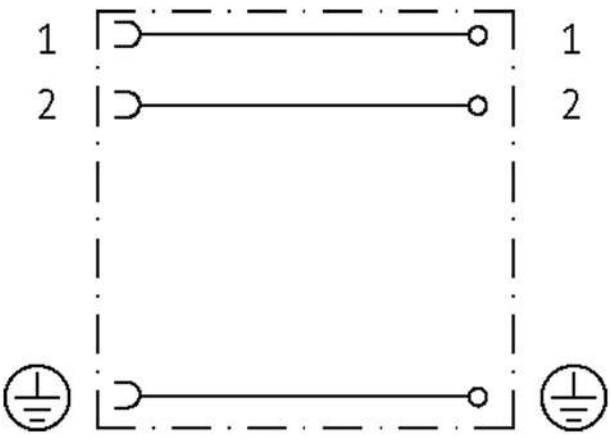

Product may differ from Image

Approvals

EAC	ChinaRoHS25

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20

MURR ELEKTRONIK
stay connected

Form	
Form	30005
Technical Data	
Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 10 A
Configuration	2 contacts + PE
Connection cross section	0.5...1.5 mm²
Sealing range (cable Ø)	6...8 mm
Locking of ports	M3 (recommended torque 0.4 Nm)
Compression gland	M16×1.5 mm
Contact figure	Cable outlet can be turned in 180° steps
Protection	IP65 inserted and tightened (EN 60529)
General data	
Temperature range	-40...+90 °C
Material (gasket)	NBR
Mounting method	inserted, tightened
Commercial data	
country of origin	HU
customs tariff number	85366990
EAN	4048879187046
eClass	27279221
Packaging unit	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20