RE92.CHECKMATE

Dual loop controller for industry purpose.



- Simple and user-friendly service
- Safety and reliability guaranteed thanks to:
  - installation category III
  - proper galvanic isolation
  - noise immunity
- Universal separated measuring inputs
- Automatic parameter selection according to the controlled object
  – SMART PIDalgorithm
- Digital communication - RS-485(standard) , Ethernet (option)

MODERN CONTROL FUNCTIONS

- **independent dual loop control**
- **PID control, on/off, three-step control of heating-cooling, and step-by--step control**
- **innovative SMART PID algorithm with auto-tuning function (automatic selection of PID parameters)**
- the source of control signal is one of the two inputs or the sum/difference of the signal from two inputs combined
- 4 sets of PID parameters and additional set for cooling (for each loop)
- 6 types of alarm with programmable hysteresis and memory (latch function)
- digital communication - RS-485 (standard), Ethernet (option)
- Gain Scheduling feature - automatic PID set switching, depending on the set temperature (when the object behaves decidedly differently in various temperatures)

INTUITIVE AND USER FRIENDLY INTERFACE

- **3.5" full-colour graphic screen with luminosity control**
- **menu available in English**
- **password-protected regulator access (4 users, 3 access levels)**
- signaling a state of binary inputs and two-state outputs

RELIABLE CONTROL WITH FIXED SETPOINT

- **4 set point values switchable by the binary inputs (for each loop)**
- **soft-start function for set point values change, programmable increase/decrease**
- also an additional input may serve as the source of set point value (input 3)

ADVANCED PROGRAMMING CONTROL

- **20 internal programs (10 programs per loop)**
- **15 units per program**
- signaling up to 6 events per unit (two-state outputs)
- selection of PID parameters for any unit
- iterations number setting (up to 9999 repetitions)

RE92 is an advanced dual loop controller for industrial use. It was designed for demanding industrial applications. RE92 can control two controlled objects independently or control two physical values in one object (e.g. in the two-zone furnaces). Thanks to the universal measuring inputs, it can be used for controlling of temperature and other physical values (e.g. pressure, humidity). Every user can update controller's software individually, thus getting access to the additional features added by the LUMEL development team.

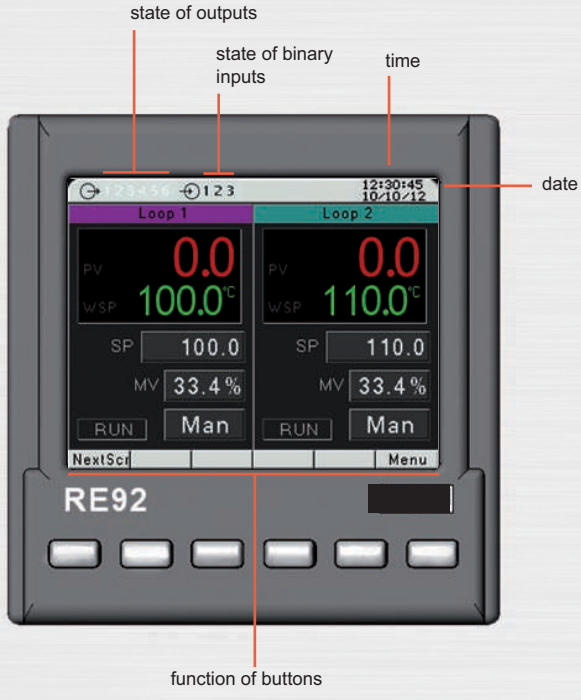

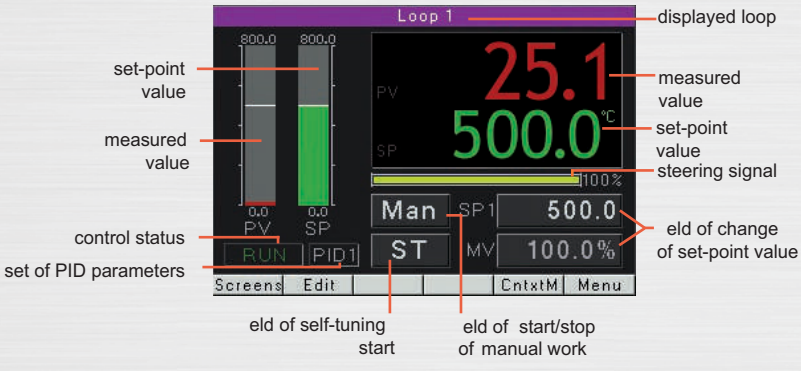

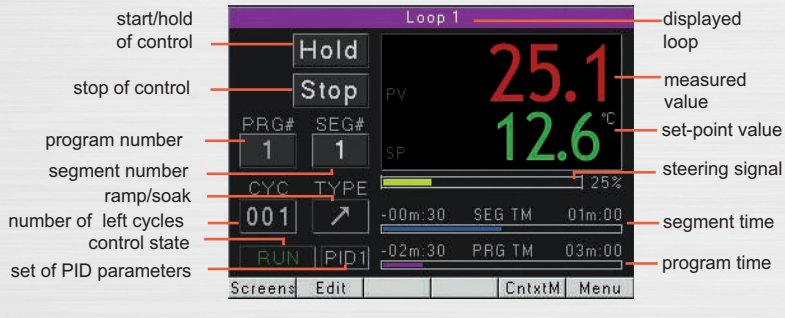

Connections description

Universal supply
- 85…253 V a.c./d.c
- installation category III

Multi-functions outputs
- 6 relay outputs or 2 binary and 4 relay outputs
- outputs features: control, alarm, signaling events and binary output state in programming control

Mini USB port
- designed for future uses

Additional input (option)
- input 0/4...20 mA, 0...5/10 V or 0…100/1000 Ω
- programmable indication range
- averaging of the measurements with programmable time lter
- functions: measurement of controled signal and set point value

Etherne interface (option)
- Modbus TCP protocol
- for the monitoring of the regulator and programming

Free updates
- software self-update using SD memory card

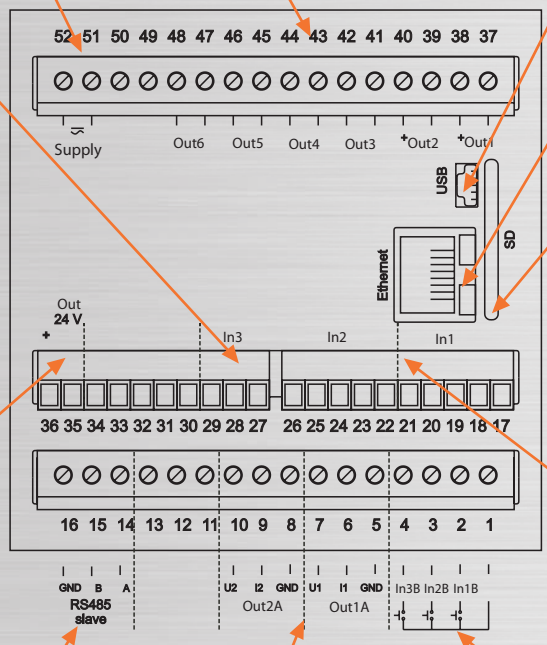

Object transducer supply (option)
- 24 V d.c., max. 30 mA
- for external transducers and sensors

Universal inputs
- 2 programmable measuring inputs (temperature sensor, 0/4...20 mA i 0...5/10 V)
- programmable indication range
- averaging of the measurements with programmable time lter

RS-485 interface (slave)
- Modbus RTU protocol
- for the monitoring of the regulator programming

Analog outputs (option)
- two programmable analog output 0/4...20 mA and 0...10 V
- outputs features: control, retransmission

Binary/logic inputs
- 3 voltageless binary inputs
- inputs features: stop control, manual /automatic control, program control, relay outputs control

Galvanic isolation

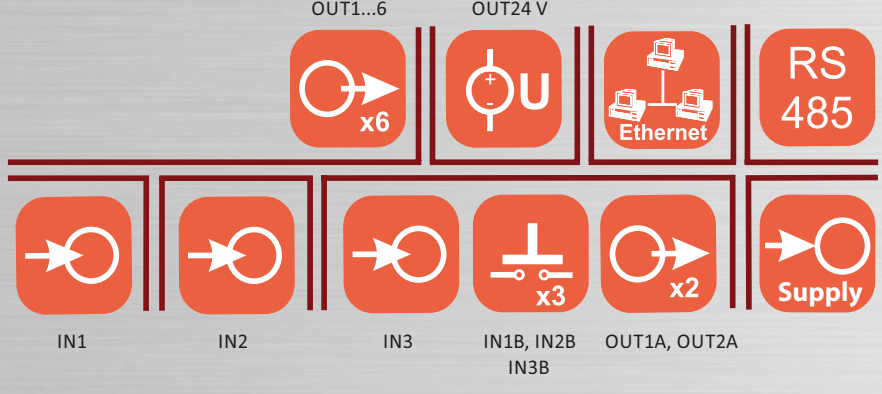

TECHNICAL DATA

Inputs			
Input type	**Range**	**Error**	**Additional error**
Universal main inputs 1 and 2			
Pt100	-200 ... 850°C	0.2%	Compensation of wire resistance changes in 3-wire connection: < 0.1% Compensation of thermocouple reference cold junction: < 2°C Ambient temperature change: 0.1% / 10 K
Pt500	-200 ... 850°C	0.2%	
Pt1000	-200 ... 850°C	0.2%	
Ni100/1,617	-60 ... 180°C	0.2%	
Cu100/1,426	-50 ... 180°C	0.2%	
Fe-CuNi (J)	-100 ... 1200°C	0.3%	
Cu-CuNi (T)	-100 ... 400°C	0.3%	
NiCr-NiAl (K)	-100 ... 1372°C	0.3%	
PtRh10-Pt (S)	0 ... 1767°C	0.5%	
PtRh13-Pt (R)	0 ... 1767°C	0.5%	
PtRh30-PtRh6 (B)	0 ... 1767°C	0.5%*	
NiCr-CuNi (E)	-100 ... 1000°C	0.3%	
NiCrSi-NiSi (N)	-100 ... 1300°C	0.3%	
Current (I)	0/4 ... 20 mA	0.2% +/- 1 digit	
Voltage (U)	0 ... 5/10 V	0.2% +/- 1 digit	
Additional input			
Current (I)	0/4 ... 20 mA	0.2% +/- 1 digit	Ambient temperature change: 0.1% / 10 K
Voltage (U)	0 ... 5/10 V	0.2% +/- 1 digit	
Resistance (R)	0 ... 100/1000	0.2% +/- 1 digit	
Logic input	voltageless		

* error concerns the range: 200...1767 °C (392 ... 3212.6 °F)

Outputs		
Output type	**Properties**	**Remarks**
Relay	6/4 outputs	switching contacts, 2 A/ 230 V
Voltage transistor	0/2 outputs	0/5 V (I_{max}=20 mA)
Continuous voltage	0...2 outputs	0...10 V, R_{load} 1 k
Continuous current	0...2 outputs	0/4...20 mA, R_{load} 500

Digital Interface		
Interface type, protocol	**Mode**	**Baud rate**
RS-485, MODBUS RTU	8N2, 8E1, 8O1, 8N1	2400, 4800,9600, 19200, 38400, 57600, 115200 bit/s
Ethernet, MODBUS TCP Slave		

External Features		
Readout eld	colorful display TFT 3,5''	320 x 240 pixels
Overall dimensions	external: 96 x 96 x 100 mm	panel cut-out: 92.5 x 92.5 mm
Weight	< 0.5 kg	
Protection grade	from the frontal side: IP65	from the terminal side: IP20

Rated Opera?ng Condi?ons		
Supply voltage	85...253 V a.c./d.c.	frequency: 40... 50...440 Hz
Temperature	ambient: 0... 23...50°C	storage: -20...70 °C
Humidity	< 85%	without condensation
Operating position	any	

Safety and Compa?bility Requirements		
Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Pollution level	2	
Installation category	III	
Maximal phase-to-erth operating voltage	for supply circuit, relay outputs: 300 V	for input circuits, interface, continuous and voltage 0/5 V outputs: 50 V
Altitude above sea level	up to 2000 m	

SOFTWARE

For easy programming and devices con guration offers one common LPCon software.
It is developed with expansion of the products offer. RE92 controller support has been implemented since LPCon version 1.2.8.0.

LPCON - FREECONFIGURATION TOOL

- program for remote service of RE92 con-guration (by RS-485 interface)
- user-friendly saving of the con guration to le and fast copying the settings to other RE92s

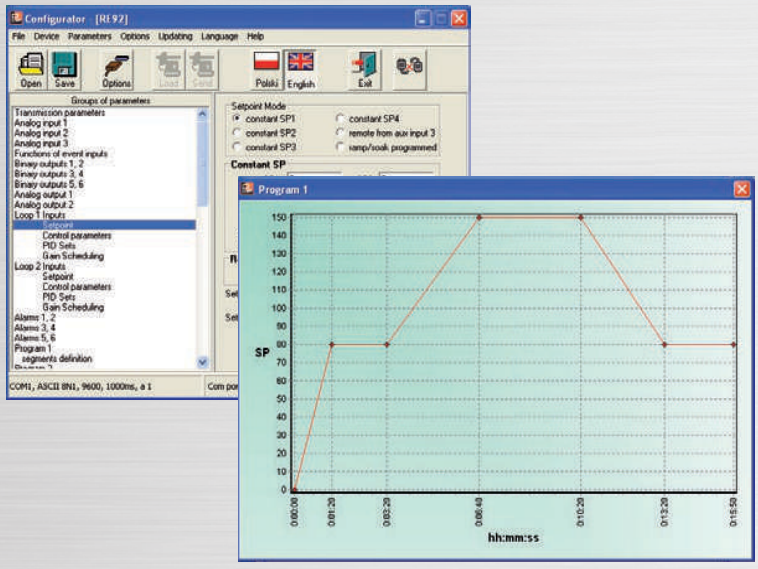

ORDERING CODE

RE92 -	X	X	X	X	X	XX	X	X
Input 3:								
none	0							
current: 0/4...20 mA	1							
voltage: 0...5/10 V	2							
potentiometric transmitter: 100/ 1000 Ω	3							
Output 1 and 2:								
2 relays		1						
2 binary outputs 0/5 V		2						
Analog outputs:								
none			0					
2 continuous 0/4...20 mA and 0...10 V			1					
Ethernet:								
none				0				
with Ethernet				1				
Transducer supply:								
none					0			
24 V d.c.					1			
Version:								
standard						00		
custom-made [1]						XX		
Language:								
Polish							P	
English							E	
other [2]							X	
Additional quality requirements :								
without additional quality requirements								0
with an extra inspection quality certificate								1
acc. to customer's request [2]								X

IN STANDARDVERSION (RE92-0-1-0-0-0-00-E-0):

2 universal inputs
3 binary inputs
6 relay outputs
RS-485 Modbus Slave
supply 85...253 V a.c./d.c

[1] - the code will be established by the manufacturer
[2] - after agreeing with the manufacturer

Order example:

The code **RE92 -1-10-1-0-00-E-0** means: controller RE92, with additional input: current 0/4...20 mA, output 1 and 2:
2 relays, analog outputs: none, with Ethernet, transducer supply: none, standard version, English language, without additional quality requirements.

EXAMPLE OF APPLICATION

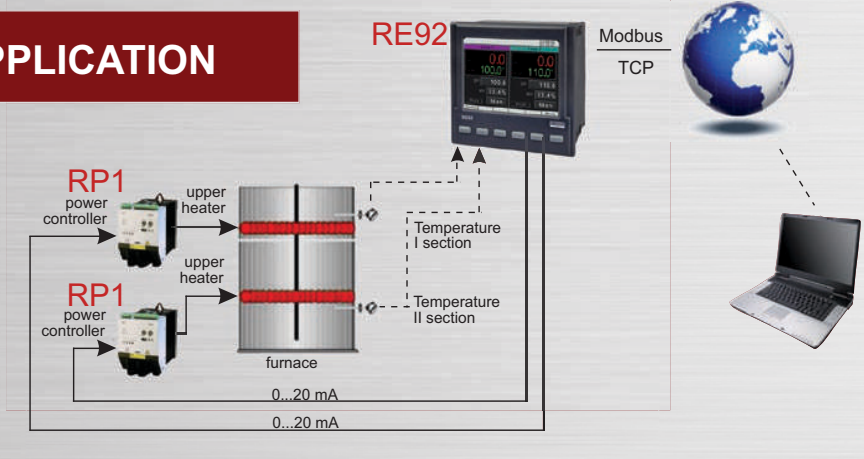

Temperature control in two-section furnace.

Sifam Tinsley Instrumentation Inc.
3105, Creekside Village Drive, Suite No. 801, Kennesaw,
Georgia 30144 (USA)
E-mail Id : psk@sifamtinsley.com
Web : www.sifamtinsley.com
Contact No. : +1 404 736 4903

Sifam Tinsley Instrumentation Ltd.
Central Buildings, Woodland Close,
Old Woods Trading Estate,
Torquay, Devon, England, TQ27BB
Web: www.sifamtinsley.com/uk
Contact No. : +44 (0) 1803 615139