
# E12357

## Wirable socket

SDOGF030MSSFKSG

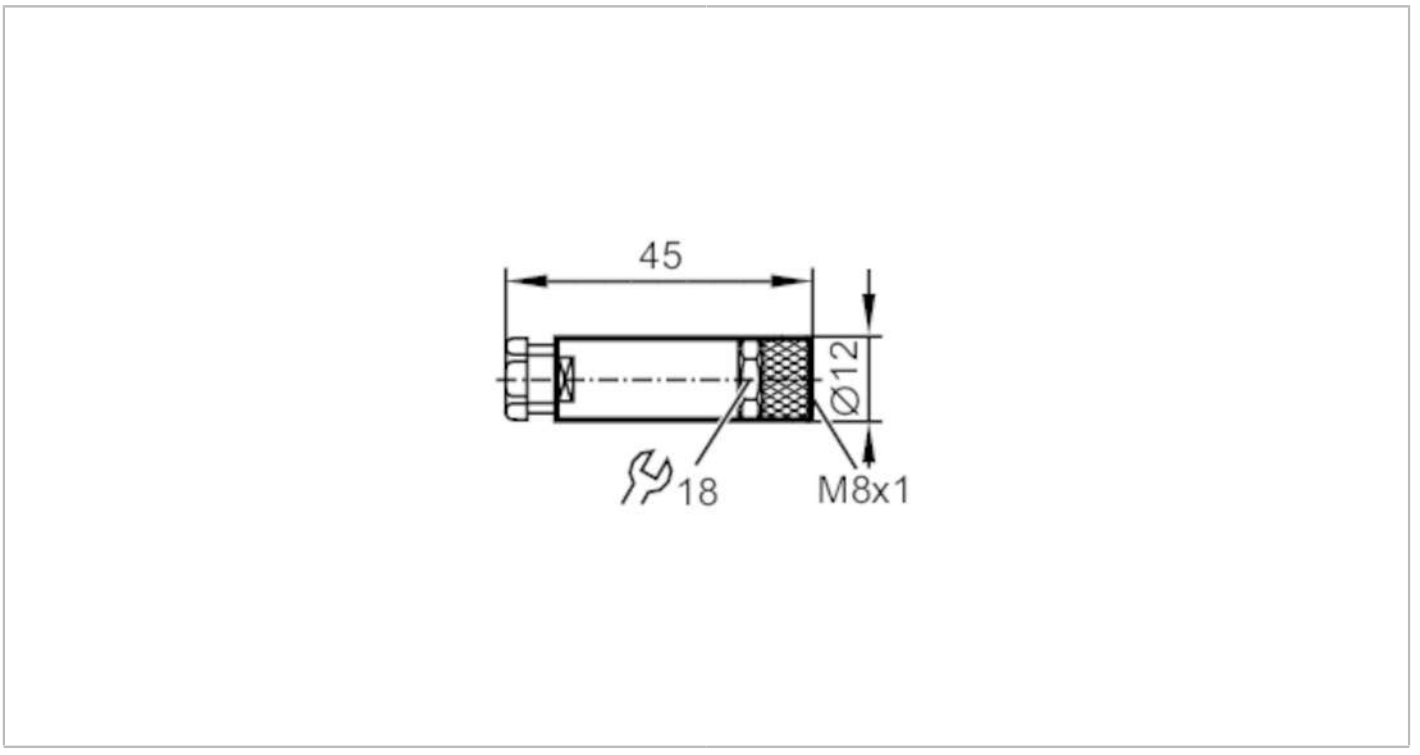


| | | |
|---|---|---|
| **Application** | | |
| Special feature | | Gold-plated contacts |
| **Electrical data** | | |
| Operating voltage | [V] | < 30 AC/DC |
| **Outputs** | | |
| Electrical design | | PNP |
| **Operating conditions** | | |
| Ambient temperature | [°C] | -40...85 |
| Protection | | IP 67 |
| **Mechanical data** | | |
| Weight | [g] | 8.733 |
| Dimensions | [mm] | 12 x 12 x 45 |
| Materials | | PBT; PA |
| Moulded-body material | | PBT / PA |
| Material nut | | brass, nickel-plated |
| **Remarks** | | |
| Pack quantity | | 1 pcs. |

**Electrical connection**

screw terminals: 0.14...0.5 mm²; Cable sheath: Ø 3.5...5 mm


**Electrical connection - socket**

Connector: 1 x M8, straight; coding: A; Moulded body: PBT / PA; Locking: brass, nickel-plated; Contacts: gold-plated

# E12357

## Wirable socket

SDOGF030MSSFKSG




## Connection

