TIMKEN

The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number LM503349 - LM503310, Tapered Roller Bearings - TS (Tapered Single) Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.



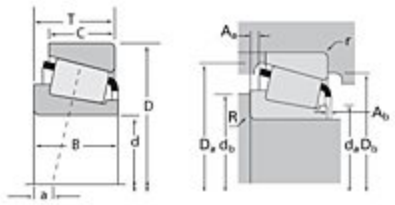

Specifications | Dimensions | Abutment and Fillet Dimensions | Basic Load Ratings | Factors

Specifications

Series	LM503300
Cone Part Number	LM503349
Cup Part Number	LM503310
Design Units	Imperial
Bearing Weight	0.300 Kg 0.70 lb
Cage Type	Stamped Steel

Dimensions

d - Bore	45.987 mm 1.8105 in
D - Cup Outer Diameter	74.976 mm 2.9518 in

B - Cone Width	18.001 mm 0.7087 in
C - Cup Width	14 mm 0.5512 in
T - Bearing Width	18.001 mm 0.7087 in

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius[1]	2.290 mm 0.090 in
r - Cup Backface "To Clear" Radius[2]	1.52 mm 0.06 in
da - Cone Frontface Backing Diameter	51.05 mm 2.01 in
db - Cone Backface Backing Diameter	55.12 mm 2.17 in
Da - Cup Frontface Backing Diameter	71.88 mm 2.83 in
Db - Cup Backface Backing Diameter	67.06 mm 2.64 in
Ab - Cage-Cone Frontface Clearance	2.3 mm 0.09 in
Aa - Cage-Cone Backface Clearance	0.5 mm 0.02 in
a - Effective Center Location[3]	-2.00 mm -0.08 in

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)[4]	17500 N 3930 lbf
C1 - Dynamic Radial Rating (1 million revolutions)[5]	67400 N 15100 lbf
C0 - Static Radial Rating	75400 N 17000 lbf
C_{a90} - Dynamic Thrust Rating (90 million revolutions)[6]	12000 N 2700 lbf

Factors

K - Factor[7]	1.45
e - ISO Factor[8]	0.40
Y - ISO Factor[9]	1.49
G1 - Heat Generation Factor (Roller-Raceway)	28.3
G2 - Heat Generation Factor (Rib-Roller End)	18.2
Cg - Geometry Factor	0.0789

[1] These maximum fillet radii will be cleared by the bearing corners.
[2] These maximum fillet radii will be cleared by the bearing corners.
[3] Negative value indicates effective center inside cone backface.
[4] Based on 90 x 10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.
[5] Based on 1 x 10^6 revolutions L_{10} life, for the ISO life calculation method.
[6] Based on 90 x 10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.
[7] These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.
[8] These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.
[9] These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

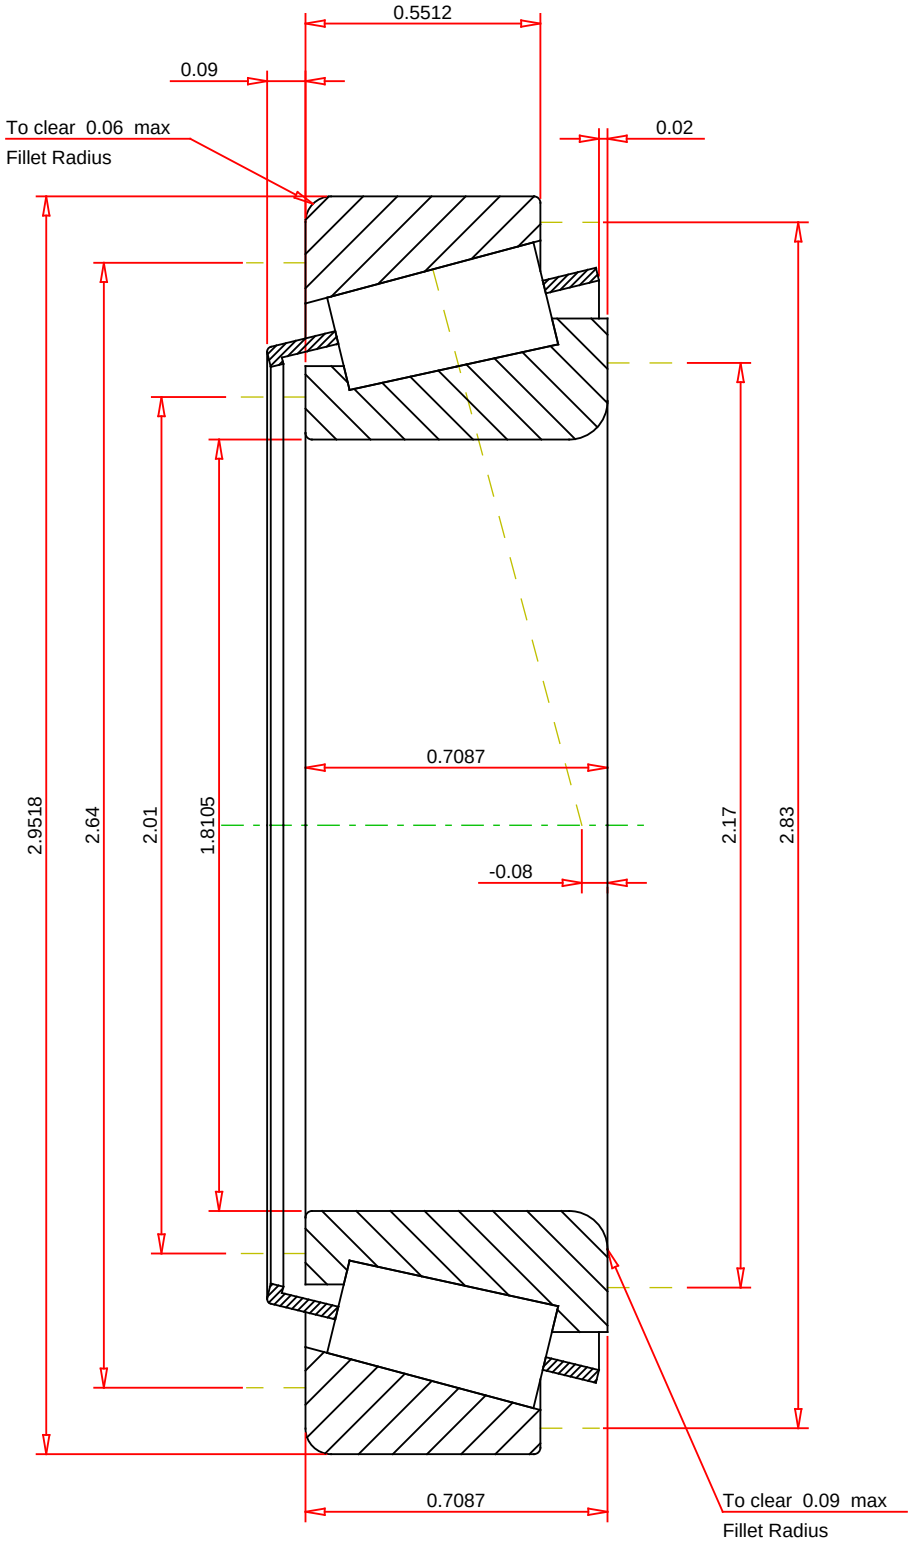

IMPERIAL UNITS

ISO Factor - e	0.4	
ISO Factor - Y	1.49	
Bearing Weight	0.7	lb
Number of Rollers Per Row	24	
Effective Center Location	-0.08	inch

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

LM503349 - LM503310
TS BEARING ASSEMBLY

K Factor	1.45	
Dynamic Radial Rating - C90	17500	lbf
Dynamic Thrust Rating - Ca90	12000	lbf
Static Radial Rating - C0	75400	lbf
Dynamic Radial Rating - C1	67400	lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY