THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	ECN 4087: CN RELEASE	7/12/09	B. ZHANG
C	ECN 4168: ADDED L-COM LOGO BOTH SIDES	8/4/09	D. CASTRO
D	ECN 6638: UPDATED FORMAT, PACKAGING, AND LOGOS	1/31/13	D. DESJARDIN
E	ECN 8163: ADDED HIPOT TEST NOTE 3. UPD ROHS.	11/6/15	D. DESJARDIN

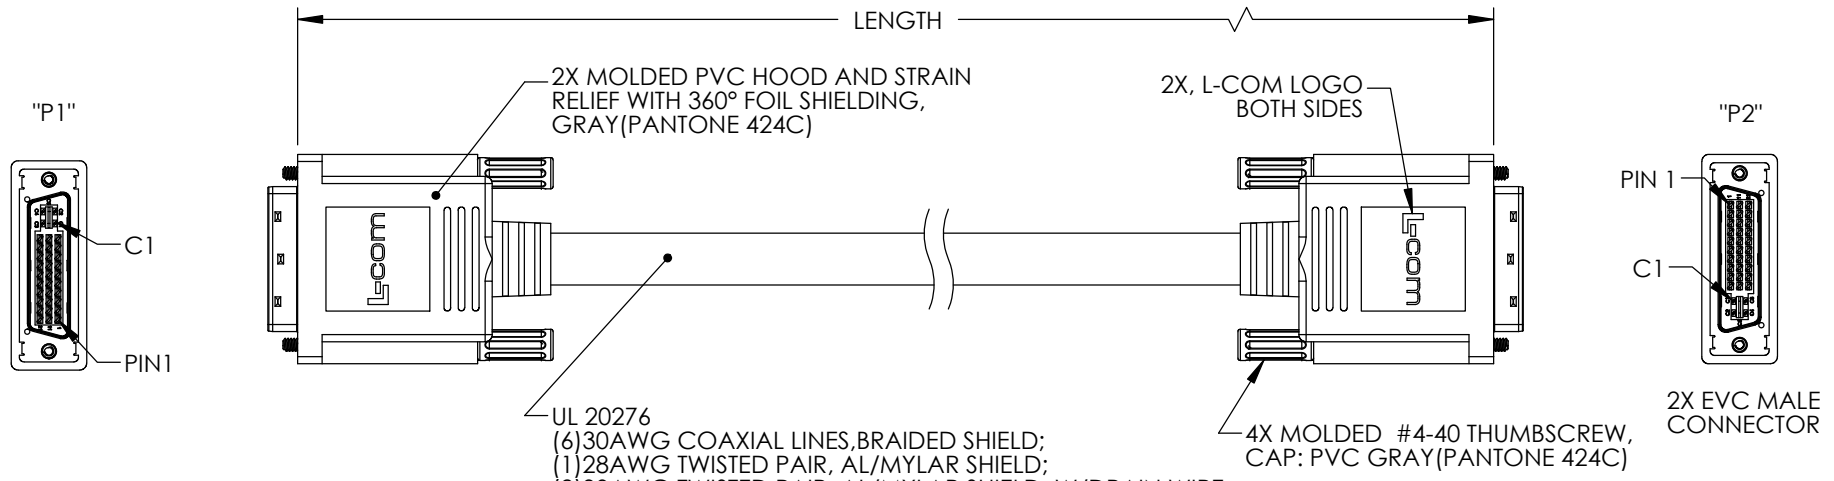

WIRING MAP

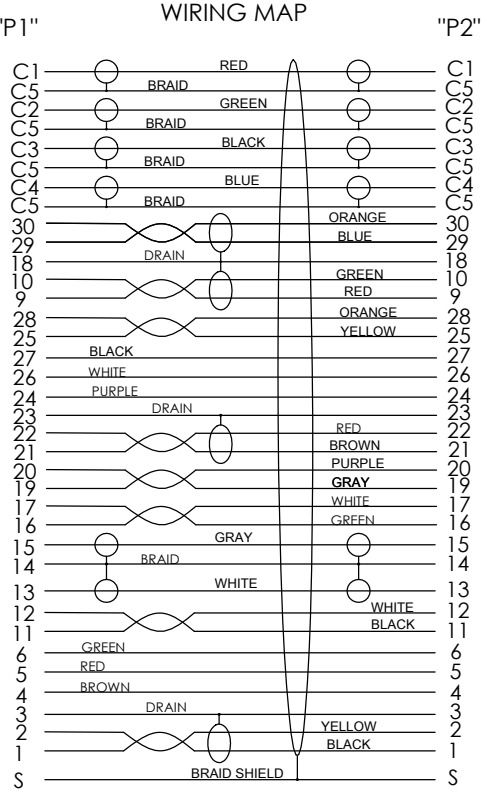

MODEL MUMBER	LENGTH	
	FEET	METERS
CTLEVCMM-3	3.0	0.91
CTLEVCMM-5	5.0	1.52
CTLEVCMM-10	10.0	3.05
CTLEVCMM-15	15.0	4.57
CTLEVCMM-25	25.0	7.62
CTLEVCMM-50	50.0	15.24

NOTES:

1. PINS 8,18 AND 28 RECESSED TO PROVIDE PROPER POWER/GROUND SEQUENCING
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. (E) CABLE ASSEMBLY SHALL PASS 750VDC HIPOT TEST.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

(E) **REGULATORY COMPLIANCE:**
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

APPROVALS		DATE
DRAWN BY	B. ZHANG	05/22/09
CHECKED BY	F. MAO	06/12/09
APPROVED BY	F. MAO	06/12/09

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR
REF

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
AUDIO/VIDEO

PRODUCT DESCRIPTION
CA VIDEO EVC M/EVC M

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CTLEVCMM	E

SCALE: NONE | CAD FILE: CTLEVCMM.SLDDRW | SHEET 1 OF 1