

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISION					
ZONE	REV.	DESCRIPTION	DATE	CHANGED BY	APPROVED
	E	ECO 12267	12/15/2022	PSRINIVAS	DGUST

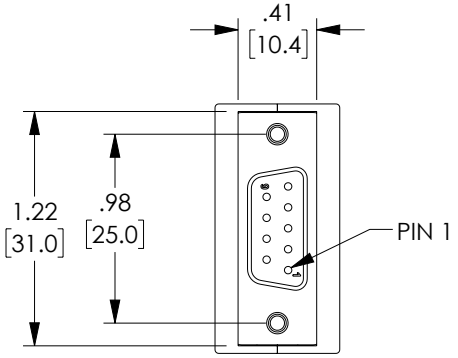



P1

DB9 FEMALE CONNECTOR SOLDERED TO PCB

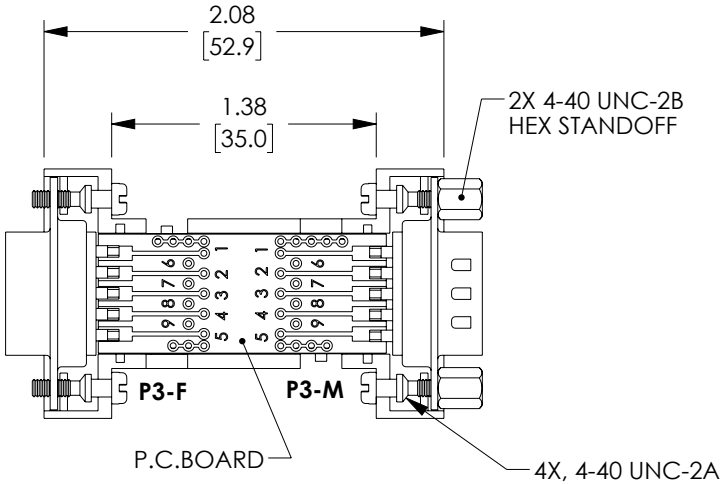

TOP VIEW WITHOUT COVER



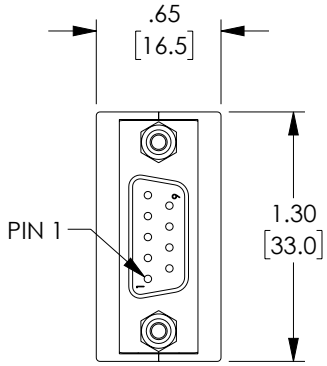

P2

DB9 MALE CONNECTOR SOLDERED TO PCB

PIN OUT

P1	P3-F	P3-M	P2
1	5	1	5
2	4	2	4
3	3	3	3
4	2	4	2
5	1	5	1
6	9	6	9
7	8	7	8
8	7	8	7
9	6	9	6

NOTES:

1. ENCLOSURE IS ABS PLASTIC COLOR: DARK GRAY.
2. COVER HALVES SNAP TOGETHER TO RETAIN CONNECTORS AND CAPTIVE HARDWARE.
3. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
4. COMPONENT ASSEMBLY IS SHIPPED UN-ASSEMBLED. (BAG : TAGGED)
5. 10 STRIPPED AND TINNED JUMPER WIRES ARE SUPPLIED. (NOT SHOWN)
6. COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5]
.XX = ± .02 [.5]
.XXX = ± .005 [.13]
FRACTIONS ± 1/32
ANGLES ± 1°

THIRD-ANGLE PROJECTION

APPROVALS	DATE
DRAWN BY DFRISIELLO	01/20/2012
CHECKED BY S.SMITH	01/20/2012
APPROVED BY S.SMITH	01/20/2012

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-com an INFINITE brand
50 High Street, West Mill,
North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

CATEGORY: D-SUBMINIATURE

PRODUCT DESCRIPTION: ADPT, KIT DB9M/F W/PCB& WIRES

SIZE	CAGE CODE	ITEM NO.	REV.
A	43321	DJB9MF	E

SCALE: NONE | CAD FILE: djb9mf.SLDDRW | SHEET 1 OF 1

T-Rev.D