# SKF Gloves

Personal protective equipment

## SKF Disposable Grease Resistant Gloves TMBA G11D

SKF TMBA G11D gloves are specially designed to protect skin when working with lubricants. The gloves are packed in a handy box containing 25 pairs.



- Non-powdered nitrile rubber gloves
- Tight fitting for precision wear
- Excellent resistance against lubricants
- Non-allergenic

| Technical data | |
|---|---|
| **Designation** | **TMBA G11D** |
| Material | Non powdered nitrile |
| Size | 9 |
| Colour | blue |
| Pack size | 25 pairs |





## SKF Heat Resistant Gloves TMBA G11

The SKF TMBA G11 are specially designed for the handling of heated bearings.

| Technical data | |
|---|---|
| **Designation** | **TMBA G11** |
| Material | Hytex |
| Inner lining | Cotton |
| Size | 9 |
| Colour | White |
| Maximum temperature | 150 °C *(302 °F)* |
| Pack size | 1 pair |

- Lint free.
- Heat resistant up to 150 °C *(302 °F)*.
- Cut resistant.
- Tested and certified for mechanical risks (EN 388) and thermal risks (EN 407).

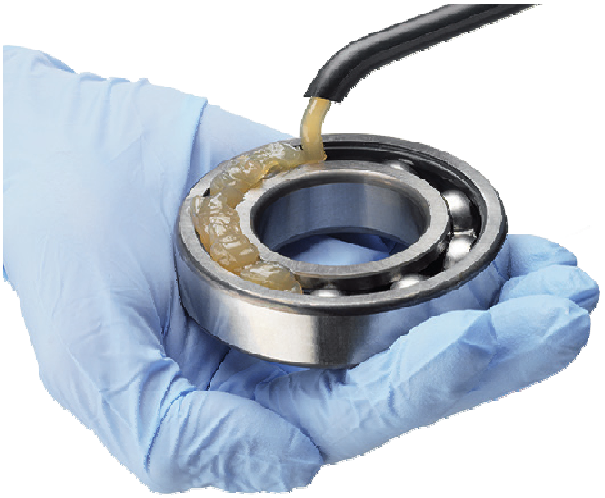

## SKF Extreme Temperature Gloves TMBA G11ET

The SKF TMBA G11ET are especially designed for the safe handling of heated bearings or other components for prolonged periods.

| Technical data | |
|---|---|
| **Designation** | **TMBA G11ET** |
| Material | Kevlar |
| Inner lining | Cotton |
| Size | 10 (EN 420 size) |
| Colour | Yellow |
| Maximum temperature | 500 °C *(932 °F)* |
| Pack size | 1 pair |

- Withstands extreme temperatures of up to 500 °C *(932 °F)* unless in the presence of hot liquid or steam.
- Allows the safe handling of heated components.
- High-degree of non-flammability reduces the risk of burning.
- Extremely tough Kevlar gloves with high cut, abrasion, puncture and tear resistance for increased safety.
- Lint free.
- Tested and certified for mechanical risks (EN 388) and thermal risks (EN 407).



## SKF Heat and Oil Resistant Gloves TMBA G11H

The SKF TMBA G11H are specially designed for the handling of hot and oily bearings.

| Technical data | |
|---|---|
| **Designation** | **TMBA G11H** |
| Material | Polyaramid |
| Inner lining | Nitrile |
| Size | 10 |
| Colour | Black |
| Maximum temperature | 250 °C *(482 °F)* |
| Pack size | 1 pair |

- Offers a high degree of heat, cut, oil and water resistance.
- Melt and burn resistant.
- Maximum temperature: 250 °C *(482 °F)*.
- Cut resistant.
- Lint free.
- Suitable for submerging in liquids with a temperature up to 120 °C *(248 °F)* (e.g. hot oil bath).
- Remains heat resistant when wet.
- Tested and certified for mechanical risks (EN 388) and thermal risks (EN 407).

**skf.com | mapro.skf.com | skf.com/lubrication**

® SKF is a registered trademark of the SKF Group.

© SKF Group 2016
The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

**PUB MP/P8 14368 EN** · April 2016