

3-phase comm.link PKZM0..f.1 aux.cont.

Part no. B3.1/2-PKZ0
Article no. 044945

Delivery programme

			
Product range			Accessories
Accessories			Three-phase commoning link
			Protected against accidental contact, short-circuit proof, U_e = 690 V, I_u = 63 A Can be extended by rotating by installation Attached on the right, for motor-protective circuit-breakers, with an auxiliary contact or trip-indicating auxiliary contact
Circuit-breaker		Number	2
Length		mm	99
Unit width		mm	45 + 9

Notes

For parallel power feed to several motor-protective circuit-breakers on terminals 1, 3, 5

Approvals

Product Standards	UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking
UL File No.	E36332
UL CCN	NLRV
CSA File No.	98494
CSA Class No.	3211-06
NA Certification	UL listed, CSA certified
Specially designed for NA	No

Main conducting paths

Rated impulse withstand voltage	U_{imp}	V AC	6000
Overvoltage category/pollution degree			III/3
Rated operational voltage	U_e	V AC	690
Rated uninterrupted current	I_u	A	63

Technical data ETIM 4.0

Insulated			YES
Number of phases			3
Cross-section		mm^2	0
Rated uninterrupted current Iu		A	63
Length		mm	99
Rated conditional short-circuit current Iq		kA	0
Rated impulse voltage		kV	6
Design of electrical connection			Fork connector
Rated short-time withstand current Icw		kA	0
Suitable for devices with auxiliary contacts			No
Suitable for devices with neutral pole			No
Suitable for number of devices			2
Max. rated operating voltage Ue		V	690
Unit width		mm	54

Dimensions

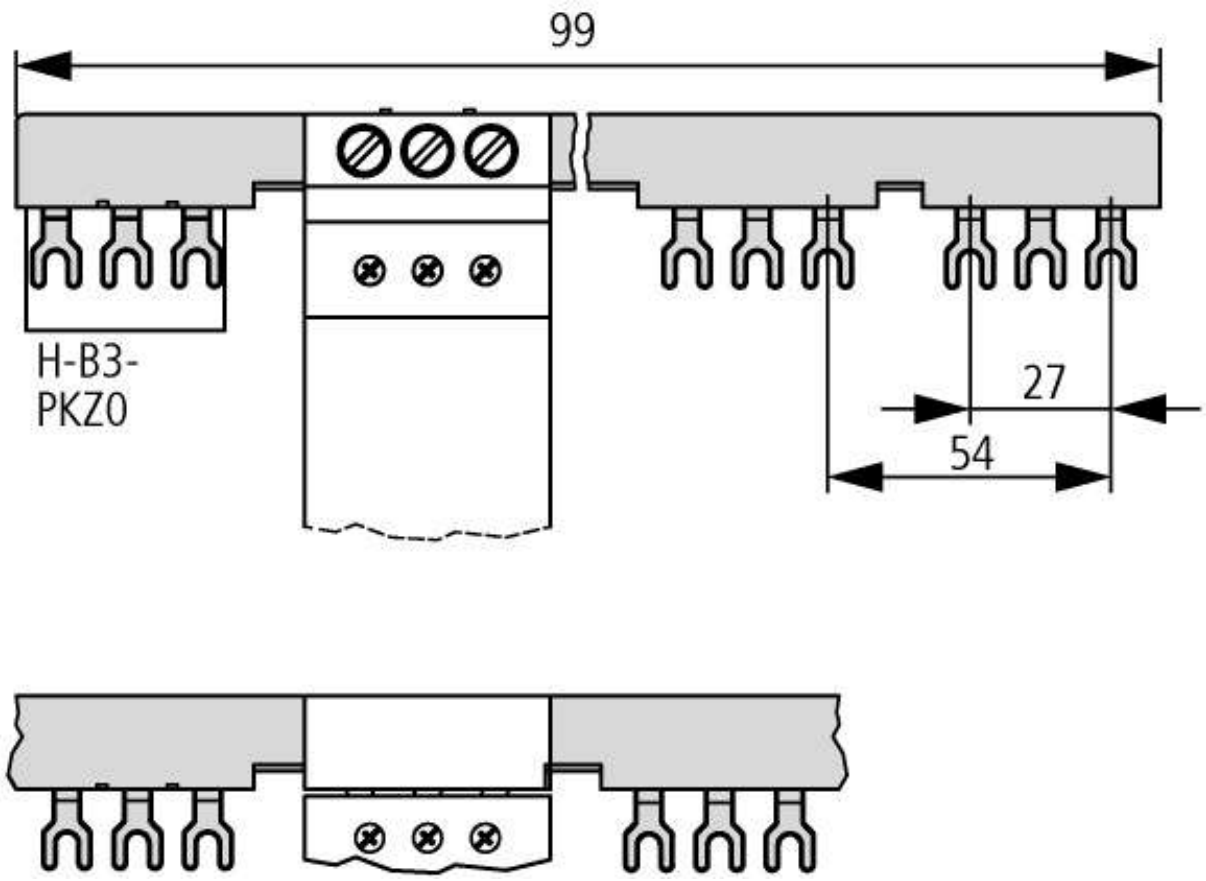

Overlapping mounting to extend the three-phase commoning link
Three-phase commoning link

Additional product information (links)

AWA1210-2295 Three-phase commoning link	
AWA1210-2295 Three-phase commoning link	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/22950506.pdf
Motor starters and "Special Purpose Ratings" for the North American market	http://www.moeller.net/binary/ver_techpapers/ver953en.pdf
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf

© 05/2012 by Eaton Industries GmbH