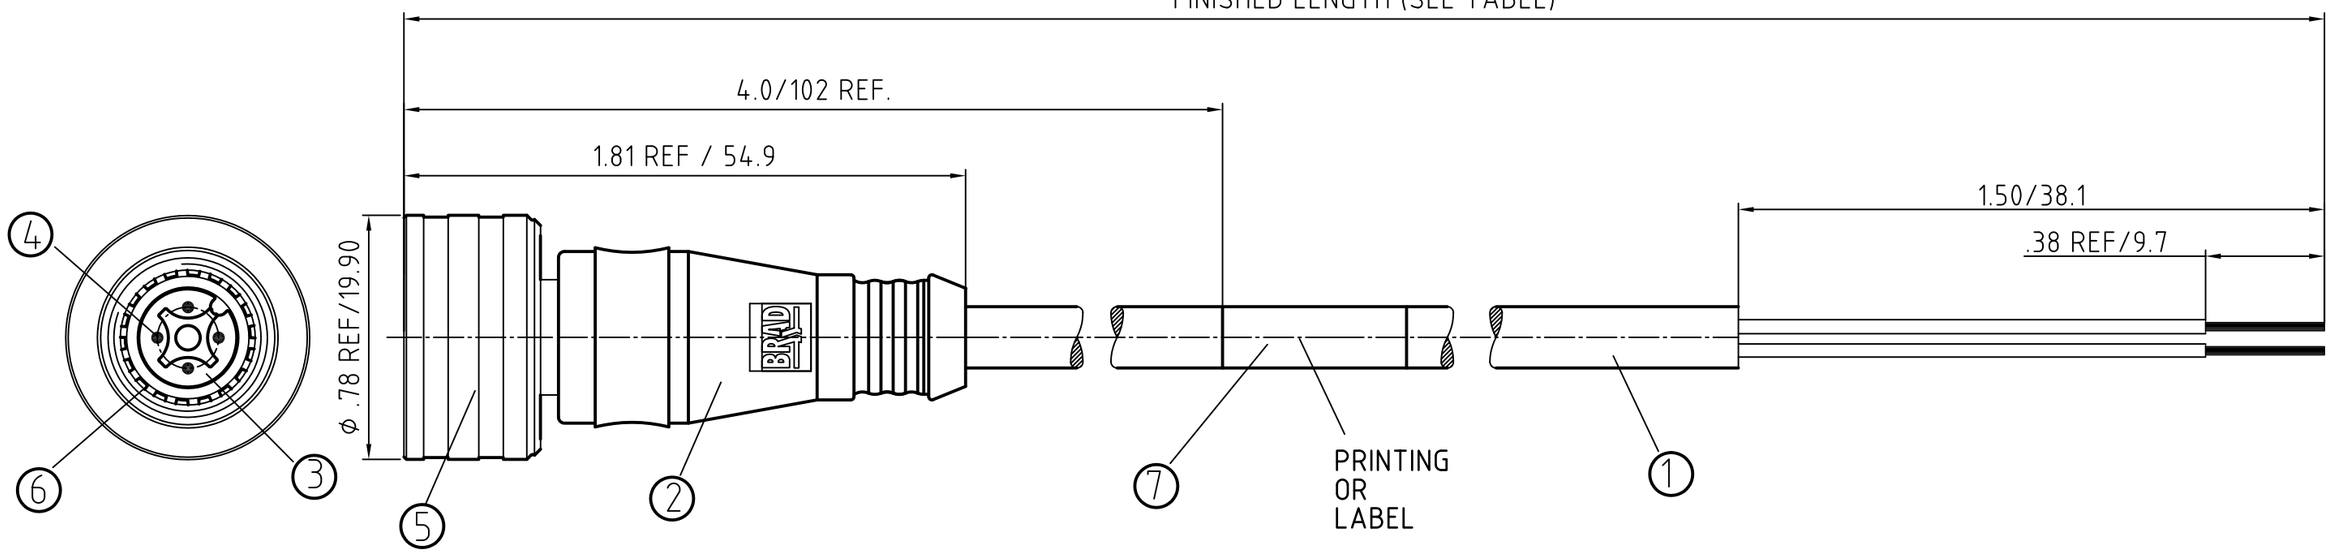


POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200790263	W04006E03M020	6.56' +3.5" -0 [2.0M +89 -0]




POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200790273	W05006E03M020	6.56' +3.5" -0 [2.0M +89 -0]

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67/68/69K
OPERATING TEMPERATURE	-30°C TO +80°C
UL CERTIFICATIONS	UL STYLE 2464
CSA CERTIFICATIONS	I/II A/B 80°/300V

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	VITON	GREEN
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	TPE (PUR)	YELLOW
1	CABLE- 22/3-5 AWG (COPPER STRANDING) 4 CONDUCT. 300V	JACKET: PVC	JACKET: BLACK

MALE FACE VIEW

3-POLE	4-POLE	5-POLE
		

WIRING DIAGRAM

3-POLE	4-POLE	5-POLE
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 GREY

DESCRIPTION
EC NO: WEU2010-0360 2010/02/12
DRWN: LSTEMMLE 2010/02/12
CH'KD: NS ----
APPR: FPACHER 2010/02/16
DESCRIPTION
1
REV

QUALITY SYMBOLS
▼ = 0
Ⓒ = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±---	±.01
1 PLACE	±0.3	±---
ANGULAR ±	--- °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 2:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: LSTEMMLE DATE: 2010/02/12
CHECKED BY: FP DATE: 2010/02/15
APPROVED BY: FPACHER DATE: 2010/02/15

MICRO-CHANGE ULTRA LOCK
3-5-POLE MALE STRAIGHT
#22/3-5 PVC BLACK CABLE

MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-120079-034
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION