
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES DMA030MF	8/23/12	D.FRISIELLO
B	ECN 9209: REVISED "REVERSER" LABEL, NEW FORMAT	5/17/18	D.FRISIELLO

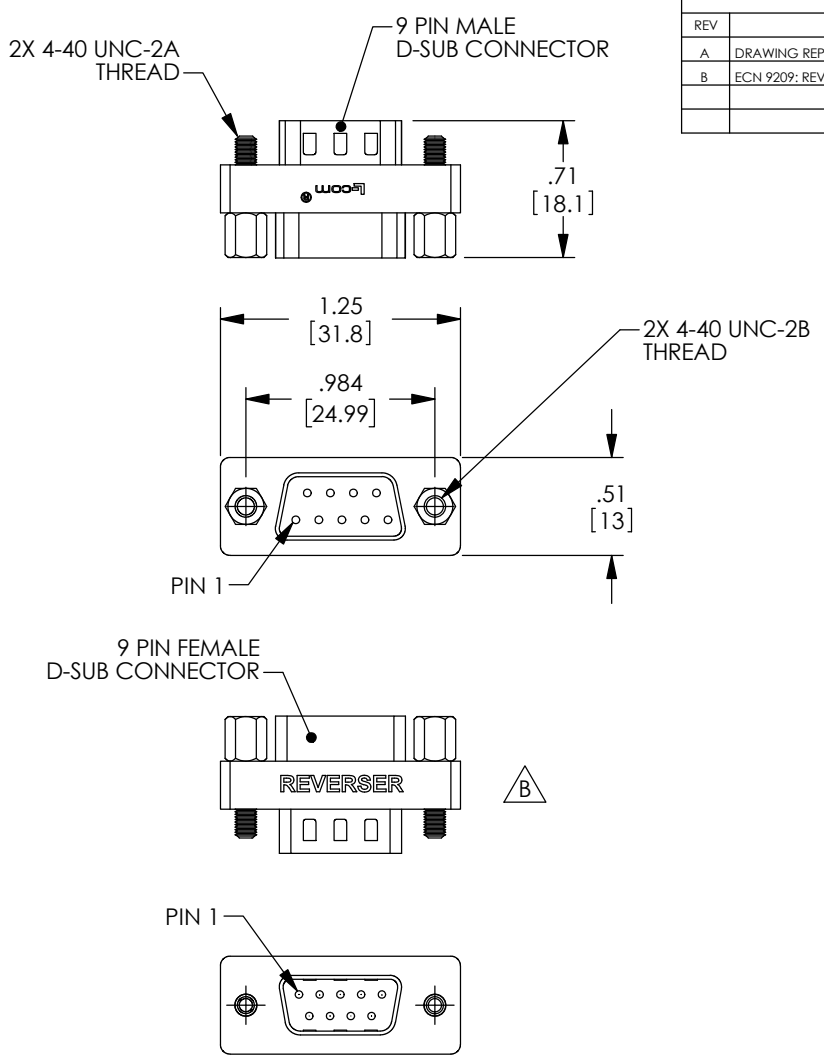

DB9F	DB9M
PIN 1	PIN 1
PIN 2	PIN 3
PIN 3	PIN 2
PIN 4	PIN 4
PIN 5	PIN 5
PIN 6	PIN 6
PIN 7	PIN 7
PIN 8	PIN 8
PIN 9	PIN 9

NOTES:

1. ALL CONTACTS ARE GOLD PLATED OVER NICKEL.
2. COMPLETE 360° SHIELDING.
3. EXPOSED STEEL SURFACES ARE TIN PLATED, AND JACKSCREWS ARE NICKEL PLATED.
4. CONNECTOR INSULATORS ARE GLASS FILLED PBT.
5. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

APPROVALS	DATE
DRAWN BY C.McCORMICK	02/12/01
CHECKED BY D.PARHAM	02/16/01
APPROVED BY R.CARRICK	02/13/01

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
50 HIGH STREET
NORTH ANDOVER, MA
01845

CATEGORY
D-SUBMINIATURE

PRODUCT DESCRIPTION
ADAPTER, REVERSER 2&3 DB9M/F

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	DMA030MF	B

SCALE: NONE | CAD FILE: DMA030MF.SLDDRW | SHEET 1 OF 1