Sicherheits-Prüfspitze

- mit axialer Sicherheitsbuchse
- kompakte Bauform
- niedriger Übergangswiderstand bei hoher Härte (Spitze aus vergoldetem Kupfer-Beryllium)
- Steckanschluss Ø 4 mm
- Kontaktierung in 4 mm Buchsen durch Abnahme der Spitzenschutzkappe möglich
- die Spitzenschutzkappe SSK 9192 ist im Lieferumfang enthalten
- für eine fachgerechte Anwendung unserer Produkte müssen die Sicherheitshinweise in unserem Katalog beachtet werden

Best.-Nr. SPS 9406 Ni / ..(Farbe)


- Kontaktteile **Messing vernickelt**
- Kontaktspitze CuBe2 vergoldet
- **Farben** siehe Tabelle

Safety test probe

- *with inline safety socket*
- *compact design*
- *low contact resistance with high hardness (tip made of gold-plated copper beryllium)*
- *socket Ø 4 mm*
- *contacting in 4 mm sockets possible by removing the tip protection cap*
- *including tip protection cap SSK 9192*
- *for a professional application of our products, the safety instructions in our catalogue must be observed*

Order No. SPS 9406 Ni / *..(colour)*

- *contact parts* ***Brass nickel-plated***
- *contact tip* *CuBe2 gold-plated*
- ***colours*** *see table*

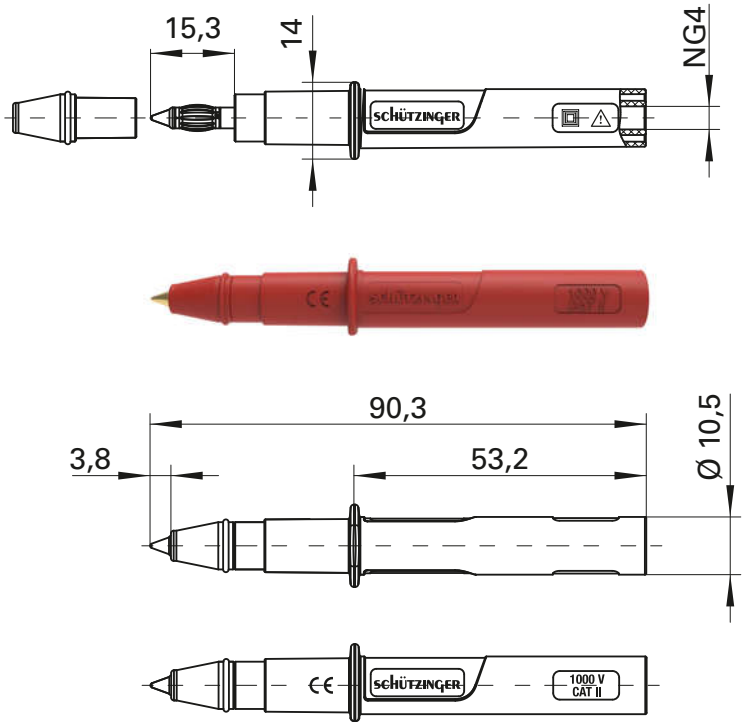

Allgemeine Angaben	
Best.-Nr. [1]	**SPS 9406 Ni /** ..(Farbe) Kontaktteile Messing vernickelt
Farben	schwarz, rot
Technische Daten	
Anschluss	Sicherheitsbuchse
Bemessungsspannung [2]	1000 V CAT II
Bemessungsstrom [2]	10 A
Betriebstemperatur	von -25 °C bis +80 °C

General information	
Order No. [1]	***SPS 9406 Ni /*** *..(colour)* *contact parts Brass nickel-plated*
colours	*black, red*
Technical data	
terminal	*safety socket*
rated voltage [2]	*1000 V CAT II*
rated current [2]	*10 A*
operating temperature	*from -25 °C to +80 °C*

[1] andere Kontaktoberflächen und Farben auf Anfrage
[2] bei normalen Umgebungstemperaturen

[1] *other contact platings and colours on request*
[2] *at normal ambient temperatures*