


FAG


UKP210

Plummer block housing unit

Plummer block housing units UKP, cast iron housing, with long base, radial insert ball bearing with adapter sleeve, RSR seals

Technical information



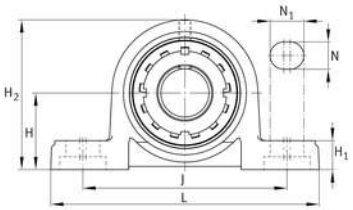

Your current product variant

Material	GG	Grey cast iron
Housing clearance	J7	Normal swivel torque

Main Dimensions & Performance Data

d	45 mm	Bore diameter
L	206 mm	Length total
H_2	114 mm	Height
≈m	2.95 kg	Weight

Mounting dimensions

J	159 mm	Distance fixing bore
N	20 mm	Width (slot)
N_1	25 mm	Length (slot)

Dimensions

H	57.2 mm	Distance shaft axis
A	60 mm	Width (base)
H_1	21 mm	Heigth (base)
B_1	55 mm	Locking collar total width
Q	M6	Connection thread for lubrication

The data sheet only contains an overview of the technical data of the selected product. Please refer to the additional documentation for this product. For further information, please use the following link on our website: Contact form

Additional information

	P210	Housing
	UK210	Bearing designation

Temperature range

T_{min}	-20 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

The data sheet only contains an overview of the technical data of the selected product. Please refer to the additional documentation for this product. For further information, please use the following link on our website: Contact form